



Network Video Recorder

User Manual

UD.6L0202D1245A01

Hikvision® Network Digital Video Recorder User Manual

This manual, as well as the software described in it, is furnished under license and may be used or copied only in accordance with the terms of such license. The content of this manual is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by Hikvision Digital Technology Co., Ltd. (Hikvision). Hikvision assumes no responsibility or liability for any errors or inaccuracies that may appear in the book.

Except as permitted by such license, no part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of Hikvision.

HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, REGARDING THE HIKVISION SOFTWARE. HIKVISION DOES NOT WARRANT, GUARANTEE, OR MAKE ANY REPRESENTATIONS REGARDING THE USE OR THE RESULTS OF THE USE OF THE HIKVISION SOFTWARE IN TERMS OF ITS CORRECTNESS, ACCURACY, RELIABILITY, CURRENTNESS, OR OTHERWISE. THE ENTIRE RISK AS TO THE RESULTS AND PERFORMANCE OF THE HIKVISION SOFTWARE IS ASSUMED BY YOU. THE EXCLUSION OF IMPLIED WARRANTIES IS NOT PERMITTED BY SOME STATES. THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

IN NO EVENT WILL HIKVISION, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES (INCLUDING DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, AND THE LIKE) ARISING OUT OF THE USE OR INABILITY TO USE THE HIKVISION SOFTWARE EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

Regulatory information

FCC information

FCC compliance: This equipment has been tested and found to comply with the limits for a digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the Low Voltage Directive 2006/95/EC, the EMC Directive 2004/108/EC.



2002/96/EC (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info.



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info.

Preventive and Cautionary Tips

Before connecting and operating your device, please be advised of the following tips:

- Ensure unit is installed in a well-ventilated, dust-free environment.
- Unit is designed for indoor use only.
- Keep all liquids away from the device.
- Ensure environmental conditions meet factory specifications.
- Ensure unit is properly secured to a rack or shelf. Major shocks or jolts to the unit as a result of dropping it may cause damage to the sensitive electronics within the unit.
- Use the device in conjunction with an UPS if possible.
- Power down the unit before connecting and disconnecting accessories and peripherals.
- A factory recommended HDD should be used for this device.
- Improper use or replacement of the battery may result in hazard of explosion. Replace with the same or equivalent type only. Dispose of used batteries according to the instructions provided by the battery manufacturer.

Thank you for purchasing our product. If there is any question or request, please do not hesitate to contact dealer.
The figures in the manual are for reference only.

This manual is applicable to the models listed in the following table.

Series	Model	Type
7100NI-SL	DS-7104NI-SL DS-7108NI-SL	Network Video Recorder
7100NI-SL/W	DS-7104NI-SL/W	Network Video Recorder
7100NI-SN	DS-7104NI-SN DS-7108NI-SN DS-7116NI-SN	Network Video Recorder
7100NI-SN/N	DS-7104NI-SN/N DS-7108NI-SN/N DS-7116NI-SN/N	Network Video Recorder
7100NI-SN/P	DS-7104NI-SN/P DS-7108NI-SN/P DS-7116NI-SN/P	Network Video Recorder
7600NI-SN	DS-7604NI-SN DS-7608NI-SN DS-7616NI-SN	Network Video Recorder
7600NI-SN/N	DS-7604NI-SN/N DS-7608NI-SN/N DS-7616NI-SN/N	Network Video Recorder
7600NI-SN/P	DS-7604NI-SN/P DS-7608NI-SN/P DS-7616NI-SN/P	Network Video Recorder

Product Key Features

General

- Connectable to network cameras, network dome and encoders.
- Connectable to the third-party network cameras like AXIS, Brickcom, Bosch, PANASONIC, SAMSUNG and SANYO, and network cameras that adopt ONVIF or PSIA protocol.
- PAL/NTSC adaptive video inputs.
- Each channel supports dual-stream.
- Up to 16 network cameras can be connected.
- Independent configuration for each channel, including resolution, frame rate, bit rate, image quality, etc.
- The quality of the input and output record is configurable.

Local Monitoring

- Simultaneous HDMI and VGA outputs.
- HDMI output and VGA output at up to 1920×1080 resolution.
- Multiple screen display in live view is supported, and the display sequence of channels is adjustable.
- Live view screen can be switched in group, and manual switch and auto-switch live view are also provided, and the interval of auto-switch can be adjusted.
- Quick setting menu is provided for live view.
- Motion detection, tamper-proof, video exception alert and video loss alert functions.
- Privacy mask.
- Multiple PTZ protocols supported; PTZ preset, patrol and pattern.
- Zooming in by clicking the mouse and PTZ tracing by dragging mouse.

HDD Management

- Up to 2 SATA hard disk can be connected, with a maximum of 4TB storage capacity.
- Support S.M.A.R.T. and bad sector detection.
- HDD quota management; different capacity can be assigned to different channel.

Recording and Playback

- Holiday recording schedule configuration.
- Continuous and event video recording parameters.
- Multiple recording types: manual, continuous, and motion.
- 8 recording time periods with separated recording types.
- Pre-record and post-record for motion detection for recording, and pre-record time for schedule and manual recording.
- Searching record files by motion detection.
- Tag adding for record files, searching and playing back by tags.
- Locking and unlocking record files.
- Searching and playing back record files by channel number, recording type, start time, end time, etc.
- Zooming in when playback.
- Reverse playback of multi-channel.
- Supports pause, play reverse, fast forward, slow forward, skip forward, and skip backward when playback, and locating by dragging the mouse.
- Up to 8-ch synchronous playback at 4CIF real time.

Backup

- Export video data by USB or SATA device.
- Export video clips when playback.
- Management and maintenance of backup devices.

Alarm and Exception

- Alarm for video loss, motion detection, tampering, abnormal signal, video input/output standard mismatch, illegal login, network disconnected, IP confliction, abnormal record, HDD error, and HDD full, etc.
- Alarm triggers full screen monitoring, audio alarm, notifying surveillance center, sending email and alarm output.
- Automatic restore when system is abnormal.

Other Local Functions

- Operable by mouse and remote control.
- Three-level user management; admin user is allowed to create many operating accounts and define their operating permission, which includes the limit to access any channel.
- Operation, alarm, exceptions and log recording and searching.
- Import and export of device configuration information.

Network Functions

- 1 self-adaptive 10M/100M/1000M network interface for DS-7116NI-SN, DS-7116NI-SN/N, DS-7116NI-SN/P, DS-7616NI-SN, DS-7616NI-SN/N and DS-7616NI-SN/P, and 1 self-adaptive 10M/100M network interface for other models.
- Up to 8 independent PoE network interfaces are provided for DS-7600NI-SN/P and DS-7100NI-SN/P series.
- Up to 8 independent built-in switch network interfaces are provided for DS-7600NI-SN/N and DS-7100NI-SN/N series.
- IPv6 is supported.
- TCP/IP protocol, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, and iSCSI are supported.
- TCP, UDP and RTP for unicast.
- Auto/Manual port mapping by UPnP™.
- Remote reverse playback via RTSP.
- Support accessing by the platform via ONVIF.
- Remote search, playback, download, locking and unlocking of the record files, and support downloading files broken transfer resume.
- Remote parameters setup; remote import/export of device parameters.
- Remote viewing of the device status, system logs and alarm status.
- Remote locking and unlocking of mouse.
- Remote HDD initializing and program upgrading.
- Remote system restart and shutdown.
- Event and exception information can be sent to the remote host.
- Remotely start/stop recording.
- Remote PTZ control.
- Two-way audio and voice broadcasting.
- Embedded WEB server.

Development Scalability:

- SDK for Windows and Linux system.

- Source code of application software for demo.
- Development support and training for application system.

TABLE OF CONTENTS

Product Key Features	6
Chapter 1 Introduction	12
1.1 Front Panel	13
1.2 IR Remote Control Operations	15
1.3 USB Mouse Operation	18
1.4 Input Method Description.....	19
1.5 Rear Panel	20
Chapter 2 Getting Started.....	24
2.1 Starting Up and Shutting Down the NVR.....	25
2.2 Using the Wizard for Basic Configuration.....	27
2.3 Adding and Editing the IP Cameras.....	32
2.3.1 Adding the Online IP Cameras.....	32
2.3.2 Editing the Connected IP cameras and Configuring Customized Protocols.....	35
2.3.3 Editing IP Cameras Connected to the PoE Interfaces.....	38
2.3.4 Editing IP Cameras Connected to the Built-in Switch Network Interfaces	39
Chapter 3 Live View	42
3.1 Introduction of Live View	43
3.2 Operations in Live View Mode.....	44
3.2.1 Using the Mouse in Live View	44
3.2.2 Quick Setting Toolbar in Live View Mode.....	45
3.3 Adjusting Live View Settings	47
3.4 User Logout.....	49
Chapter 4 PTZ Controls.....	50
4.1 Setting PTZ Presets, Patrols & Patterns.....	51
4.1.1 Customizing Presets	51
4.1.2 Calling Presets	51
4.1.3 Customizing Patrols	53
4.1.4 Calling Patrols.....	54
4.1.5 Customizing Patterns	55
4.1.6 Calling Patterns	56
4.2 PTZ Control Toolbar	57
Chapter 5 Record Settings	58
5.1 Configuring Recording Parameters	59
5.2 Configuring Record Schedule	61
5.3 Configuring Motion Detection Record	64
5.4 Manual Record	66
5.5 Configuring Holiday Record	67
5.6 Files Protection.....	69
Chapter 6 Playback	71
6.1 Playing Back Record Files	72
6.1.1 Playing Back by Channel.....	72

6.1.2	Playing Back by Time	74
6.1.3	Playing Back by Event Search	76
6.1.4	Playing Back by Tag	78
6.1.5	Playing Back by System Logs.....	80
6.1.6	Playing Back External File.....	82
6.2	Auxiliary Functions of Playback	83
6.2.1	Playing Back Frame by Frame	83
6.2.2	Digital Zoom.....	83
6.2.3	Reverse Playback of Multi-channel	83
Chapter 7 Backup.....		85
7.1	Backing up Record Files	86
7.1.1	Quick Export.....	86
7.1.2	Backing up by Normal Video Search	87
7.1.3	Backing up by Event Search	92
7.1.4	Backing up Video Clips	94
7.2	Managing Backup Devices	96
Chapter 8 Alarm Settings		100
8.1	Setting Motion Detection Alarm.....	101
8.2	Detecting Video Loss Alarm.....	103
8.3	Detecting Video Tampering Alarm	105
8.4	Handling Exceptions Alarm.....	107
8.5	Setting Alarm Response Actions	108
Chapter 9 Network Settings		109
9.1	Configuring General Settings	110
9.2	Configuring Advanced Settings	112
9.2.1	Configuring PPPoE Settings	112
9.2.2	Configuring WIFI	112
9.2.3	Configuring DDNS	114
9.2.4	Configuring NTP Server	117
9.2.5	Configuring Remote Alarm Host	118
9.2.6	Configuring Multicast	119
9.2.7	Configuring RTSP.....	119
9.2.8	Configuring Server and HTTP Ports	120
9.2.9	Configuring Email	120
9.2.10	Configuring UPnP™.....	121
9.2.11	Configuring High-speed Download	123
9.3	Checking Network Traffic	125
9.4	Configuring Network Detection	126
9.4.1	Testing Network Delay and Packet Loss.....	126
9.4.2	Exporting Network Packet	126
9.4.3	Checking the Network Status	127
9.4.4	Checking Network Statistics	128
Chapter 10 HDD Management		130
10.1	Initializing HDDs	131

10.2	Checking HDD Status	133
10.3	HDD Detection.....	135
10.4	Configuring HDD Error Alarms	137
Chapter 11	Camera Settings	138
11.1	Configuring OSD Settings.....	139
11.2	Configuring Privacy Mask.....	140
11.3	Configuring Image Parameters	141
Chapter 12	NVR Management and Maintenance	142
12.1	Viewing System Information.....	143
12.1.1	Viewing Device Information.....	143
12.1.2	Viewing Camera Information.....	143
12.1.3	Viewing Record Information.....	143
12.1.4	Viewing Network Information	144
12.1.5	Viewing HDD Information	144
12.2	Searching & Export Log Files	146
12.3	Importing/Exporting Configuration Files	149
12.4	Upgrading System	150
12.4.1	Upgrading by Local Backup Device	150
12.4.2	Upgrading by FTP.....	150
12.5	Restoring Default Settings.....	152
Chapter 13	Others.....	153
13.1	Configuring General Settings	154
13.2	Configuring DST Settings	155
13.3	Configuring More Settings for Device Parameters.....	156
13.4	Managing User Accounts.....	157
13.4.1	Adding a User	157
13.4.2	Deleting a User	159
13.4.3	Editing a User	160
Appendix	161
	Glossary	162
	Troubleshooting	163
	List of Compatible IP Cameras	169
	List of Hikvision IP Cameras	169
	List of Third-party IP Cameras.....	172

Chapter 1 Introduction

1.1 Front Panel

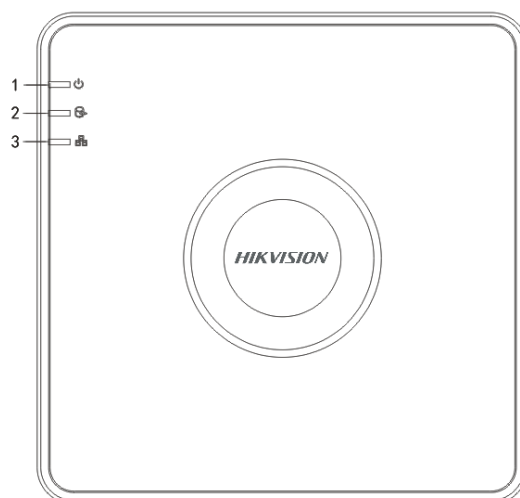


Figure 1. 1 Front Panel of DS-7100NI Series



This panel is applicable to the DS-7100NI-SL, DS-7100NI-SL/W, DS-7100NI-SN, DS-7100NI-SN/N and DS-7100NI-SN/P series NVR.

Table 1. 1 Description of Front Panel

No.	Icon	Description
1		Indicator turns red when DVR is powered up.
2		Indicator lights in red when data is being read from or written to HDD.
3		Indicator blinks blue when network connection is functioning properly.

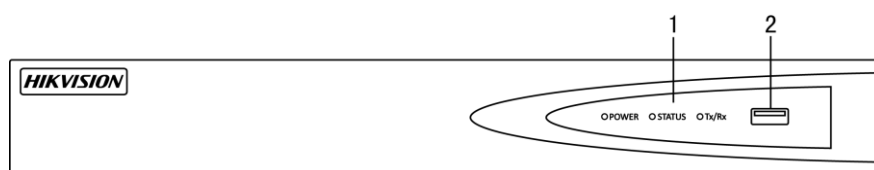


Figure 1. 2 Front Panel of DS-7600NI Series



This panel is applicable to the DS-7600NI-SN, DS-7600NI-SN/N and DS-7600NI-SN/P series NVR.

Table 1. 2 Description of Front Panel

No.	Name		Description
1	Status	Power	Power indicator turns yellow when system is running.

No.	Name		Description
	Indicator	Status	Status indicator blinks red when data is being read from or written to HDD.
		Tx/Rx	TX/RX indicator blinks yellow when network connection is functioning properly.
2	USB Interface		Universal Serial Bus (USB) ports for additional devices such as USB mouse and USB Hard Disk Drive (HDD).

1.2 IR Remote Control Operations

The NVR may also be controlled with the included IR remote control (not supported with the DS-7100NI series NVR), shown in Figure 1.3.



Batteries (2×AAA) must be installed before operation.

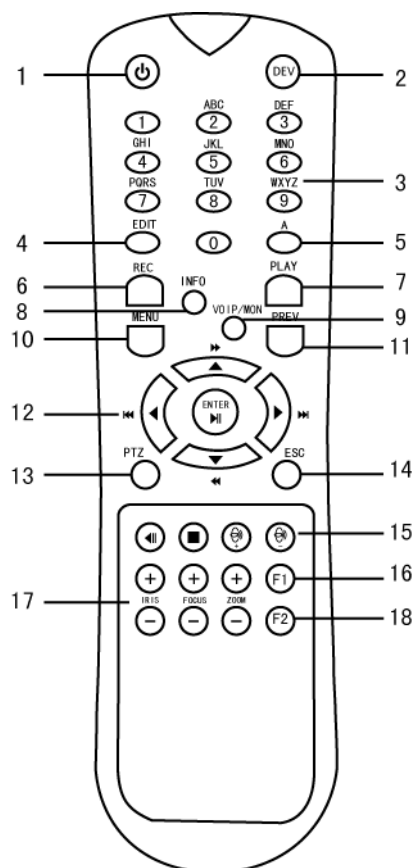


Figure 1.3 Remote Control

Table 1.3 Description of the Soft Keyboard Icons

No.	Name	Description
1	POWER	Power on/off the device.
2	DEV	Enables/Disables Remote Control.
3	Alphanumeric Buttons	Switch to the corresponding channel in Live view or PTZ Control mode.
		Input numbers and characters in Edit mode.
		Switch between different channels in the Playback mode.
4	EDIT Button	Edit text fields. When editing text fields, it will also function as a Backspace button to delete the character in front of the cursor.
		On checkbox fields, pressing the button will <i>check</i> the checkbox.
		In PTZ Control mode, the button adjusts the iris of the camera.

No.	Name	Description
		In Playback mode, it can be used to generate video clips for backup.
		Enter/exit the folder of USB device.
5	A Button	Adjust focus in the PTZ Control menu.
		It is also used to switch between input methods (upper and lowercase alphabet, symbols and numeric input).
6	REC Button	Enter the Manual Record setting menu.
		In PTZ control settings, press the button and then you can call a PTZ preset by pressing Numeric button.
		It is also used to turn audio on/off in the Playback mode.
7	PLAY Button	The button is used to enter the All-day Playback mode.
		It is also used to auto scan in the PTZ Control menu.
8	INFO Button	Reserved.
9	VOIP Button	Switch between main and spot output.
		In PTZ Control mode, it can be used to zoom out the image.
10	MENU Button	Press the button will help you return to the Main menu (after successful login).
		Press and hold the button for 5 seconds will turn off audible key beep.
		In PTZ Control mode, the MENU button will start wiper (if applicable).
		In Playback mode, it is used to show/hide the control interface.
11	PREV Button	Switch between single screen and multi-screen mode.
		In PTZ Control mode, it is used to adjust the focus in conjunction with the A/FOCUS+ button.
12	DIRECTION Button	Navigate between different fields and items in menus.
		In the Playback mode, the Up and Down button is used to speed up and slow down recorded video. The Left and Right button will select the next and previous record files.
		In Live View mode, these buttons can be used to cycle through channels.
		In PTZ control mode, it can control the movement of the PTZ camera.
	ENTER Button	Confirm selection in any of the menu modes.
		It can also be used to <i>tick</i> checkbox fields.
		In Playback mode, it can be used to play or pause the video.
		In single-frame Playback mode, pressing the button will advance the video by a single frame.
13	PTZ Button	In Auto-switch mode, it can be used to stop /start auto switch.
14	ESC Button	Back to the previous menu.
		Press for Arming/disarming the device in Live View mode.
15	RESERVED	Reserved for future usage.
16	F1 Button	Select all items on the list when used in a list field.
		In PTZ Control mode, it will turn on/off PTZ light (if applicable).
		In Playback mode, it is used to switch between play and reverse play.
17	PTZ Control Buttons	Buttons to adjust the iris, focus and zoom of a PTZ camera.

No.	Name	Description
18	F2 Button	Cycle through tab pages.
		In synchronous playback mode, it is used to switch between channels.

Troubleshooting Remote Control:

Make sure you have installed batteries properly in the remote control. And you have to aim the remote control at the IR receiver in the front panel.

If there is no response after you press any button on the remote, follow the procedure below to troubleshoot.

Steps:

1. Go to Menu > Settings > General > More Settings by operating the front control panel or the mouse.
2. Check and remember NVR ID#. The default ID# is 255. This ID# is valid for all the IR remote controls.
3. Press the DEV button on the remote control.
4. Enter the NVR ID# you set in step 2.
5. Press the ENTER button on the remote.

If the Status indicator on the front panel turns blue, the remote control is operating properly. If the Status indicator does not turn blue and there is still no response from the remote, please check the following:

- Batteries are installed correctly and the polarities of the batteries are not reversed.
- Batteries are fresh and not out of charge.
- IR receiver is not obstructed.

If the remote still cannot function properly, please change a remote and try again, or contact the device provider.

1.3 USB Mouse Operation

A regular 3-button (Left/Right/Scroll-wheel) USB mouse can also be used with this NVR. To use a USB mouse:

1. Plug USB mouse into one of the USB interfaces on the front panel of the NVR.
2. The mouse should automatically be detected. If in a rare case that the mouse is not detected, the possible reason may be that the two devices are not compatible, please refer to the recommended the device list from your provider.

The operation of the mouse:

Table 1. 4 Description of the Mouse Control

Name	Action	Description
Left-Click	Single-Click	Live view: Select channel and show the quick set menu. Menu: Select and enter.
	Double-Click	Live view: Switch between single-screen and multi-screen.
	Click and Drag	PTZ control: pan, tilt and zoom. Tamper-proof, privacy mask and motion detection: Select target area. Digital zoom-in: Drag and select target area. Live view: Drag channel/time bar.
Right-Click	Single-Click	Live view: Show menu. Menu: Exit current menu to upper level menu.
Scroll-Wheel	Scrolling up	Live view: Previous screen. Menu: Previous item.
	Scrolling down	Live view: Next screen. Menu: Next item.

1.4 Input Method Description



Figure 1. 4 Soft Keyboard

Description of the buttons on the soft keyboard:

Table 1. 5 Description of the Soft Keyboard Icons

Icons	Description	Icons	Description
En	English	A	Capital English
123	Numbers	[Symbol]	Symbols
a	Lowercase/Uppercase	[Symbol]	Backspace
[Space]	Space	Enter	Enter
ESC	Exit		

1.5 Rear Panel

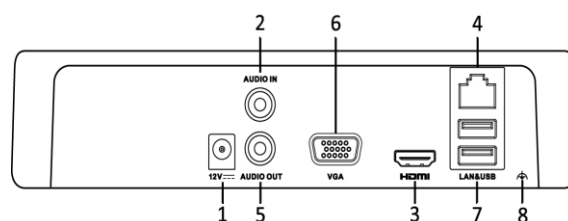


Figure 1.5 DS-7100NI-SL and DS-7100NI-SN

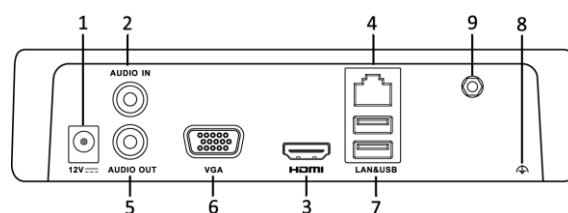


Figure 1.6 DS-7100NI-SL/W

Table 1.6 Description of Rear Panel

No.	Item	Description
1	Power Supply	12VDC power supply.
2	Audio In	RCA connector for two-way audio input.
3	HDMI Interface	HDMI video output connector.
4	Network Interface	Connector for LAN (Local Area Network).
5	Audio Out	RCA connector for audio output.
6	VGA Output	DB9 connector for VGA output. Display local video output and menu.
7	USB Interface	Universal Serial Bus (USB) ports for additional devices such as USB mouse and USB Hard Disk Drive (HDD).
8	Ground	Ground (needs to be connected when NVR starts up).
9	Antenna Interface (for DS-7100NI-SL/W series NVR only)	Needs to be connected with antenna if you want to configure and get connection via WLAN.

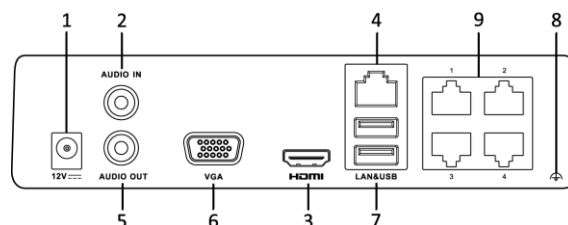


Figure 1.7 DS-7104NI-SN/N

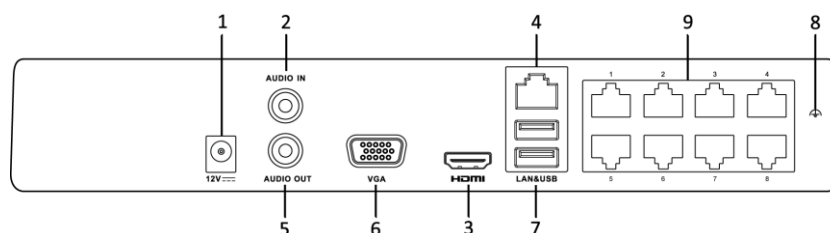


Figure 1. 8 DS-7108 & 7616NI-SN/N

Table 1. 7 Description of Rear Panel

No.	Item	Description
1	Power Supply	12VDC power supply.
2	Audio In	RCA connector for two-way audio input.
3	HDMI Interface	HDMI video output connector.
4	Network Interface	Connector for LAN (Local Area Network).
5	Audio Out	RCA connector for audio output.
6	VGA Output	DB9 connector for VGA output. Display local video output and menu.
7	USB Interface	Universal Serial Bus (USB) ports for additional devices such as USB mouse and USB Hard Disk Drive (HDD).
8	Ground	Ground (needs to be connected when NVR starts up).
9	Network Interfaces with switch function (for DS-7600NI-SN/N)	Network interface for the cameras.

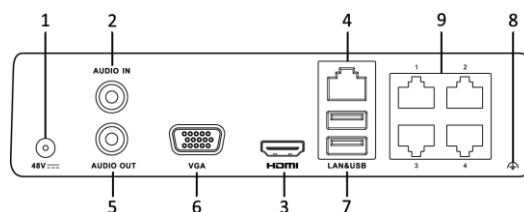


Figure 1. 9 DS-7104NI-SN/P

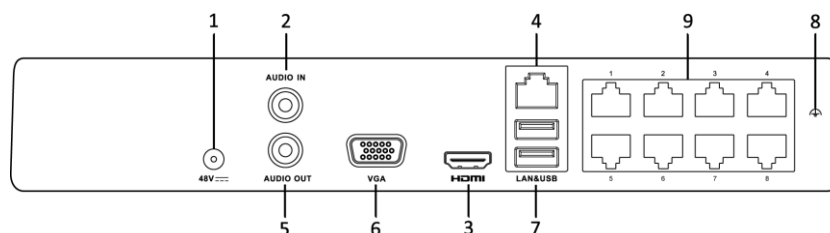


Figure 1. 10 DS-7108 & 7116NI-SN/P

Table 1. 8 Description of Rear Panel

No.	Item	Description
1	Power Supply	48VDC power supply.
2	Audio In	RCA connector for two-way audio input.
3	HDMI Interface	HDMI video output connector.
4	Network Interface	Connector for LAN (Local Area Network).

No.	Item	Description
5	Audio Out	RCA connector for audio output.
6	VGA Output	DB9 connector for VGA output. Display local video output and menu.
7	USB Interface	Universal Serial Bus (USB) ports for additional devices such as USB mouse and USB Hard Disk Drive (HDD).
8	Ground	Ground (needs to be connected when NVR starts up).
9	Network Interfaces with PoE function (for DS-7600NI-SN/N)	Network interface for the cameras and to provide power over Ethernet.

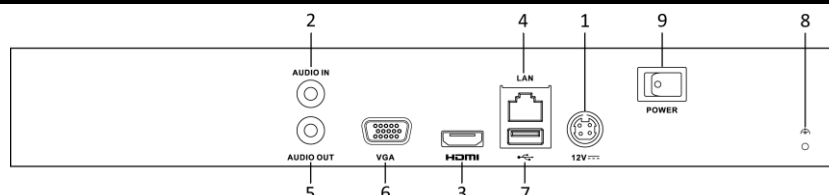


Figure 1. 11 DS-7600NI-SN

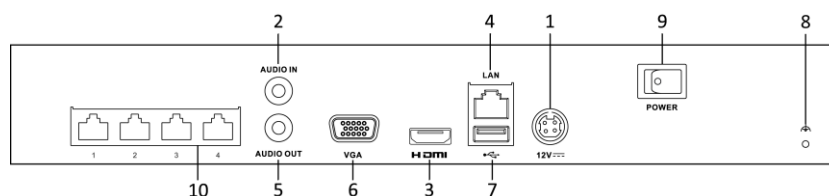


Figure 1. 12 DS-7604NI-SN/N

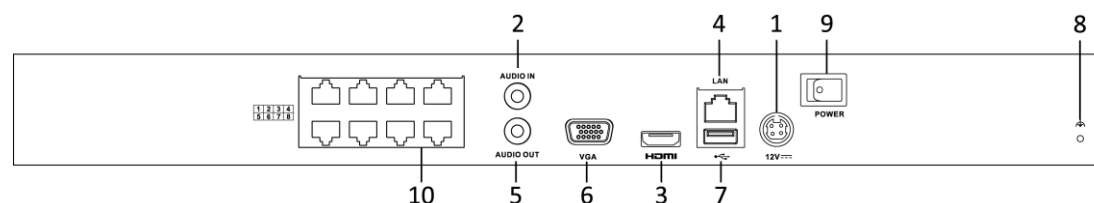


Figure 1. 13 DS-7608 & 7616NI-SN/N

Table 1. 9 Description of Rear Panel

No.	Item	Description
1	Power Supply	12VDC power supply.
2	Audio In	RCA connector for two-way audio input.
3	HDMI Interface	HDMI video output connector.
4	Network Interface	Connector for LAN (Local Area Network).
5	Audio Out	RCA connector for audio output.
6	VGA Output	DB9 connector for VGA output. Display local video output and menu.
7	USB Interface	Universal Serial Bus (USB) ports for additional devices such as USB mouse and USB Hard Disk Drive (HDD).
8	Ground	Ground (needs to be connected when NVR starts up).
9	Power Switch	Switch for turning on/off the device.
10	Network Interfaces with switch function (for DS-7600NI-SN/N)	Network interface for the cameras.

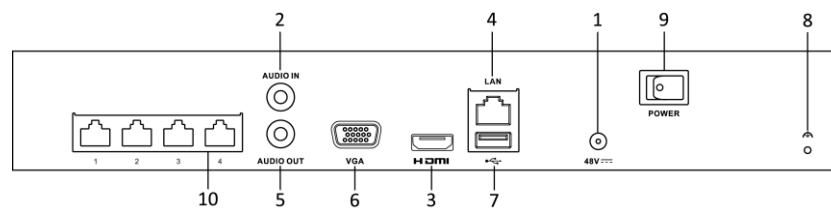


Figure 1. 14 DS-7604NI-SN/P

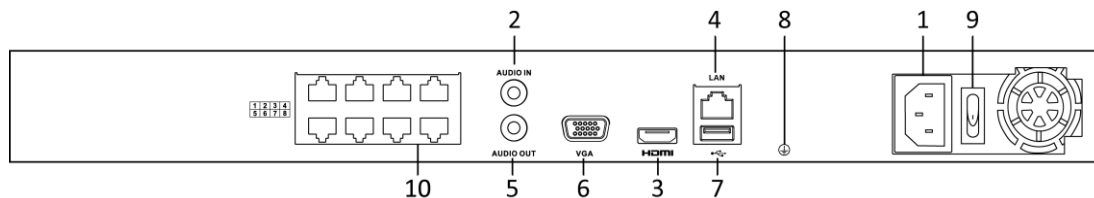


Figure 1. 15 DS-7608 & 7616NI-SN/P

Table 1. 10 Description of Rear Panel

No.	Item	Description
1	Power Supply	48VDC power supply for DS-7604NI-SN/P, and 100~240VAC power supply for DS-7608 & 7616NI-SN/P
2	Audio In	RCA connector for two-way audio input.
3	HDMI Interface	HDMI video output connector.
4	Network Interface	Connector for LAN (Local Area Network).
5	Audio Out	RCA connector for audio output.
6	VGA Output	DB9 connector for VGA output. Display local video output and menu.
7	USB Interface	Universal Serial Bus (USB) ports for additional devices such as USB mouse and USB Hard Disk Drive (HDD).
8	Ground	Ground (needs to be connected when NVR starts up).
9	Power Switch	Switch for turning on/off the device.
10	Network Interfaces with PoE function	Network interface for the cameras and to provide power over Ethernet.

Chapter 2 Getting Started

2.1 Starting Up and Shutting Down the NVR

Purpose:

Proper startup and shutdown procedures are crucial to expanding the life of the NVR.

Before you start:

Check that the voltage of the extra power supply is the same with the NVR's requirement, and the ground connection is working properly.

Starting up the NVR:

Steps:

1. Check the power supply is plugged into an electrical outlet. It is **HIGHLY** recommended that an Uninterruptible Power Supply (UPS) be used in conjunction with the device.
2. After startup, the Power LED indicator blinks red. A splash screen with the status of the HDD appears on the monitor.

Shutting down the NVR

Steps:

1. Enter the Shutdown menu.

Menu > Shutdown

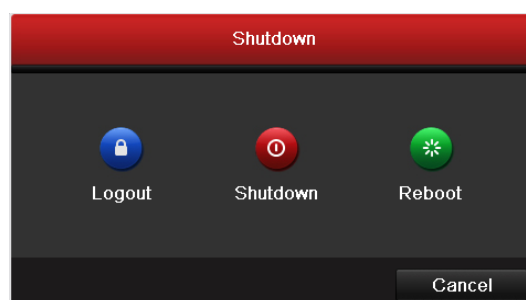


Figure 2. 1 Shutdown Menu

2. Click the **Shutdown** button.
3. Click the **Yes** button.
4. Unplug the power supply (for DS-7100NI series NVR) or turn off the power switch (for DS-7600NI series NVR) on the rear panel when the shutdown attention pops up.

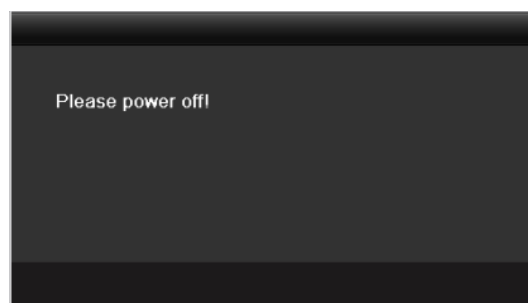


Figure 2. 2 Shutdown Attention

Rebooting the NVR

In the Shutdown menu, you can also reboot the NVR.

Steps:

1. Enter the **Shutdown** menu by clicking Menu > Shutdown.
2. Click the **Logout** button to lock the NVR or the **Reboot** button to reboot the NVR.

2.2 Using the Wizard for Basic Configuration

By default, the Setup Wizard starts once the NVR has loaded, as shown in Figure below.

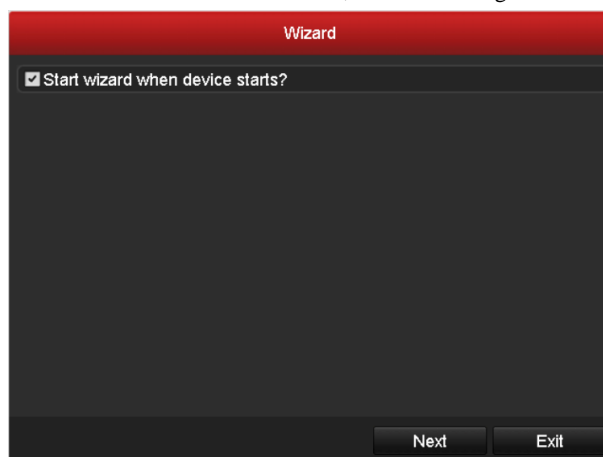


Figure 2.3 Start Wizard Interface

Operating the Setup Wizard:

1. The Setup Wizard can walk you through some important settings of the NVR. If you don't want to use the Setup Wizard at that moment, click the **Exit** button. You can also choose to use the Setup Wizard next time by leaving the "Start wizard when the device starts?" checkbox checked.
2. Click **Next** button on the Wizard window to enter the **Login** window, as shown in Figure 2.4.

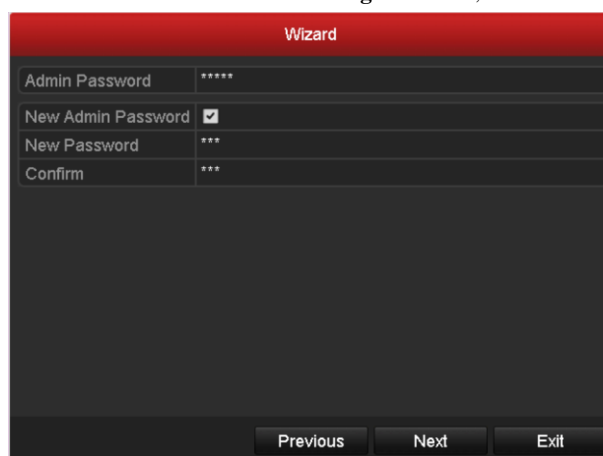


Figure 2.4 Login Window

-
3. Enter the admin password. By default, the password is 12345.
 4. To change the admin password, check the **New Admin Password** checkbox. Enter the new password and confirm the password in the given fields.
 5. Click the **Next** button to enter the date and time settings window, as shown in Figure 2.5.

Wizard	
Time Zone	(GMT+08:00) Beijing, Urumqi, Singapore
Date Format	MM-DD-YYYY
System Date	05-08-2013
System Time	15:22:59

Previous Next Exit

Figure 2. 5 Date and Time Settings

6. After the time settings, click **Next** button which takes you to the Network Setup Wizard window, as shown in Figure 2. 6.

Wizard	
NIC Type	10M/100M Self-adaptive
Enable DHCP	<input type="checkbox"/>
IPv4 Address	172.16.23.185
IPv4 Subnet Mask	255.255.255.0
IPv4 Default Gateway	172.16.23.1
Preferred DNS Serv...	8.8.8.8
Alternate DNS Server	

Previous Next Exit

DS-7100NI-SL, DS-7100NI-SN and DS-7600NI-SN

Wizard	
Working Mode	Multi-address
Select NIC	WLAN
NIC Type	10M/100M Self-adaptive
Enable DHCP	<input type="checkbox"/>
IPv4 Address	192.168.254.100
IPv4 Subnet Mask	255.255.255.0
IPv4 Default Gateway	192.168.254.1
Preferred DNS Serv...	8.8.8.8
Alternate DNS Server	
Default Route	LAN

Previous Next Exit

DS-7100NI-SL/W

Wizard	
NIC Type	10M/100M Self-adaptive
Enable DHCP	<input type="checkbox"/>
IPv4 Address	172.6.23.191
IPv4 Subnet Mask	255.255.255.0
IPv4 Default Gateway	172.6.23.1
Preferred DNS Serv...	
Alternate DNS Server	
Internal NIC IPv4 Ad...	192.168.254.1
<div>Previous Next Exit</div>	

DS-7100NI-SN/P, DS-7100NI-SN/N, DS-7600NI-SN/P and DS-7600NI-SN/N

Figure 2. 6 Network Configuration



The DS-7100NI-SL/W series NVR supports LAN and WLAN connections. Both the parameters can be configured separately by selecting the NIC type in the **Select NIC** drop-down list.

- For DS-7100NI-SL/W series NVR only, clicking the **Next** button will guide you to the WIFI parameters configuration.

Wizard				
SSID	71test			
Work Channel	autoSelect			
Encrypt Mode	TKIP_AES			
Encrypt Key	0123456789			
Security Type	Disable			
DHCP Start-Stop	192.168.254.100 192.168.254.254			
IP Address	MAC Address	Rate	RSSI	BandWidth
<div>Previous Next Exit</div>				

Figure 2. 7 WIFI Configuration



For detailed description of each parameter, please refer to the *Chapter 9.2.2 Configuring WIFI*.

- Click **Next** button takes you to the **HDD Management** window, shown in Figure 2. 8.

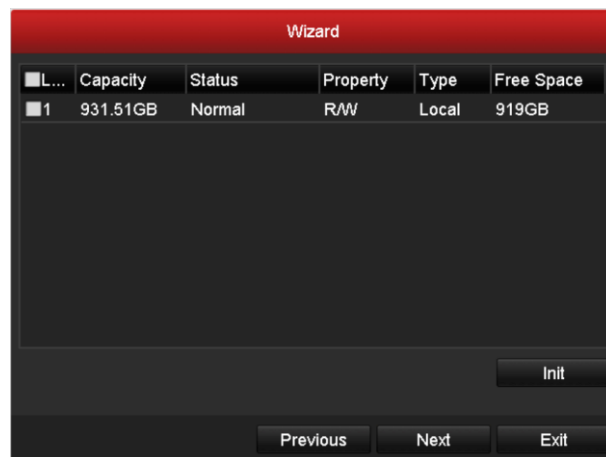


Figure 2. 8 HDD Management

9. To initialize the HDD, click the **Init** button. Initialization removes all the data saved in the HDD.
10. Click **Next** button to enter the **Adding IP Camera** interface.
11. Click **Search** to find online IP Camera. Select the IP camera to be added, and click the **Add** button.



Figure 2. 9 Search for IP Cameras

12. Click **Next** button. Configure the recording for the searched IP Cameras.

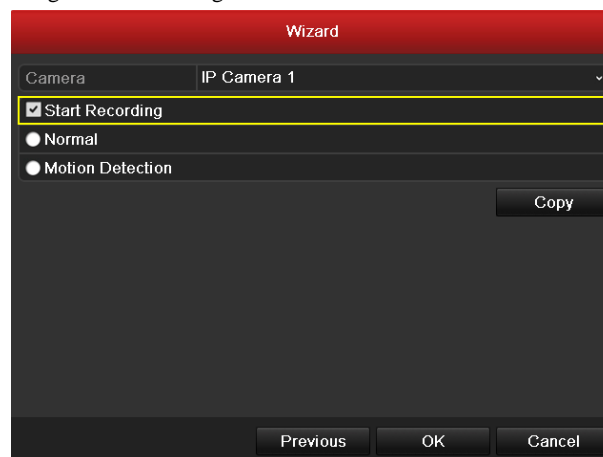


Figure 2. 10 Record Settings

13. Click **Copy** to copy the settings to other channels, as shown in Figure 2. 11.

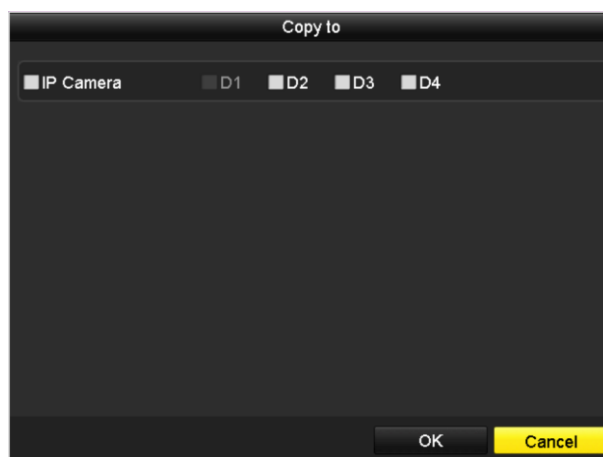


Figure 2. 11 Copy Record Settings

-
14. Click **OK** to complete the startup Setup Wizard.

2.3 Adding and Editing the IP Cameras

2.3.1 Adding the Online IP Cameras

Purpose:

The main function of the NVR is to connect the network cameras and record the video got from it. So before you can get a live view or record of the video, you should add the network cameras to the connection list of the device.

Before you start:

Ensure the network connection is valid and correct. For detailed checking and configuring of the network, please see *Chapter Checking Network Traffic* and *Chapter Configuring Network Detection*.

● **OPTION 1:**

Steps:

1. Right-click the mouse when you in the live view mode to show the right-click menu.
2. Select **Add IP Camera** in the pop-up menu and select **Auto** or **Manual** on your demand.

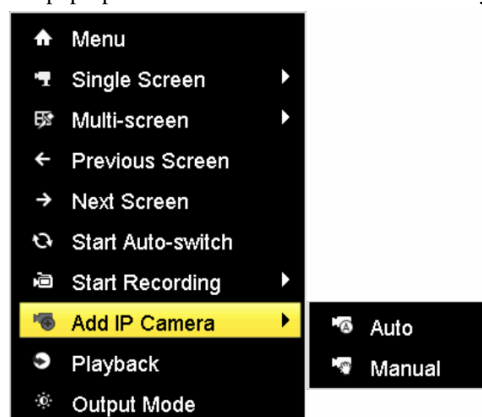


Figure 2.12 Right-click Menu of Adding IP camera

• **Auto**

The device will add the detected IP cameras or encoders automatically by the default user name and password of administrator.

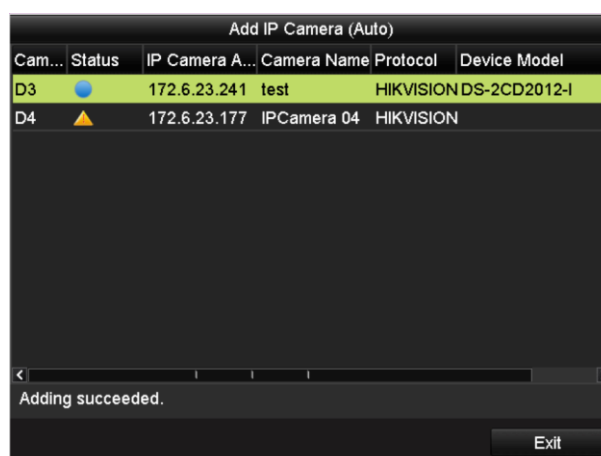


Figure 2.13 Auto Adding IP camera Interface



If the user name and password is changed, the auto adding of IP camera will fail, you may add it manually.

- **Manual**

1) To add the online cameras in same network segment

i. The detected online camera will be listed in the camera list, as shown in the figure below.



Figure 2.14 Manual Adding IP Camera Interface



- The added IP cameras are marked in the white color, while the ones have not been added are marked in yellow.
- For the DS-7100NI-SL/W series NVR, the wirelessly detected or added IP cameras will be displayed in the list as well. For the details of configuring WLAN and WIFI, please refer to *Chapter 9.1 Configuring General Settings* and *9.2.2 Configuring WIFI*.

ii. Click the button to add the camera.

Table 2.1 Explanation of the icons:

Icon	Explanation	Icon	Explanation
	Edit basic parameters of the camera		Add the detected IP camera.
	The camera is connected; you can click the icon to get the live view of the camera.		The camera is disconnected; you can click the icon to get the exception information of camera.
	The camera is connected.		Advanced settings of the camera.
	Delete the IP camera		

2) To add other IP cameras:

i. Click the **Custom Add** button to pop up the Add IP Camera (Custom) interface.

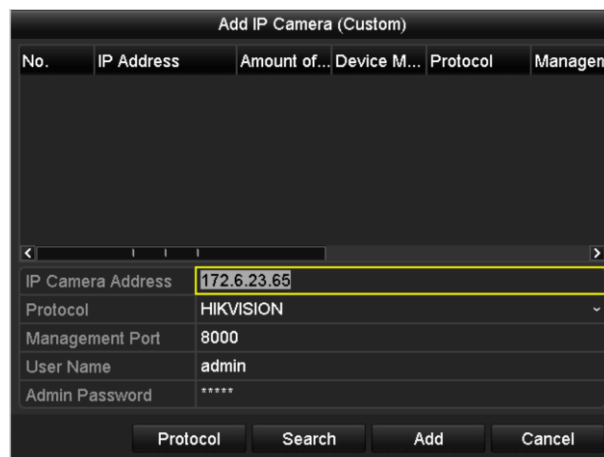


Figure 2. 15 Custom Adding IP Camera Interface

- ii. You can edit the IP address, protocol, management port, and other information of the IP camera to be added.
- iii. Click **Add** to add the camera.

● **OPTION 2:**

Steps:

1. Enter the Camera Management interface.

Menu> Camera> Camera

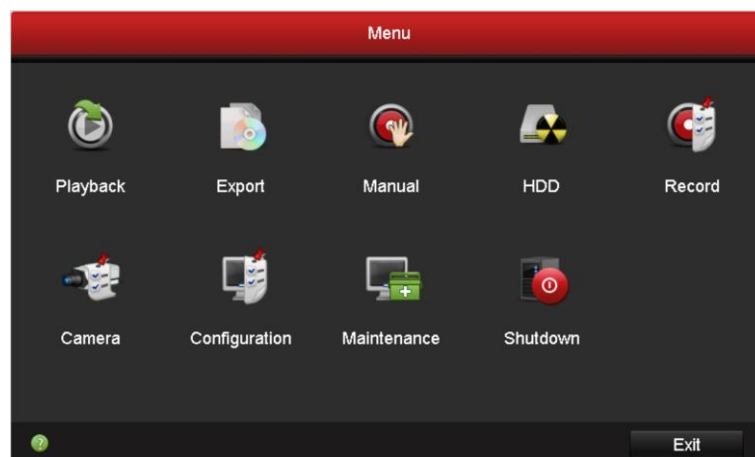



Figure 2. 16 Main Menu

2. Click the  button to add the camera.
3. Repeat the step 2) of manual adding of IP camera to add other IP cameras.

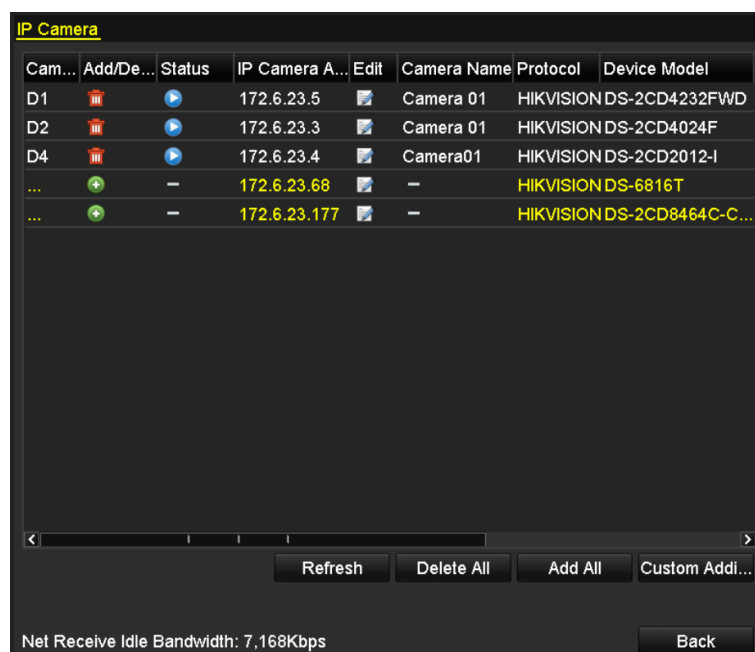


Figure 2.17 IP Camera Management Interface

- (For the encoders with multiple channels only) check the checkbox of Channel No. in the pop-up window, as shown in the following figure, and click **OK** to finish adding.



Figure 2.18 Selecting Multiple Channels

2.3.2 Editing the Connected IP cameras and Configuring Customized Protocols

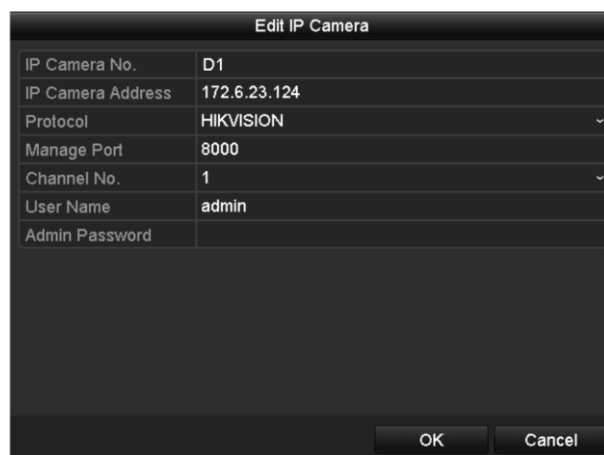
● Editing the Connected IP Camera

Purpose:

After the adding of the IP cameras, the basic information of the camera lists in the page, you can configure the setting of the IP cameras.

Steps:

- Click the icon to edit the parameters; you can edit the IP address, protocol and other parameters.



The 'Edit IP Camera' dialog box contains a table with the following fields and values:

Field	Value
IP Camera No.	D1
IP Camera Address	172.6.23.124
Protocol	HIKVISION
Manage Port	8000
Channel No.	1
User Name	admin
Admin Password	


At the bottom right, there are 'OK' and 'Cancel' buttons.


Figure 2. 19 Edit the Parameters

2. Click **OK** to save the settings and exit the editing interface.

To edit advanced parameters:

Steps:

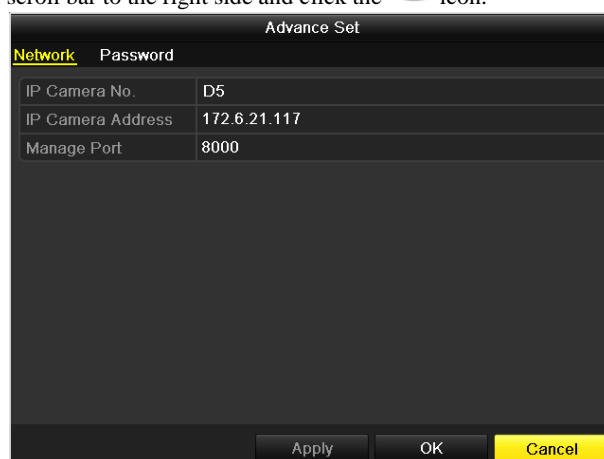1. Drag the horizontal scroll bar to the right side and click the  icon.




The 'Advance Set' dialog box has two tabs: 'Network' (selected) and 'Password'. The 'Network' tab contains a table with the following fields and values:

Field	Value
IP Camera No.	D5
IP Camera Address	172.6.21.117
Manage Port	8000

At the bottom, there are 'Apply', 'OK', and 'Cancel' buttons.

Figure 2. 20 Network Configuration of the Camera

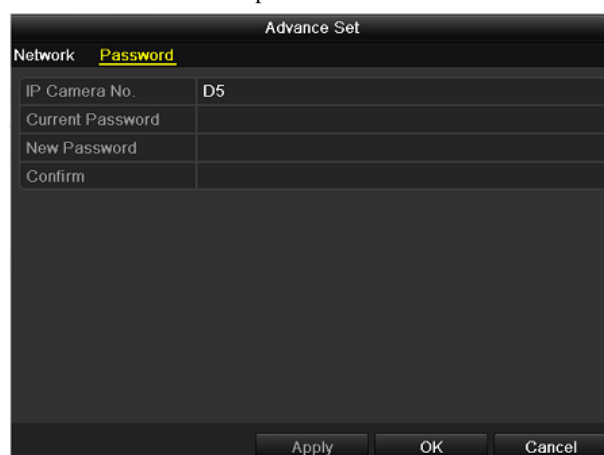2. You can edit the network information and the password of the camera.



The 'Advance Set' dialog box has two tabs: 'Network' and 'Password' (selected). The 'Password' tab contains a table with the following fields and values:

Field	Value
IP Camera No.	D5
Current Password	
New Password	
Confirm	

At the bottom, there are 'Apply', 'OK', and 'Cancel' buttons.

Figure 2. 21 Password Configuration of the Camera

- Click **Apply** to save the settings and click **OK** to exit the interface.

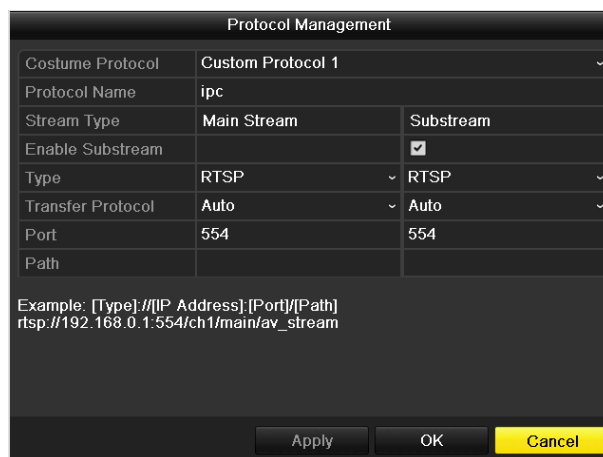
● Configuring the customized protocols

Purpose:

To connect the network cameras which are not configured with the standard protocols, you can configure the customized protocols for them.

Steps:

- Click the **Protocol** button in the custom adding IP camera interface to enter the protocol management interface.



The Protocol Management interface is a window titled "Protocol Management". It contains a table with the following fields:

Costume Protocol	Custom Protocol 1	
Protocol Name	ipc	
Stream Type	Main Stream	Substream
Enable Substream	<input checked="" type="checkbox"/>	
Type	RTSP	RTSP
Transfer Protocol	Auto	Auto
Port	554	554
Path		

Below the table, there is an example URL: `Example: [Type]://[IP Address]:[Port]/[Path]
rtsp://192.168.0.1:554/ch1/main/av_stream`

At the bottom, there are three buttons: **Apply**, **OK**, and **Cancel**.


Figure 2. 22 Protocol Management Interface

There are 16 customized protocols provided in the system, you can edit the protocol name; and choose whether to enable the sub-stream.

- Choose the protocol type of transmission and choose the transfer protocols.



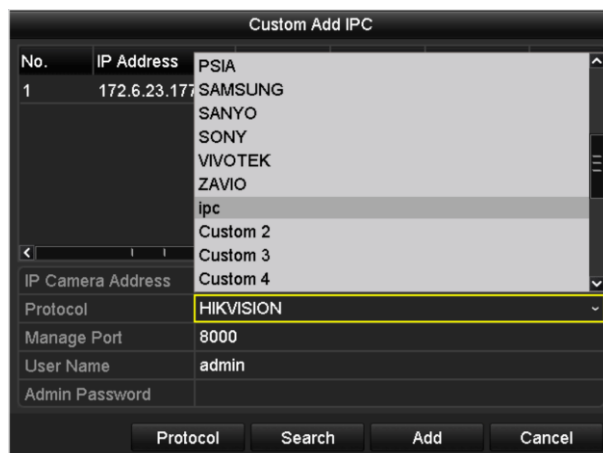The protocol type and the transfer protocols must be supported by the connected network camera. After adding the customized protocols, you can see the protocol name is listed in the dropdown list, please refer to Figure 2. 23.



The Custom Add IPC interface is a window titled "Custom Add IPC". It contains a table with the following fields:

No.	IP Address	Protocol
1	172.6.23.177	PSIA
		SAMSUNG
		SANYO
		SONY
		VIVOTEK
		ZAVIO
		ipc
		Custom 2
		Custom 3
		Custom 4

Below the table, there are four input fields:

- IP Camera Address
- Protocol (dropdown menu, currently showing HIKVISION)
- Manage Port (8000)
- User Name (admin)
- Admin Password

At the bottom, there are four buttons: **Protocol**, **Search**, **Add**, and **Cancel**.

Figure 2. 23 Protocol Setting

- Choose the protocols you just added to validate the connection of the network camera.

2.3.3 Editing IP Cameras Connected to the PoE Interfaces



This chapter is only applicable to the DS-7600NI-SN/P and DS-7100NI-SN/P series NVR.

The PoE interfaces enables the NVR system to pass electrical power safely, along with data, on Ethernet cabling to the connected network cameras.

The DS-7600NI-SN/P and DS-7100NI-SN/P series NVR provide up to 8 PoE interfaces which can connect to 8 network cameras directly; and if you disable the PoE interface, you can also connect to the online network cameras. And the PoE interface supports the Plug-and-Play function.

Example:

As for 7604NI-SN/P NVR, when you want to connect 1 online camera and connect 3 network cameras via PoE interfaces, you must disable 1 PoE interface in the **Edit IP camera** panel.

To add cameras for NVR supporting PoE function:

Before you start:

Connect the network cameras via the PoE interfaces.

Steps:

1. Enter the Camera Management interface.

Menu> Camera> Camera

You can see the connected cameras are listed.

Cam...	Add/De...	Status	IP Camera A...	Edit	Camera Name	Protocol	Device Model
D1	—	▲	192.168.254.2		IPCamera 01	HIKVISION	
D2	—	▲	192.168.254.3		IPCamera 02	HIKVISION	
D3	—	▲	192.168.254.4		IPCamera 03	HIKVISION	
D4	—	▲	192.168.254.5		IPCamera 04	HIKVISION	
D5	—	▲	192.168.254.6		IPCamera 05	HIKVISION	
D6	—	▲	192.168.254.7		IPCamera 06	HIKVISION	
D7	—	▲	192.168.254.8		IPCamera 07	HIKVISION	
D8	—	▲	192.168.254.9		IPCamera 08	HIKVISION	

Figure 2. 24 Camera List



The cameras connecting to the PoE interface cannot be deleted in this menu.

2. Click the button, and select the Adding Method in the drop-down list.
 - **Plug-and-Play:** It means that the camera is connected to the PoE interface, so in this case, the parameters of the camera can't be edited. The IP address of the camera can only be edited in the Network Configuration interface, see *Chapter 9.1 Configuring General Settings* for detailed information.

Edit IP Camera	
IP Camera No.	D1
Adding Method	Plug-and-Play
IP Camera Address	192.168.254.2
Protocol	HIKVISION
Manage Port	8000
Channel No.	1
User Name	admin
Admin Password	

Apply OK Cancel

Figure 2. 25 Edit IP Camera Interface - Plug-and-Play

- **Manual:** You can disable the PoE interface by selecting the manual while the current channel can be used as a normal channel and the parameters can also be edited.

Edit IP Camera	
IP Camera No.	D1
Adding Method	Manual
IP Camera Address	172.6.23.100
Protocol	HIKVISION
Manage Port	8000
Channel No.	1
User Name	admin
Admin Password	*****

Apply OK Cancel

Figure 2. 26 Edit IP Camera Interface - Manual

3. Click the **Apply** button to finish adding.

2.3.4 Editing IP Cameras Connected to the Built-in Switch Network Interfaces



This chapter is only applicable to the DS-7600NI-SN/N and DS-7100NI-SN/N series NVR. For DS-7600NI-SN/N and DS-7100NI-SN/N series NVR, the extra network interfaces provide a built-in switch with plug-and-play function.

Example:

As for DS-7608NI-SN/N NVR, when you want to connect 2 online cameras and connect 6 network cameras via built-in switch interfaces, you must disable 2 built-in switch interfaces in the **Edit IP camera** panel.

To add cameras for NVR via built-in switch interfaces:

Before you start:

Connect the network cameras via the built-in switch interfaces.

Steps:

1. Enter the Camera Management interface.

Menu> Camera> Camera

You can see the connected cameras are listed.

Cam...	Add/De...	Status	IP Camera A...	Edit	Camera Name	Protocol	Device Model
D1	—	▲	192.168.254.2		IPCamera 01	HIKVISION	
D2	—	▲	192.168.254.3		IPCamera 02	HIKVISION	
D3	—	▲	192.168.254.4		IPCamera 03	HIKVISION	
D4	—	▲	192.168.254.5		IPCamera 04	HIKVISION	
D5	—	▲	192.168.254.6		IPCamera 05	HIKVISION	
D6	—	▲	192.168.254.7		IPCamera 06	HIKVISION	
D7	—	▲	192.168.254.8		IPCamera 07	HIKVISION	
D8	—	▲	192.168.254.9		IPCamera 08	HIKVISION	

Figure 2. 27 Camera List



The cameras connecting to the built-in switch interface cannot be deleted in this menu.

2. Click the button, and select the Adding Method in the drop-down list.
 - **Plug-and-Play:** It means that the camera is connected to the built-in switch interface, so in this case, the parameters of the camera can't be edited. The IP address of the camera can only be edited in the Network Configuration interface, see *Chapter 9.1 Configuring General Settings* for detailed information.

Edit IP Camera	
IP Camera No.	D1
Adding Method	Plug-and-Play
IP Camera Address	192.168.254.2
Protocol	HIKVISION
Manage Port	8000
Channel No.	1
User Name	admin
Admin Password	
<div> <input type="button" value="Apply"/> <input type="button" value="OK"/> <input type="button" value="Cancel"/> </div>	

Figure 2. 28 Edit IP Camera Interface - Plug-and-Play

- **Manual:** You can disable the built-in switch interface by selecting the manual while the current channel can be used as a normal channel and the parameters can also be edited.



The screenshot displays a configuration window titled "Edit IP Camera". It contains a table with the following fields and values:

Field	Value
IP Camera No.	D1
Adding Method	Manual
IP Camera Address	172.6.23.100
Protocol	HIKVISION
Manage Port	8000
Channel No.	1
User Name	admin
Admin Password	*****

At the bottom of the window, there are three buttons: "Apply", "OK", and "Cancel". The "Admin Password" field is highlighted with a yellow border.

Figure 2. 29 Edit IP Camera Interface - Manual

3. Click the **Apply** button to finish adding.

Chapter 3 Live View




3.1 Introduction of Live View

Live view shows you the video image getting from each camera in real time. The NVR automatically enters Live View mode when powered on.

Live View Icons

In the live view mode, there are icons at the right top of the screen for each channel, showing the status of the record and alarm in the channel, so that you can know whether the channel is recorded, or whether there are alarms occur as soon as possible.

Table 3. 1 Description of Live View Icons

Icons	Description
	Alarm (video loss, tampering, motion detection or sensor alarm)
	Record (manual record, continuous record, motion detection or alarm triggered record)
	Alarm & Record

3.2 Operations in Live View Mode

In live view mode, there are many functions provided. The functions are listed below.

- **Single Screen:** showing only one screen on the monitor.
- **Multi-screen:** showing multiple screens on the monitor simultaneously.
- **Auto-switch:** the screen is auto switched to the next one. And you must set the dwell time for each screen on the configuration menu before enabling the auto-switch.

Menu>Configuration>Live View>General.

- **Start Recording:** continuous record and motion detection record are supported.
- **Add IP Camera:** the shortcut to add IP camera, manual and auto are selectable.
- **Output Mode:** select the output mode to Standard, Bright, Gentle or Vivid.
- **Playback:** playback the recorded videos for current day.

3.2.1 Using the Mouse in Live View

Table 3. 2 Mouse Operation in Live View

Name	Description
Menu	Enter the main menu of the system by right clicking the mouse.
Single Screen	Switch to the single full screen by choosing channel number from the dropdown list.
Multi-screen	Adjust the screen layout by choosing from the dropdown list.
Previous Screen	Switch to the previous screen.
Next Screen	Switch to the next screen.
Start/Stop Auto-switch	Enable/disable the auto-switch of the screens.
Start Recording	Start continuous recording or motion detection recording of all channels.
Add IP Camera	Add IP camera, manual mode and auto mode are selectable.
Playback	Enter the playback interface and start playing back the video of the selected channel immediately.
Output Mode	Four modes of output supported, including Standard, Bright, Gentle and Vivid.



The *dwell time* of the live view configuration must be set before using **Start Auto-switch**.

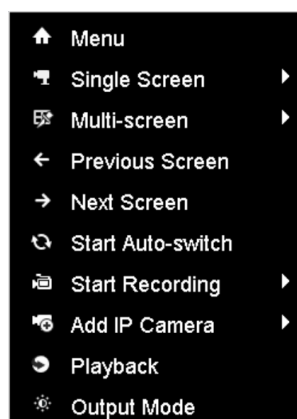


Figure 3. 1 Right-click Menu

3.2.2 Quick Setting Toolbar in Live View Mode

On the screen of each channel, there is a quick setting toolbar which shows when you single click the mouse in the corresponding screen.



Figure 3. 2 Quick Setting Toolbar

Table 3. 3 Description of Quick Setting Toolbar Icons

Icons	Description	Icons	Description	Icons	Description
	Enable/Disable Manual Record		Instant Playback		Mute/Audio on
	PTZ Control		Digital Zoom		Image Settings
	Live View Strategy		Close		



Instant Playback only shows the record in last five minutes. If no record is found, it means there is no record during the last five minutes.



Digital Zoom can zoom in the selected area to the full screen. You can click and draw to select the area to zoom in, as shown in Figure 3. 3.



Figure 3.3 Digital Zoom



Image Settings icon can be selected to enter the Image Settings menu.

You can set the image parameters like brightness, contrast, saturation and hue.



Figure 3.4 Image Settings- Customize



Live View Strategy can be selected to set strategy, including Real-time, Balanced, Fluency.

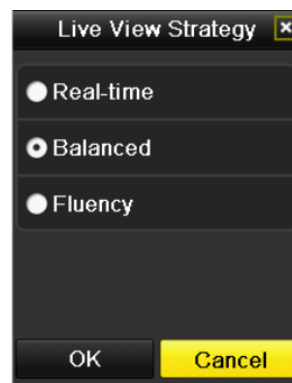


Figure 3.5 Live View Strategy

3.3 Adjusting Live View Settings

Purpose:

Live View settings can be customized according to different needs. You can configure the output interface, dwell time for screen to be shown, mute or turning on the audio, the screen number for each channel, etc.

Steps:

1. Enter the Live View Settings interface.

Menu> Configuration> Live View

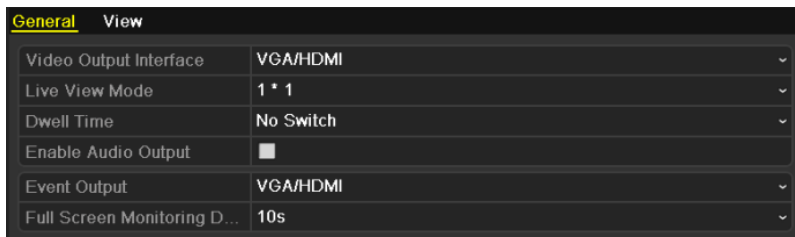


Figure 3. 6 Live View-General

The settings available in this menu include:

- **Video Output Interface:** Designates the output to configure the settings for. Only VGA/HDMI is selectable by default.
- **Live View Mode:** Designates the display mode to be used for Live View.
- **Dwell Time:** The time in seconds to *dwell* between switching of channels when enabling auto-switch in Live View.
- **Enable Audio Output:** Enables/disables audio output for the selected video output.
- **Event Output:** Designates the output to show event video.
- **Full Screen Monitoring Dwell Time:** The time in seconds to show alarm event screen.

- ## 2. Setting Cameras Order

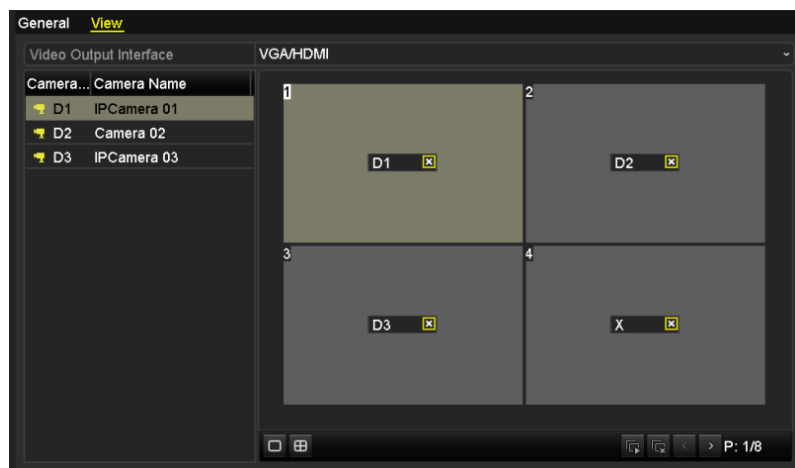





Figure 3.7 Live View- Camera Order

To set the camera order:

- 1) Select a **View** mode in 
- 2) Select the small window, and double-click on the channel number to display the channel on the

window.

You can click  button to start live view for all the channels and click  to stop all the live view.

- 3) Click the **Apply** button to save the setting.

3.4 User Logout

Purpose:

After logging out, the monitor turns to the live view mode and if you want to do some operation, you need to enter user name and password to log in again.

Steps:

1. Enter the Shutdown menu.

Menu>Shutdown

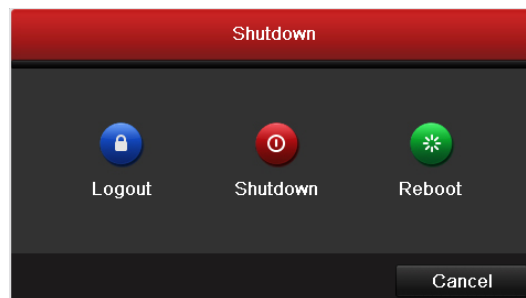


Figure 3.8 Shutdown

2. Click **Logout**.



After you have logged out the system, menu operation on the screen is invalid. It is required to input a user name and password to unlock the system.

Chapter 4 PTZ Controls

4.1 Setting PTZ Presets, Patrols & Patterns

Before you start:

Please make sure that the presets, patrols and patterns should be supported by PTZ protocols.

4.1.1 Customizing Presets

Purpose:

Follow the steps to set the Preset location which you want the PTZ camera to point to when an event takes place.

Steps:

1. Enter the PTZ Control interface.

Menu>Camera>PTZ



Figure 4. 1 PTZ- More Settings

2. Use the directional button to wheel the camera to the location where you want to set preset.
3. Click the round icon before **Save Preset**.
4. Click the preset number to save the preset.

Repeat the steps 2-4 to save more presets. If the number of the presets you want to save is greater than 17, click [...] and choose the available numbers.

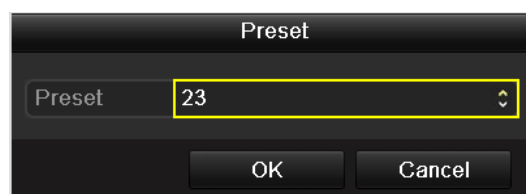


Figure 4. 2 More Presets

4.1.2 Calling Presets

Purpose:

This feature enables the camera to point to a specified position such as a window when an event takes place.

Call preset in the PTZ setting interface:

Steps:

1. Enter the PTZ Control interface.
Menu>Camera>PTZ
2. Check the round icon of **Call Preset**.

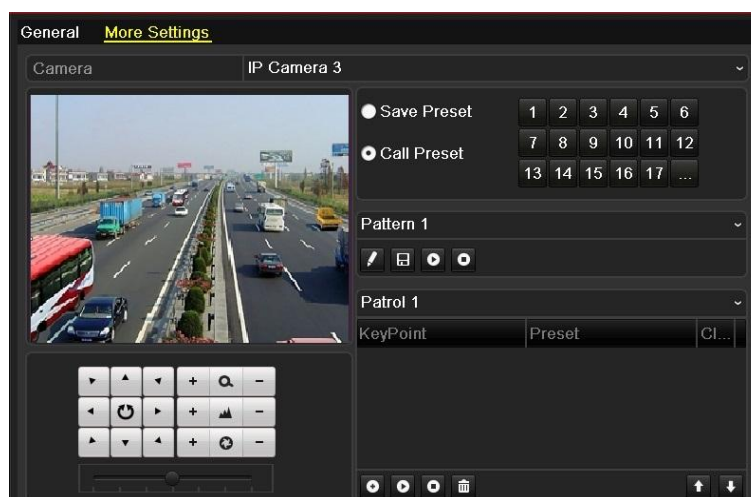



Figure 4. 3 PTZ- Call Preset

3. Choose the preset number.

Call preset in live view mode:

Steps:

1. Press the PTZ button on the front panel or click the PTZ Control icon  in the quick setting bar to enter the PTZ setting menu in live view mode.

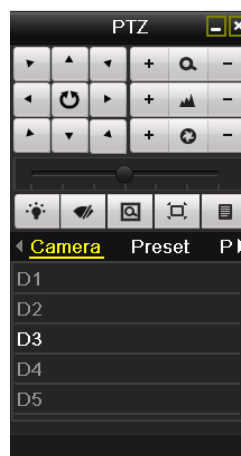


Figure 4. 4 PTZ Toolbar

2. Choose **Camera** in the list on the menu.
3. Double click the preset in the **Preset** list to call it.

4.1.3 Customizing Patrols

Purpose:

Patrols can be set to move the PTZ to different key points and have it stay there for a set duration before moving on to the next key point. The key points are corresponding to the presets. The presets can be set following the steps above in *Customizing Presets*.

Steps:


1. Enter the PTZ Control interface.
Menu>Camera>PTZ
2. Select patrol number in the drop-down list of patrol.
3. Select the  under Patrol option box to add key points for the patrol.



Figure 4. 5 PTZ- Add Key Point

4. Configure key point parameters, such as the key point No., duration of staying for one key point and speed of patrol. The key point is corresponding to the preset. The **Key Point No.** determines the order at which the PTZ will follow while cycling through the patrol. The **Duration** refers to the time span to stay at the corresponding key point. The **Speed** defines the speed at which the PTZ will move from one key point to the next.






Figure 4. 6 Key Point Configuration

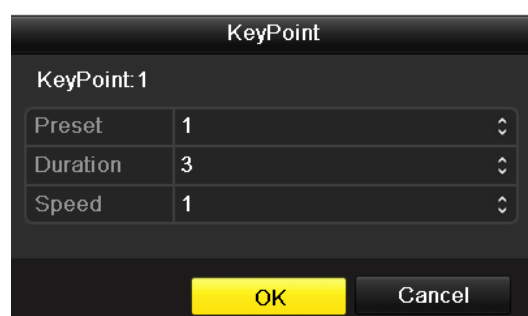5. Click **OK** to save the key point to the patrol.
Repeat the above steps to add more key points.
Click the  icon to delete the corresponding key point, and click the trash icon  to delete all the key points.

Select a key point, then click  or  button to adjust the order of the key points.

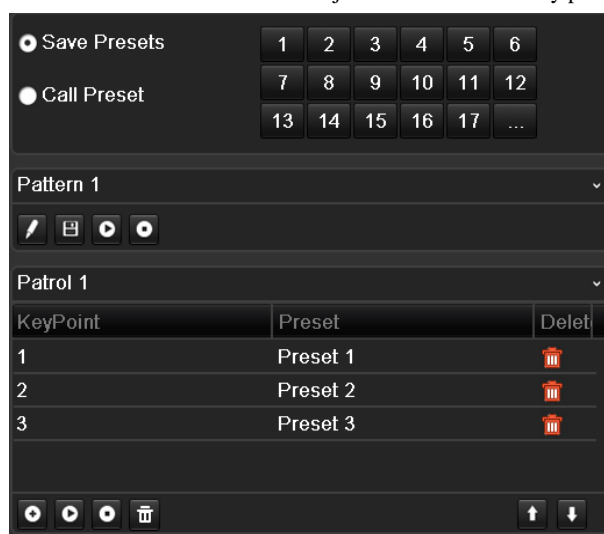


Figure 4. 7 Key Points Deletion



4.1.4 Calling Patrols

Purpose:

Calling a patrol makes the PTZ to move according the predefined patrol path.

Calling patrol in the PTZ setting interface:

Steps:

1. In the PTZ setting interface.
Menu> Camera> PTZ> More Settings
2. Select the patrol number, and then click  to call the patrol.
3. Click  to stop it.

Calling patrol in live view mode:

Steps:



1. Press PTZ control on the front panel or on the remote, or click PTZ Control icon  on the quick setting toolbar, to show the PTZ control toolbar.
2. Choose **Patrol** on the control bar.
3. Double click the patrol or select the patrol and click  to call it.



Figure 4. 8 PTZ Toolbar- Patrol

4.1.5 Customizing Patterns

Purpose:



Patterns can be set by recording the movement of the PTZ. You can call the pattern to make the PTZ movement according to the predefined path.

Steps:

1. Enter the PTZ Control interface.
Menu>Camera>PTZ>More Settings
2. Choose pattern number in the option box.



Figure 4. 9 PTZ- Pattern

3. Click  and use your mouse to drag the image or click the eight directional buttons in the control box under the image to move the PTZ camera.
The movement of the PTZ is recorded as the pattern.
4. Click  to save the pattern.



4.1.6 Calling Patterns

Purpose:

Follow the procedure to move the PTZ camera according to the predefined patterns.

Calling pattern in the PTZ setting interface

Steps:

1. Enter the PTZ Control interface.
Menu>Camera>PTZ>More Settings
2. Select the pattern number.
3. Click , then the PTZ moves according to the pattern. Click  to stop it.

Call pattern in live view mode

Steps:




1. In the live view mode, press PTZ control on the front panel or on the remote control, or click PTZ Control icon  on the quick setting toolbar.
2. And then choose **Pattern** on the control bar.
3. Double click the pattern or select the pattern and click  to call it.



Figure 4. 10 PTZ Toolbar- Pattern

4.2 PTZ Control Toolbar

In the Live View mode, you can press the PTZ Control button on the front panel or on the remote control, or choose the PTZ Control icon  to enter the PTZ toolbar.








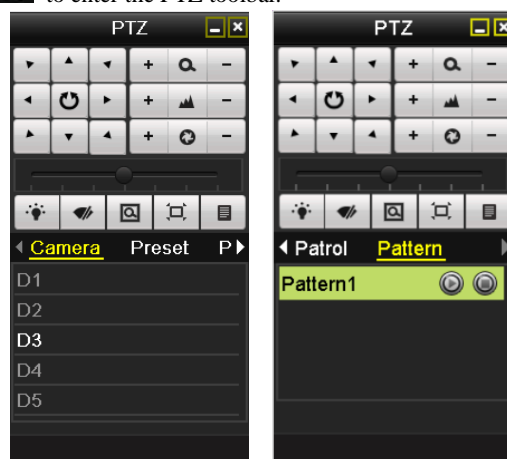













Figure 4.11 PTZ Toolbar

Table 4.1 Description of the PTZ toolbar icons

Icon	Description	Icon	Description	Icon	Description
	Direction button and the auto-cycle button		Zoom+, Focus+, Iris+		Zoom-, Focus-, Iris-
	The speed of the PTZ movement		Light on/off		Wiper on/off
	3D-Zoom		Image Centralization		Preset
	Patrol		Pattern		Menu
	Previous item		Next item		Start pattern/patrol
	Stop the patrol or pattern movement		Minimize windows		Exit

Chapter 5 Record Settings

5.1 Configuring Recording Parameters

Purpose:

By configuring the recording parameters you can define the parameters which affect the image quality, such as the transmission stream type, the resolution and so on.

Before you start:

Make sure that the HDD has already been installed. If not, please install a HDD and initialize it. (Menu>HDD>General)

L...	Capacity	Status	Property	Type	Free Space	Gr...	Edit	D...
1	931.51GB	Normal	R/W	Local	919GB	1	-	-

Figure 5.1 HDD- General

Steps:

1. Enter the Record settings interface to configure the recording parameters:

Menu>Record> Parameters

Camera	IP Camera 1	
Encoding Parameters	Main Stream(Continuous)	Main Stream(Event)
Stream Type	Video & Audio	Video & Audio
Resolution	704*576(4CIF)	704*576(4CIF)
Bitrate Type	Variable	Variable
Video Quality	Medium	Medium
Frame Rate	Full Frame	Full Frame
Max. Bitrate Mode	General	General
Max. Bitrate(Kbps)	2048	2048
Max. Bitrate Range Reco...	1152~1920(Kbps)	1152~1920(Kbps)
Pre-record	5s	
Post-record	5s	
Expired Time (day)	0	
Record Audio	<input checked="" type="checkbox"/>	

Figure 5.2 Recording Parameters

2. Parameters Setting for Recording

- 1) Select **Record** tab page to configure. You can configure the stream type, the resolution, and other parameters on your demand.
 - **Pre-record:** The time you set to record before the scheduled time or event. For example, when an alarm triggered the recording at 10:00, if you set the pre-record time as 5 seconds, the camera records it at 9:59:55.
 - **Post-record:** The time you set to record after the event or the scheduled time. For example, when an alarm triggered the recording ends at 11:00, if you set the post-record time as 5 seconds, it records till 11:00:05.
 - **Expired Time:** The expired time is the longest time for a record file to be kept in the HDD, if the deadline is reached, the file will be deleted. You can set the expired time to 0, and then the file will not be deleted. The actual keeping time for the file should be determined by the capacity of the HDD.
 - **Record Audio:** Check the checkbox to enable or disable audio recording.

- 2) Click **Apply** to save the settings.



The parameters of Main Stream (Event) are read-only.

3. Parameters Settings for Sub-stream

- 1) Enter the Sub-stream tab page.

Camera	IP Camera 3	▼
Stream Type	Video & Audio	▼
Resolution	352*288(CIF)	▼
Bitrate Type	Variable	▼
Video Quality	Medium	▼
Frame Rate	25fps	▼
Max. Bitrate Mode	General	▼
Max. Bitrate(Kbps)	512	▼
Max. Bitrate Range Reco...	384~640(Kbps)	

Figure 5. 3 Sub-stream Parameters

- 2) Configure the parameters of the camera.
- 3) Click **Apply** to save the settings.

5.2 Configuring Record Schedule

Purpose:

Set the record schedule, and then the camera automatically starts/stops recording according to the configured schedule.

Steps:

1. Enter the Record Schedule interface.

Menu>Record>Schedule

2. Configure Record Schedule

- 1) Select Record Schedule.

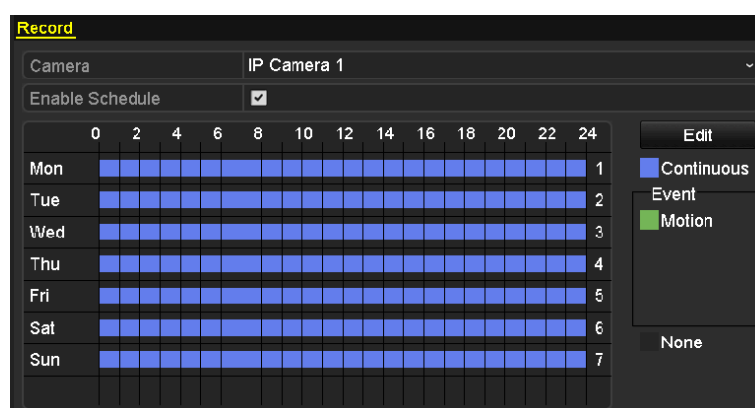


Figure 5.4 Record Schedule

- 2) Choose the camera you want to configure.
- 3) Select the check box after the **Enable Schedule** item.
- 4) Click **Edit** button or click on the color icon under the edit button and draw the schedule line on the panel.

Edit the schedule:

- I. In the message box, you can choose the day to which you want to set schedule.

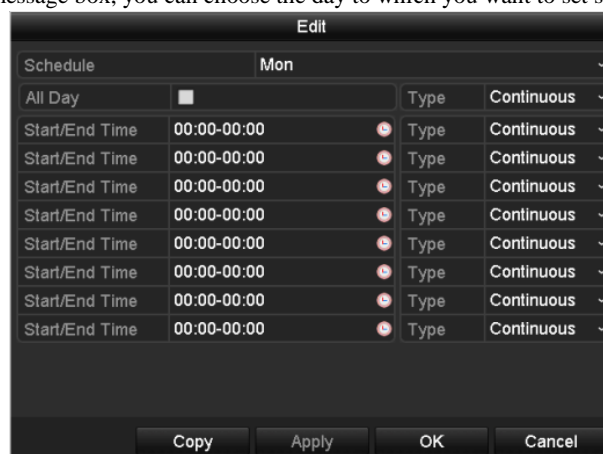



Figure 5.5 Recording Schedule Interface

You can click the  button to set the accurate time of the schedule.

- II. To schedule an all-day recording, check the checkbox after the **All Day** item.



Figure 5.6 Edit Schedule

III. To arrange other schedule, leave the **All Day** checkbox blank and set the Start/End time.



Up to 8 periods can be configured for each day. And the time periods can't be overlapped each other.

Repeat the above edit schedule steps to schedule recording for other days in the week. If the schedule can also be applied to other days, click **Copy**.

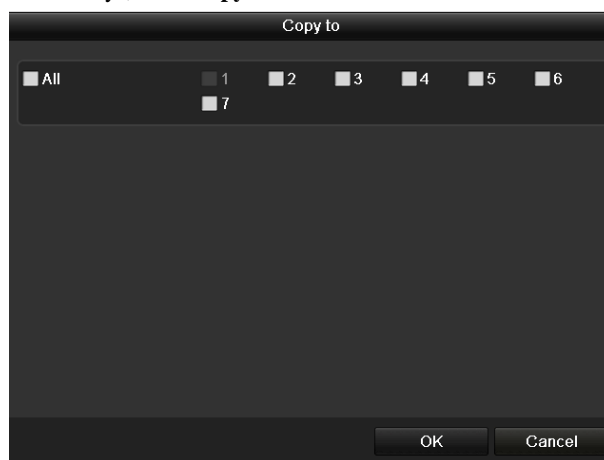


Figure 5.7 Copy Schedule to Other Days

IV. Click **OK** to save setting and back to upper level menu.

V. Click **Apply** in the Record Schedule interface to save the settings.

Draw the schedule:

- 1) Click on the color icons, you can choose the schedule type as continuous or event.



Figure 5.8 Draw the Schedule

Descriptions of the color icons are shown in the figure below.

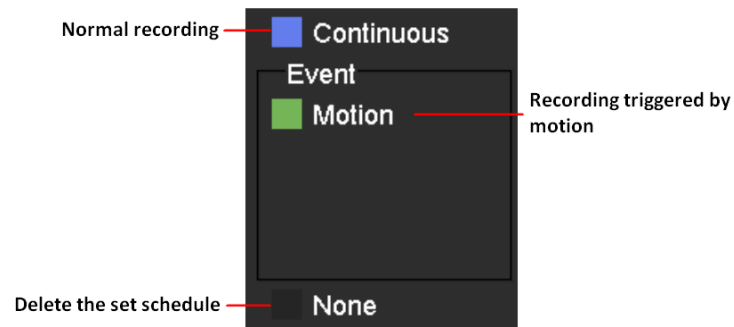


Figure 5.9 Descriptions of the color icons

- 2) Click the **Apply** button to validate the settings.
- 3) (Optional) If the settings can also be used to other channels, click **Copy**, and then choose the channel to which you want to copy.

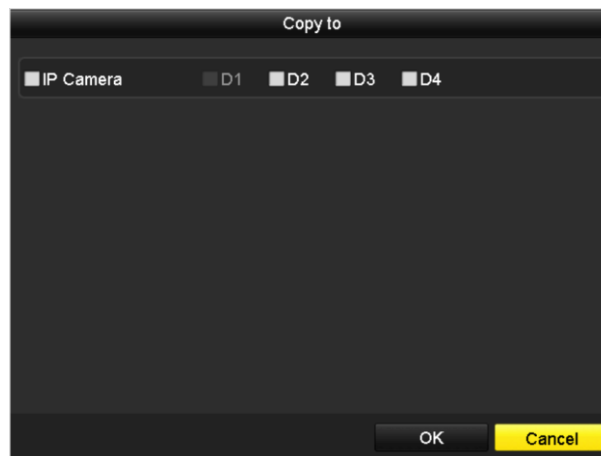


Figure 5.10 Copy Schedule to Other Channels

5.3 Configuring Motion Detection Record

Purpose:

Follow the steps to set the motion detection parameters. In the live view mode, once a motion detection event takes place, the NVR can analyze it and do many actions to handle it. Enabling motion detection function can trigger certain channels to start recording, or trigger full screen monitoring, audio warning, notify the surveillance center and so on. In this chapter, you can follow the steps to schedule a record which triggered by the detected motion.

Steps:

1. Enter the Motion Detection interface.

Menu>Camera>Motion

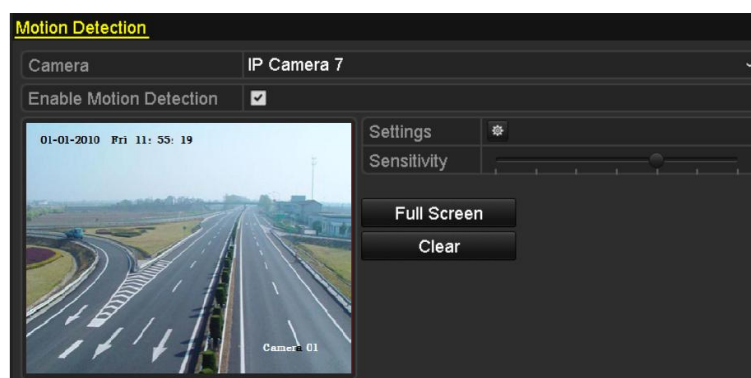


Figure 5.11 Motion Detection

2. Configure Motion Detection:

- 1) Choose camera you want to configure.
- 2) Check the checkbox after **Enable Motion Detection**.
- 3) Drag and draw the area for motion detection by mouse. If you want to set the motion detection for all the area shot by the camera, click **Full Screen**. To clear the motion detection area, click **Clear**.

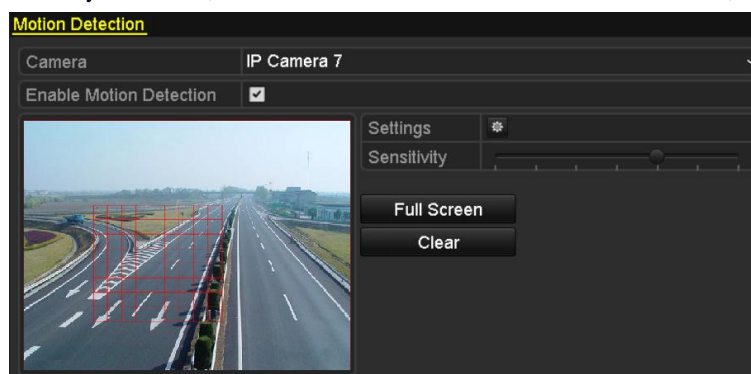


Figure 5.12 Motion Detection- Mask

- 4) Click **Setting**, and the message box for channel information pop up.

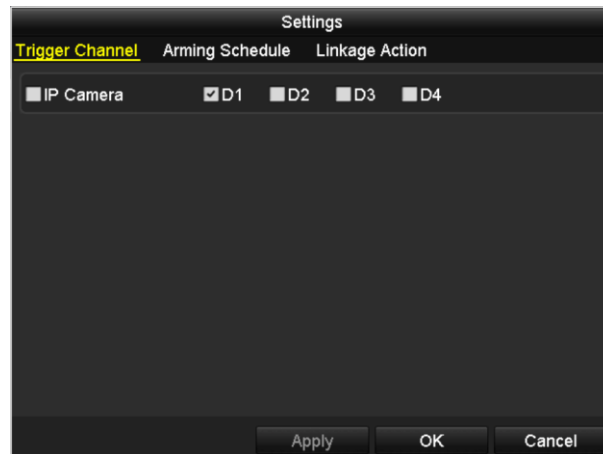


Figure 5. 13 Motion Detection Setting

-
- 5) Select the channels which you want the motion detection event to trigger recording.
 - 6) Click **Apply** to save the settings.
 - 7) Click **OK** to back to the upper level menu.
 - 8) Exit the Motion Detection menu.
3. Edit the Motion Detection Record Schedule. For the detailed information of schedule configuration, see *Chapter Configuring Record Schedule*.

5.4 Manual Record

Purpose:

Follow the steps to set parameters for the manual record. The manual recording is prior to the scheduled recording.

Steps:

1. Enter the Manual settings interface.

Menu> Manual

Or press the **REC** button on the remote control.

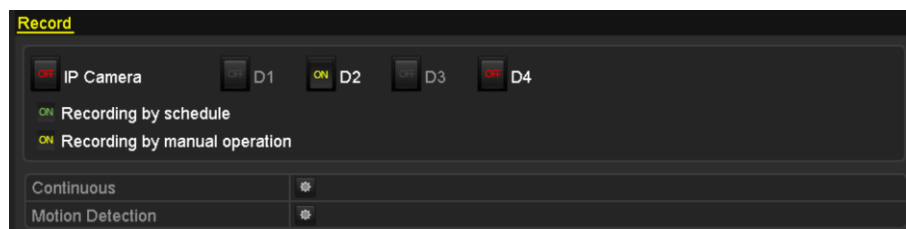


Figure 5. 14 Manual Record

2. Enabling Manual Record

- 1) Select **Record** on the left bar.
- 2) Click the status button before camera number to change **OFF** to **ON**.

3. Disable manual record.

Click the status button to change **ON** to **OFF**.



Green icon **ON** means that the channel is configured the record schedule. After rebooting all the manual records enabled are canceled.

5.5 Configuring Holiday Record

Purpose:

Follow the steps to configure the record schedule on holiday for that year. You may want to have different plan for recording on holiday.

Steps:

1. Enter the Record setting interface.

Menu>Record> Holiday



Figure 5. 15 Holiday Settings

2. Enable Edit Holiday schedule.

- 1) Click to enter the Edit interface.

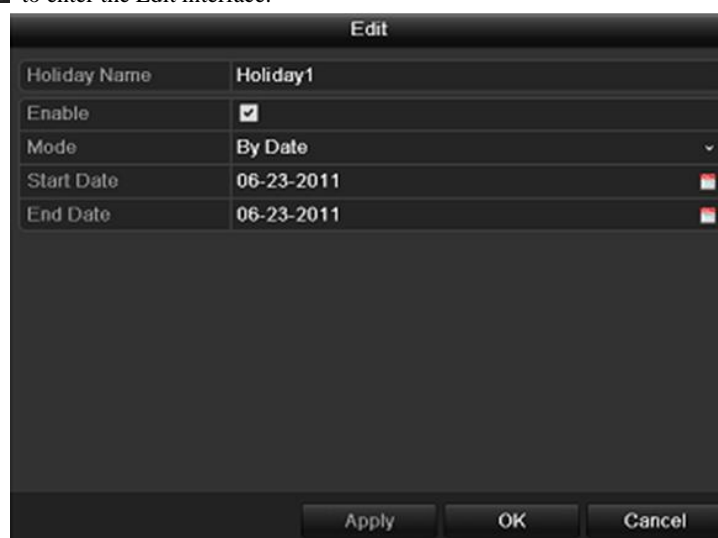


Figure 5. 16 Edit Holiday Settings

- 2) Check the checkbox after **Enable Holiday**.

- 3) Select Mode from the dropdown list.

There are three different modes for the date format to configure holiday schedule.

- 4) Set the start and end date.
 - 5) Click **Apply** to save settings.
 - 6) Click **OK** to exit the Edit interface.
3. Enter Record Schedule settings interface to edit the holiday recording schedule. See *Chapter 5.2 Configuring Record Schedule*.

5.6 Files Protection

Purpose:

You can lock the recorded files or set the HDD property to Read-only to protect the record files from being overwritten.

Steps:

1. Enter Export setting interface.

Menu> Export

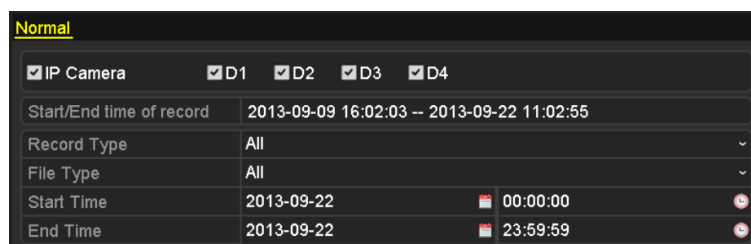


Figure 5. 17 Playback

2. Select the channels you want to investigate by checking the checkbox to ☒.
3. Configure the record type, file type start/end time.
4. Click **Search** to show the results.






Figure 5. 18 Playback- Search Result

5. Protect the record files.

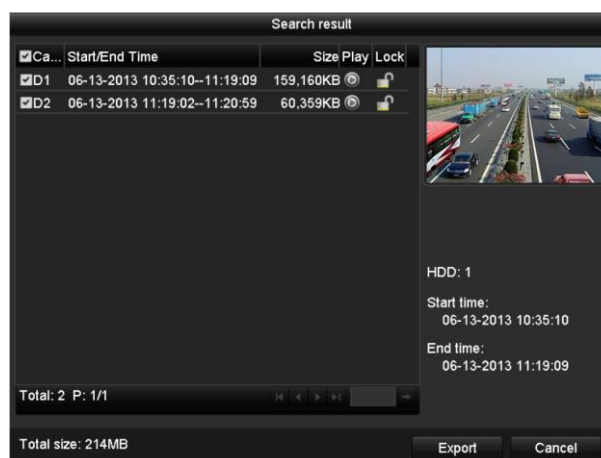- 1) Find the record files you want to protect, and then click the  icon which will turn to , indicating that the file is locked.



The record files of which the recording is still not completed cannot be locked.



- 2) Click  to change it to  to unlock the file and the file is not protected.



Figure 5. 19 Unlocking Attention

Chapter 6 Playback

6.1 Playing Back Record Files


6.1.1 Playing Back by Channel

Purpose:

Play back the recorded video files of a specific channel in the live view mode. Channel switch is supported.

Instant playback by channel

Steps:

Choose a channel in live view mode using the mouse and click the  button in the quick setting toolbar.



In the instant playback mode, only record files recorded during the last five minutes on this channel will be played back.



Figure 6. 1 Instant Playback Interface

Playback by channel

1. Enter the Playback interface.

Right click a channel in live view mode and select Playback from the menu, as shown in Figure 6. 2.

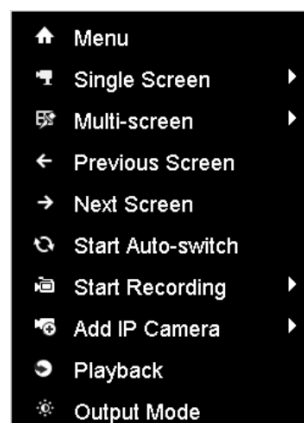


Figure 6. 2 Right-click Menu under Live View

Under multi-screen live view mode, the recorded files of the top-left channel will be played back.



Pressing numerical buttons will switch playback to the corresponding channels during playback process.

2. Playback management.

The toolbar in the bottom part of Playback interface can be used to control playing progress, as shown in Figure 6. 3.



Figure 6. 3 Playback Interface

Click the channel(s) to execute simultaneous playback of multiple channels.



Figure 6. 4 Toolbar of Playback



The 06-08-2013 13:00:57 -- 06-09-2013 14:55:44 indicates the start/end time of the record.

Table 6.1 Detailed Explanation of Playback Toolbar

Button	Operation	Button	Operation	Button	Operation	Button	Operation
	Audio on/ Mute		Start/Stop clipping		30s forward		30s reverse
	Add default tag		Add customized tag		Tag management		Speed down
	Pause reverse play/ Reverse play/ Single-frame reverse play		Pause play/ Play/ Single-frame play		Scaling up/down the time line		Speed up
	Previous day		Next day		Full Screen		Exit
	Stop		Digital Zoom		Video type		Process bar



Playback progress bar: use the mouse to click any point of the progress bar or drag the progress bar to locate special frames.

6.1.2 Playing Back by Time

Purpose:

Play back video files recorded in specified time duration. Multi-channel simultaneous playback and channel switch are supported.

Steps:

1. Enter playback interface.
Menu>Playback
2. Check the checkbox of channel(s) in the channel list and then double-click to select a date on the calendar.



Figure 6.5 Playback Calendar



If there are record files for that camera in that day, in the calendar, the icon for that day is displayed as . Otherwise it is displayed as

In the Playback interface:

The toolbar in the bottom part of Playback interface can be used to control playing process, as shown in Figure 6. 6.



Figure 6. 6 Interface of Playback by Time



Figure 6. 7 Toolbar of Playback by Time



The **06-08-2013 13:00:57 -- 06-09-2013 14:55:44** indicates the start/end time of the record.

Table 6. 2 Detailed Explanation of Playback-by-time Interface

Button	Operation	Button	Operation	Button	Operation	Button	Operation
	Audio on/ Mute		Start/Stop clipping		30s forward		30s reverse
	Add default tag		Add customized tag		Tag management		Speed down
	Pause reverse play/ Reverse play/ Single-frame reverse play		Pause play/ Play/ Single-frame play		Scaling up/down the time line		Speed up
	Previous day		Next day		Full Screen		Exit
	Stop		Digital Zoom		Video type		Process bar



Playback progress bar: use the mouse to click any point of the progress bar or drag the progress bar to locate special frames.

6.1.3 Playing Back by Event Search

Purpose:

Play back record files on one or several channels searched out by restricting event type (e.g. motion detection).

Steps:

1. Enter the Playback interface.
Menu>Playback
2. Select the **Event** in the drop-down list on the top-left side. Only Motion is supported for the event type.

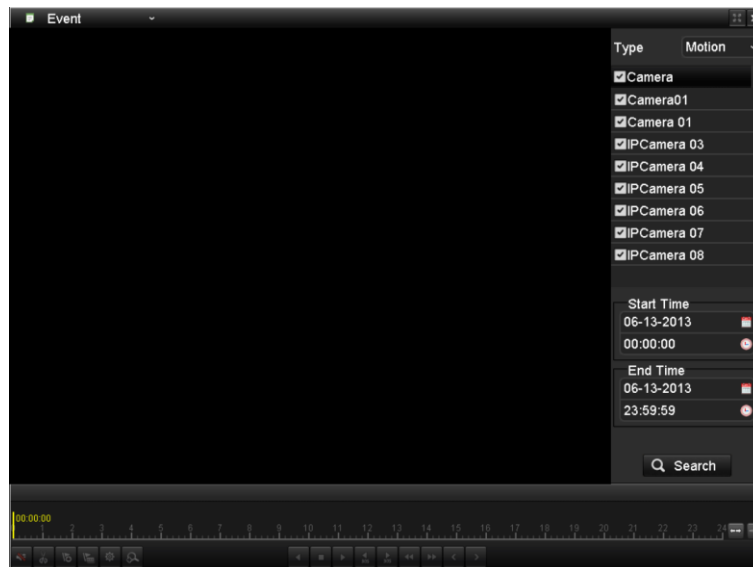


Figure 6. 8 Motion Search Interface

3. Click **Search** button to get the search result information. You may refer to the right-side bar for the result.

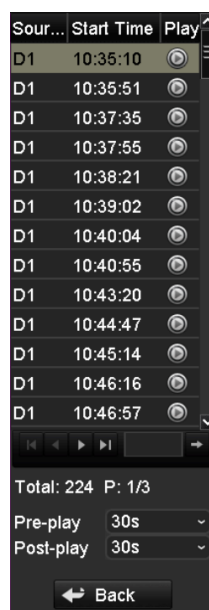



Figure 6. 9 Search Result Bar

4. Click  button to play back the file.
You can click the **Back** button to back to the search interface.



Pre-play and post-play can be configured.

5. Playback interface.

The toolbar in the bottom part of Playback interface can be used to control playing process.



Figure 6.10 Interface of Playback by Event



Figure 6.11 Toolbar of Playback by Event

Table 6.3 Detailed Explanation of Playback-by-event Toolbar

Button	Operation	Button	Operation	Button	Operation	Button	Operation
	Audio on/ Mute		Start/Stop clipping		30s forward		30s reverse
	Add default tag		Add customized tag		Tag management		Speed down
	Pause reverse play/ Reverse play/ Single-frame reverse play		Pause play/ Play/ Single-frame play		Scaling up/down the time line		Speed up
	Previous day		Next day		Full Screen		Exit
	Stop		Digital Zoom		Process bar		Video type



Playback progress bar: use the mouse to click any point of the progress bar or drag the progress bar to locate special frames.

6.1.4 Playing Back by Tag

Purpose:


Video tag allows you to record related information like people and location of a certain time point during playback. You are also allowed to use video tag(s) to search for record files and position time point.


Before playing back by tag:

1. Enter Playback interface.
Menu>Playback
2. Search and play back the record file(s). Refer to *Chapter 6.1.1* for the detailed information about searching and playback of the record files.



Figure 6.12 Interface of Playback by Time

Click  button to add default tag.

Click  button to add customized tag and input tag name.



Max. 64 tags can be added to a single video file.

3. Tag management.


Click  button to check, edit and delete tag(s).



Figure 6.13 Tag Management Interface

Steps:

1. Select the **Tag** from the drop-down list in the Playback interface.
2. Choose channels, edit start time and end time, and then click Search to enter Search Result interface.



You can enter keyword in the textbox to search the tag on your command.



Figure 6.14 Video Search by Tag

3. Click button to play back the file.

You can click the **Back** button to back to the search interface.



Pre-play and post-play can be configured.



Figure 6.15 Interface of Playback by Tag



Figure 6.16 Toolbar of Playback by Tag

Table 6.4 Detailed Explanation of Playback-by-tag Toolbar

Button	Operation	Button	Operation	Button	Operation	Button	Operation
	Audio on/ Mute		Start/Stop clipping		30s forward		30s reverse
	Add default tag		Add customized tag		Tag management		Speed down
	Pause reverse play/ Reverse play/ Single-frame reverse play		Pause play/ Play/ Single-frame play		Scaling up/down the time line		Speed up
	Previous day		Next day		Full Screen		Exit
	Stop		Digital Zoom		Process bar		Video type



Playback progress bar: use the mouse to click any point of the progress bar or drag the progress bar to locate special frames.

6.1.5 Playing Back by System Logs

Purpose:

Play back record file(s) associated with channels after searching system logs.

Steps:

1. Enter Log Information interface.
Menu>Maintenance>Log Information
2. Click **Log Search** tab to enter Playback by System Logs.
Set search time and type and click **Search** button.

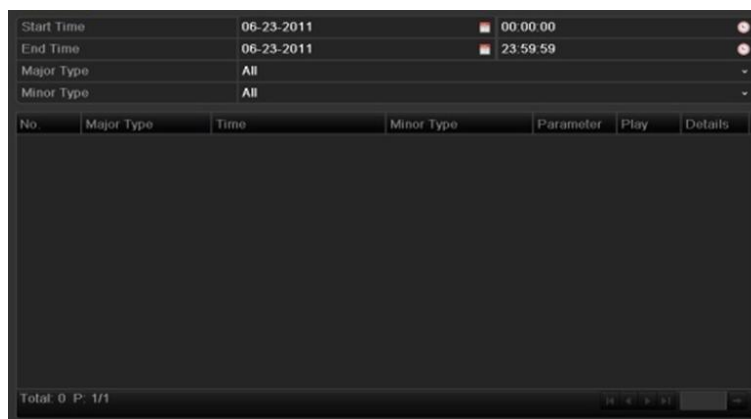


Figure 6.17 System Log Search Interface

3. Choose a log with record file and click  button to enter Playback interface.



If there is no record file at the time point of the log, the message box “No result found” will pop up.

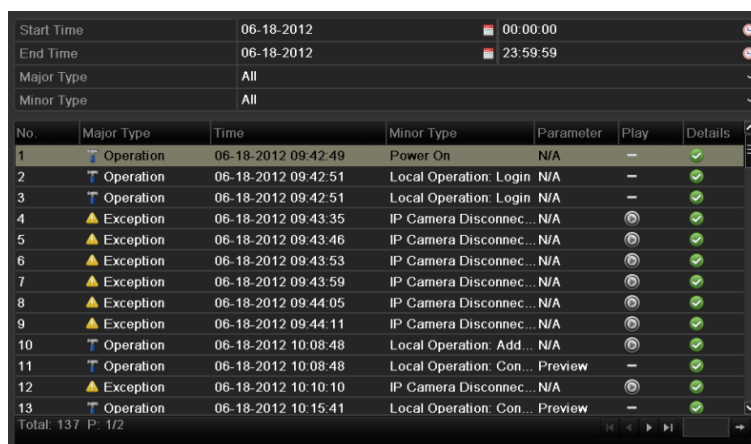


Figure 6.18 Result of System Log Search

4. Playback interface.

The toolbar in the bottom part of Playback interface can be used to control playing process.





Figure 6.19 Interface of Playback by Log

6.1.6 Playing Back External File

Purpose:

Perform the following steps to look up and play back files in the external devices.

Steps:

1. Enter Tag Search interface.
Menu>Playback
2. Select the **External File** in the drop-down list on the top-left side.
The files are listed in the right-side list.
You can click the  Refresh button to refresh the file list.
3. Select and click the  button to play back it.

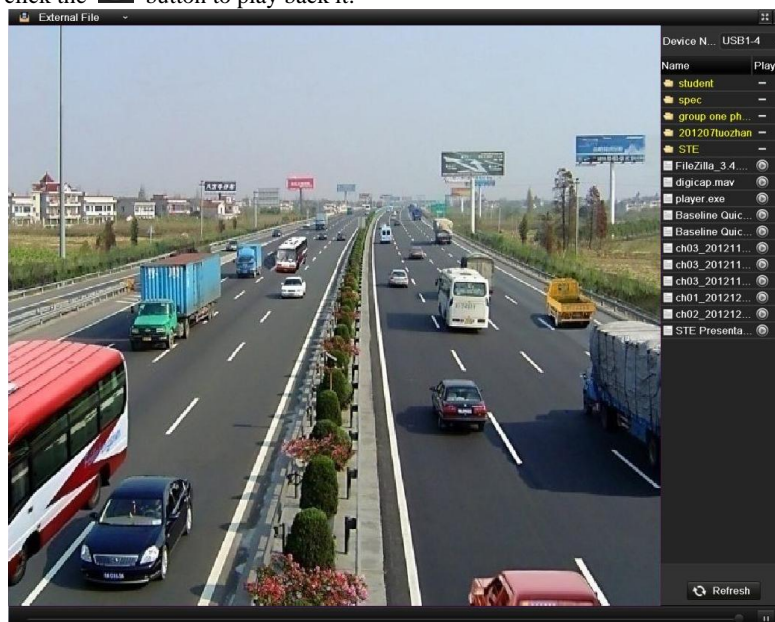


Figure 6.20 Interface of External File Playback

6.2 Auxiliary Functions of Playback


6.2.1 Playing Back Frame by Frame



Purpose:

Play video files frame by frame, in case of checking image details of the video when abnormal events happen.

Steps:

Go to Playback interface.

If you choose playback of the record file: click button  until the speed changes to Single frame and one click on the playback screen represents playback of one frame.

If you choose adverse playback of the record file: click button  until the speed changes to Single frame and one click on the playback screen represents adverse playback of one frame. It is also feasible to use button  in toolbar.

6.2.2 Digital Zoom

Steps:


1. Click the  button on the playback control bar to enter Digital Zoom interface.
2. Use the mouse to draw a red rectangle and the image within it will be enlarged up to 16 times.



Figure 6. 21 Draw Area for Digital Zoom

3. Right-click the image to exit the digital zoom interface.

6.2.3 Reverse Playback of Multi-channel

Purpose:

You can play back record files of multi-channel reversely. Up to 8-ch (with 4CIF resolution) simultaneous adverse


playback is supported; up to 4-ch (with 720P resolution) simultaneous adverse playback is supported, up to 2-ch (with 1080P resolution) and up to 1-ch (with 5MP resolution) reverse playback is supported.

Steps:

1. Enter Playback interface.
Menu>Playback
2. Check more than one checkboxes to select multiple channels and click to select a date on the calendar.



Figure 6. 22 4-ch Synchronous Playback Interface

3. Click  to play back the record files reversely.

Chapter 7 Backup

7.1 Backing up Record Files

7.1.1 Quick Export

Purpose:

Export record files to backup device(s) quickly.

Steps:

1. Enter Video Export interface.

Menu>Export>Normal

Choose the channel(s) you want to back up and click **Quick Export** button.



- The time duration of record files on a specified channel cannot exceed one day. Otherwise, the message box “Max. 24 hours are allowed for quick export.” will pop up.
- The number of channels for synchronous export cannot exceed 4. Otherwise, the message box “Max. 4 channels are allowed for synchronous quick export.” will pop up.

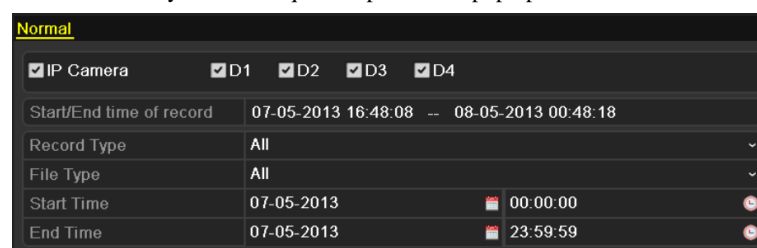


Figure 7. 1 Quick Export Interface

1. Click the **Export** button to start exporting.



Here we use USB Flash Drive and please refer to the next section Normal Backup for more backup devices supported by the device.

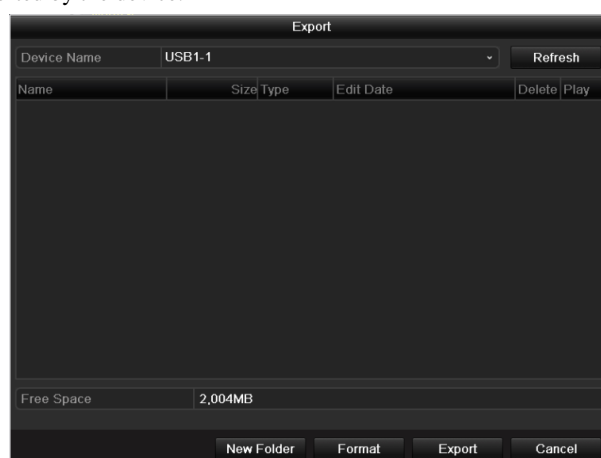


Figure 7. 2 Quick Export using USB1-1

Stay in the Exporting interface until all record files are exported.

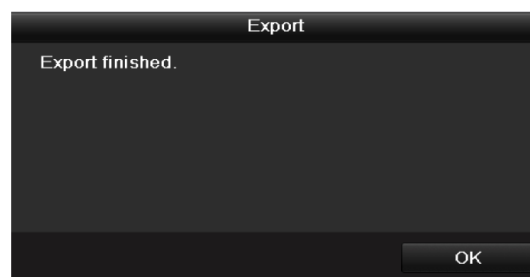


Figure 7.3 Export Finished

2. Check backup result.

Choose the record file in Export interface and click button  to check it.



The Player player.exe will be exported automatically during record file export.

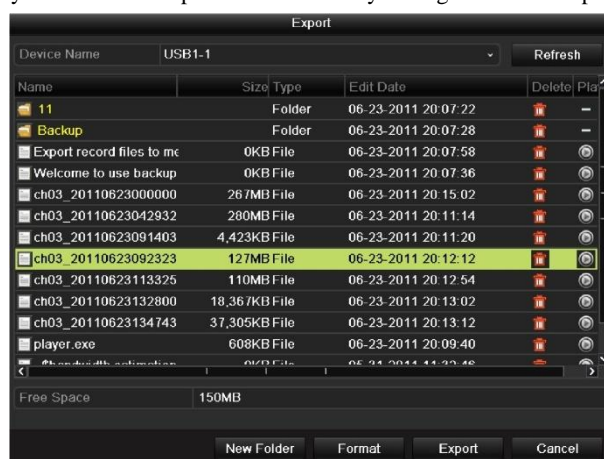


Figure 7.4 Checkup of Quick Export Result Using USB1-1

7.1.2 Backing up by Normal Video Search

Purpose:

The record files can be backup to various devices, such as USB devices (USB flash drives, USB HDDs, USB writer), and SATA writer.

Backup using USB flash drives and USB HDDs

Steps:

1. Enter Export interface.
Menu>Export>Normal
2. Set search condition and click **Search** button to enter the search result interface.

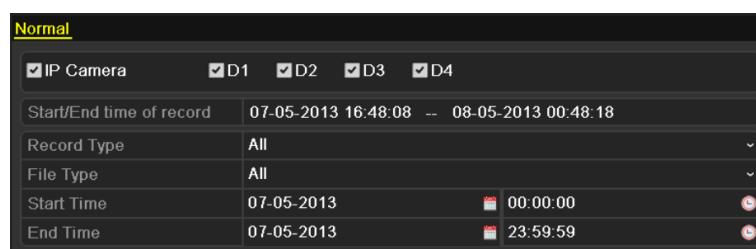


Figure 7.5 Normal Video Search for Backup

3. Select record files you want to back up.

Click to play the record file if you want to check it.

Check the checkbox before the record files you want to back up.



The size of the currently selected files is displayed in the lower-left corner of the window.

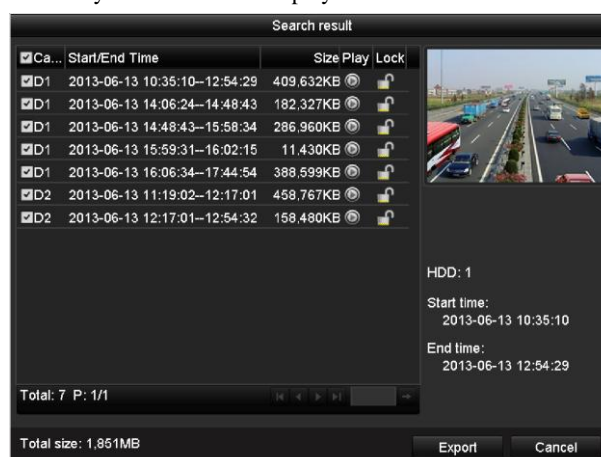


Figure 7.6 Result of Normal Video Search for Backup

4. Export.

Click **Export** button and start backup.



If the inserted USB device is not recognized:

- Click the **Refresh** button.
- Reconnect device.
- Check for compatibility from vendor.

You can also format USB flash drives or USB HDDs via the device.

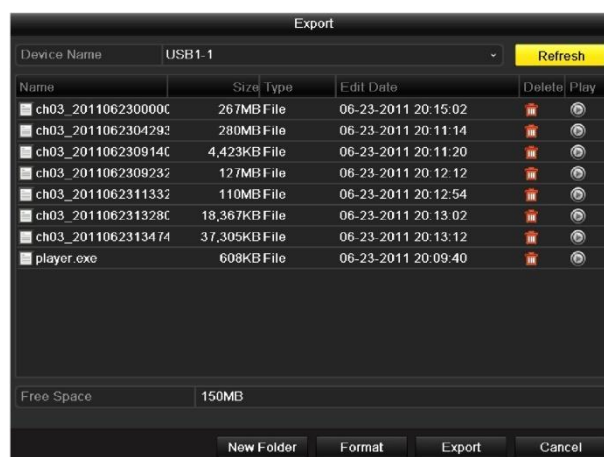


Figure 7.7 Export by Normal Video Search using USB Flash Drive

Stay in the Exporting interface until all record files are exported with pop-up message box “Export finished”.

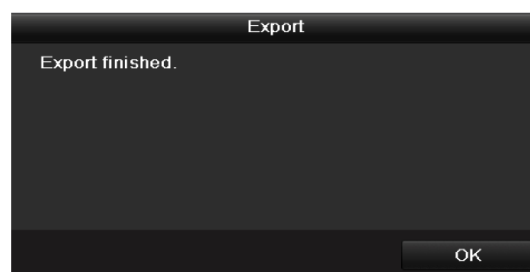



Figure 7.8 Export Finished

5. Check backup result.

Choose the record file in Export interface and click button  to check it.



The Player player.exe will be exported automatically during record file export.

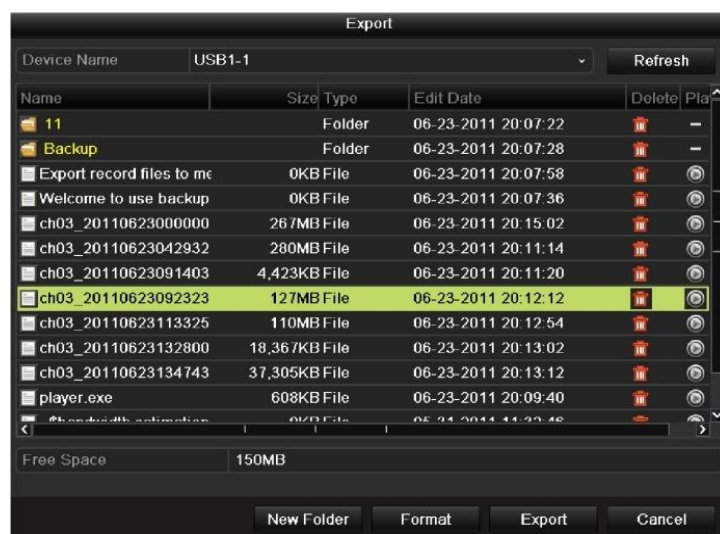


Figure 7.9 Checkup of Export Result using USB Flash Drive

Backup using USB writer and SATA writer

Steps:

1. Enter Export interface.
Menu>Export>Normal
2. Set search condition and click Search button to enter the search result interface.

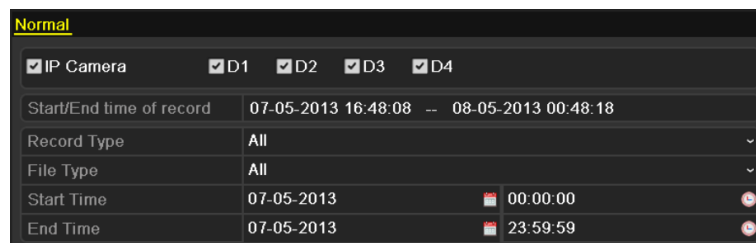



Figure 7. 10 Normal Video Search for Backup

3. Select record files you want to back up.
Click button  to play the record file if you want to check it.
Check the checkbox before the record files you want to back up.



The size of the currently selected files is displayed in the lower-left corner of the window.

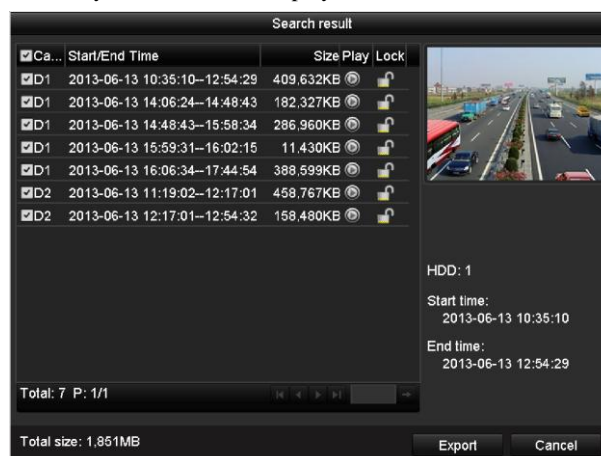


Figure 7. 11 Result of Normal Video Search for Backup

4. Export.
Click **Export** button and start backup.



If the inserted USB writer or SATA writer is not recognized:

- Click the **Refresh** button.
- Reconnect device.
- Check for compatibility from vendor.



Figure 7.12 Export by Normal Video Search using USB Writer

Stay in the Exporting interface until all record files are exported with pop-up message box “Export finished”.

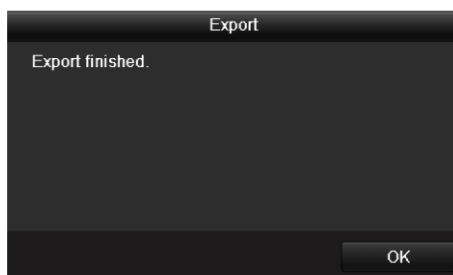



Figure 7.13 Export Finished

5. Check backup result.

Choose the record file in Export interface and click button  to check it.



The Player player.exe will be exported automatically during record file export.

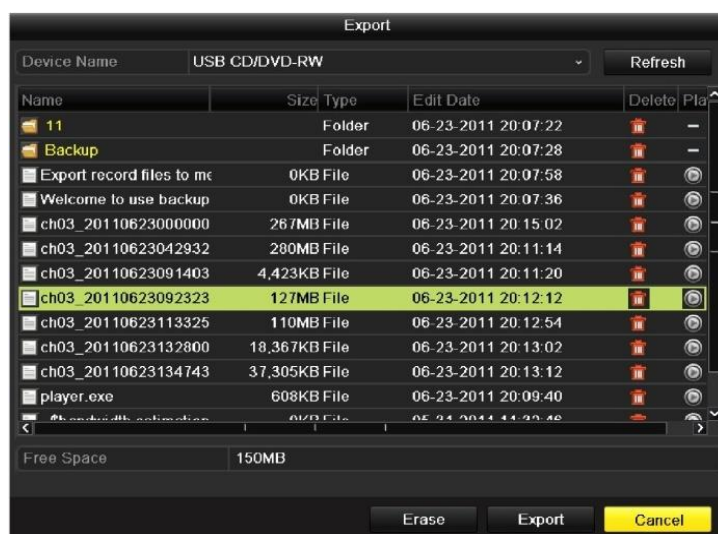


Figure 7.14 Checkup of Export Result using USB Writer

7.1.3 Backing up by Event Search

Purpose:

Back up event-related record files using USB devices (USB flash drives, USB HDDs, USB writer), or SATA writer. Quick Backup and Normal Backup are supported.

Steps:

1. Enter Export interface.

Menu>Export>Event

- 1) Set the searching time period.
- 2) Click **Search** button to enter the Search Result interface.



Figure 7. 15 Event Search for Backup

2. Select record files to export.

- 1) Select a motion event in the list and click **Quick Export** button to enter Export interface immediately.
- 2) Clicking **Details** button will take you to the interface with detailed information of all channels triggered by the selected motion event.
- 3) Clicking **Quick Export** button will export record files of all channels triggered by the selected motion event.

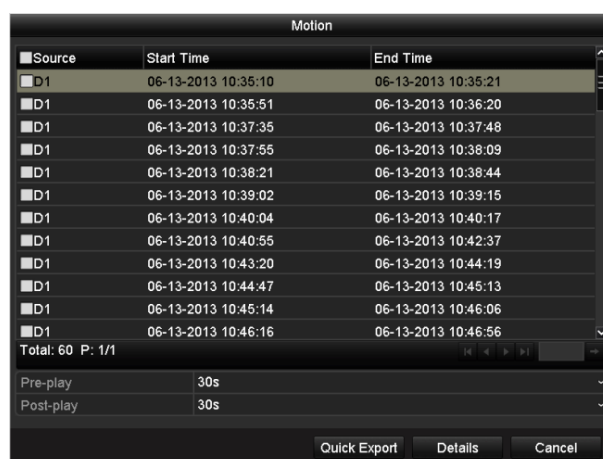


Figure 7. 16 Result of Event Search

- 4) Click **Details** button to view detailed information of the record file, e.g. start time, end time, file size, etc.

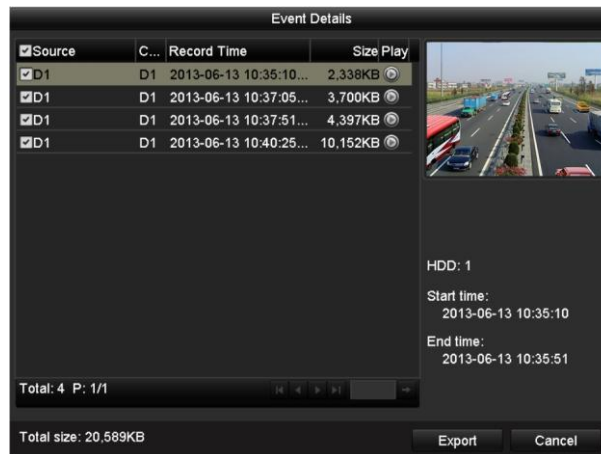


Figure 7.17 Event Details Interface

3. Export.

Click the **Export** button and start back up.



If the inserted USB device is not recognized:

- Click the Refresh button.
- Reconnect device.
- Check for compatibility from vendor.

You can also format USB flash drive or USB HDDs via the device.

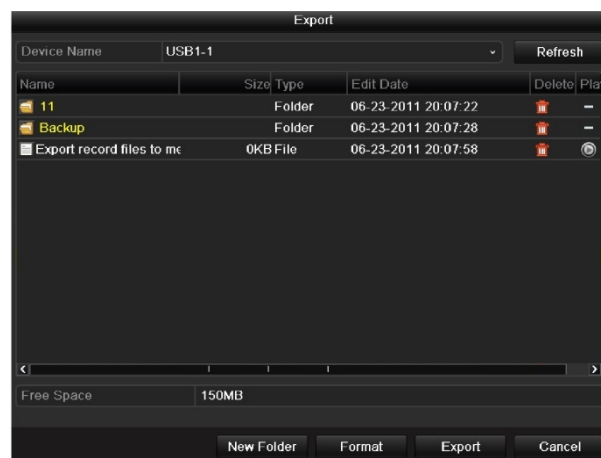


Figure 7.18 Export by Event Using USB Flash Drive

Stay in the Exporting interface until all record files are exported with pop-up message “Export finished”.

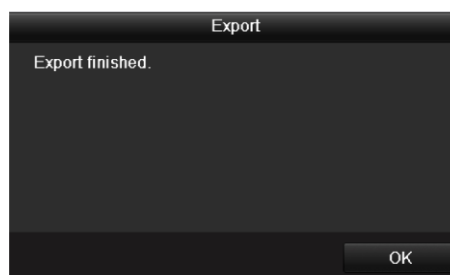


Figure 7.19 Export Finished

4. Check backup result.



The Player player.exe will be exported automatically during record file export.

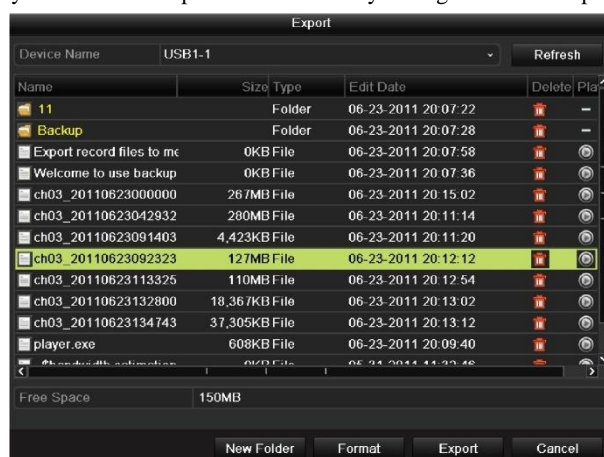


Figure 7. 20 Checkup of Event Export Result Using USB Flash Drive

7.1.4 Backing up Video Clips

Purpose:

You may also select video clips to export directly during Playback, using USB devices (USB flash drives, USB HDDs, USB writer) or SATA writer.

Steps:

1. Enter Playback interface.
Please refer to *Chapter 6.1 Playing Back Record Files*.
2. During playback, use buttons and in the playback toolbar to start or stop clipping record file(s).
3. Quit Playback interface after finishing clipping and you will then be prompted to save the clips.



A maximum of 30 clips can be selected for each channel.



Figure 7.21 Interface of Playback by Time

4. Click **Yes** to save video clips and enter Export interface, or click **No** to quit and do not save video clips.

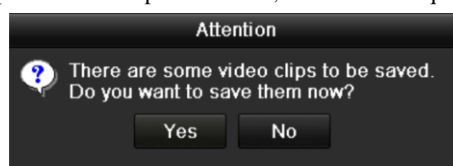


Figure 7.22 Attention to Video Clip Saving

5. Export.

Click **Export** button and start backup.



If the inserted USB device is not recognized:

- Click the **Refresh** button.
- Reconnect device.
- Check for compatibility from vendor.

You can also format USB flash drive or USB HDDs via the device.

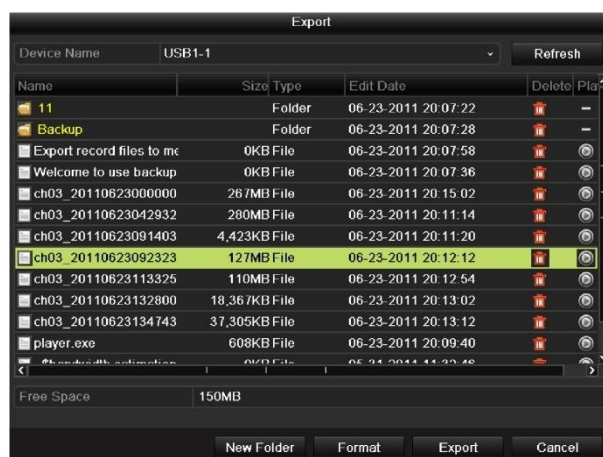


Figure 7.23 Export Video Clips Using USB Flash Drive

Stay in the Exporting interface until all record files are exported with pop-up message “Export finished”.

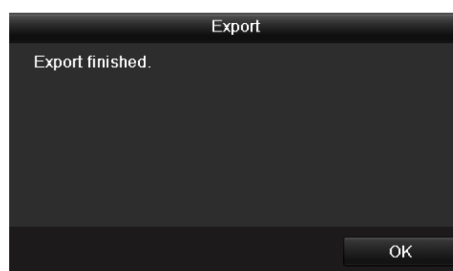


Figure 7.24 Export Finished

6. Check backup result.



The Player player.exe will be exported automatically during record file export.

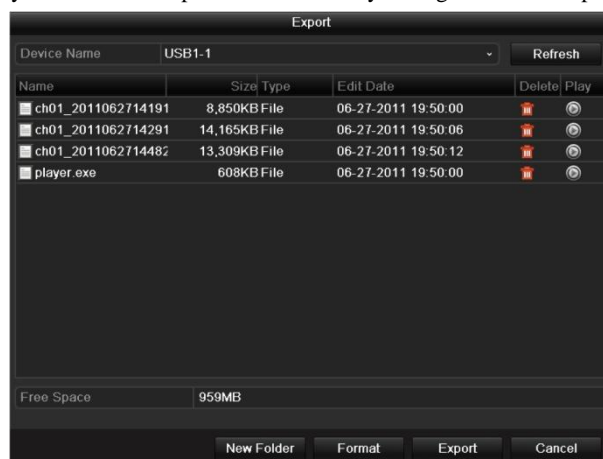


Figure 7.25 Checkup of Video Clips Export Result Using USB Flash Drive

7.2 Managing Backup Devices

Management of USB flash drives and USB HDDs.

Steps:

1. Enter Search Result interface of record files.

Menu>Export>Normal

Set search condition and click **Search** button to enter Search Result interface.



At least one channel shall be selected.

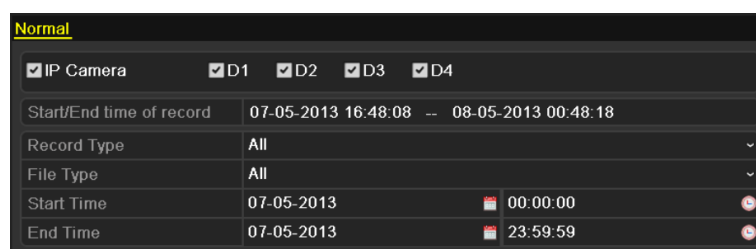


Figure 7.26 Normal Video Search for Backup

2. Select record files you want to back up.

Click **Export** button to enter Export interface.



At least one record file shall be selected.

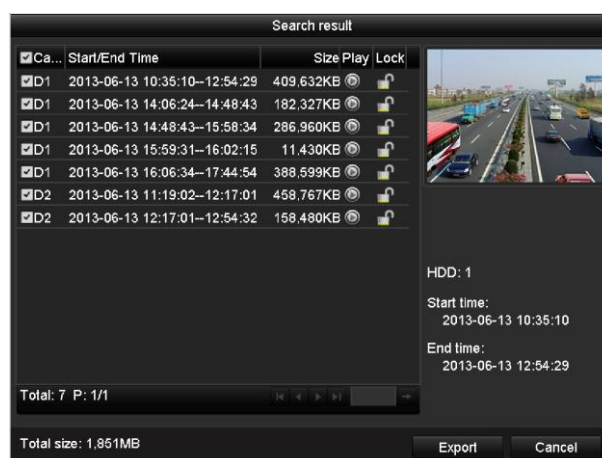


Figure 7.27 Result of Normal Video Search for Backup

3. Backup device management.

Click **New Folder** button if you want to create a new folder in the backup device.

Select a record file or folder in the backup device and click button if you want to delete it.

Select a record file in the backup device and click button to play it.

Click **Format** button to format the backup device.



If the inserted USB device is not recognized:

- Click the **Refresh** button.
- Reconnect device.
- Check for compatibility from vendor.

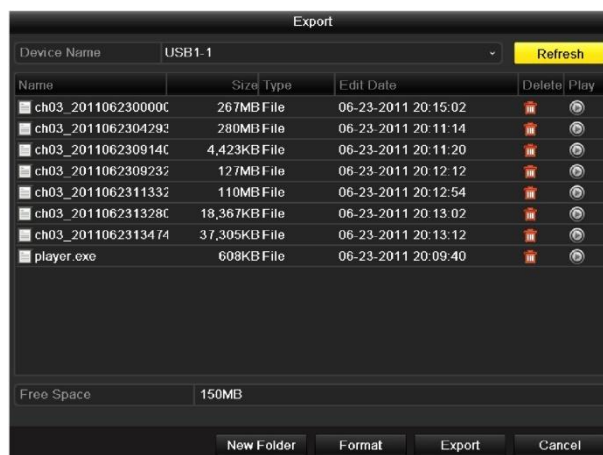


Figure 7. 28 USB Flash Drive Management

Management of USB writers or DVD-R/W

Steps:

1. Enter Search Result interface of record files.

Menu>Export>Normal

Set search condition and click **Search** button to enter Search Result interface.



At least one channel shall be selected.

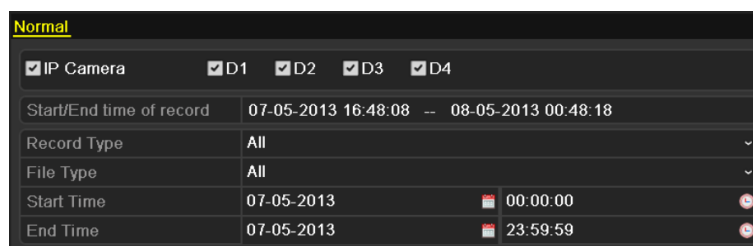


Figure 7. 29 Normal Video Search for Backup

2. Select record files you want to back up.

Click **Export** button to enter Export interface.



At least one record file shall be selected.

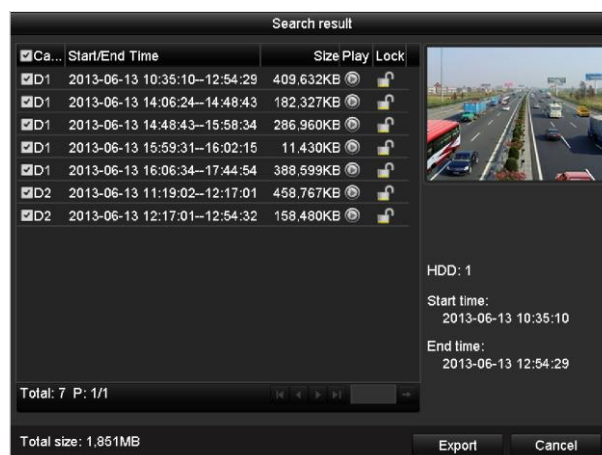


Figure 7. 30 Result of Normal Video Search for Backup

3. Backup device management.

Click **Erase** button if you want to erase the files from a re-writable CD/DVD.



There must be a re-writable CD/DVD when you make this operation.



If the inserted USB writer or DVD-R/W is not recognized:

- Click the **Refresh** button.
- Reconnect device.
- Check for compatibility from vendor.



Figure 7. 31 USB Writer Management

Chapter 8 Alarm Settings

8.1 Setting Motion Detection Alarm

Steps:

1. Enter Motion Detection interface of Camera Management and choose a camera you want to set up motion detection.

Menu> Camera> Motion

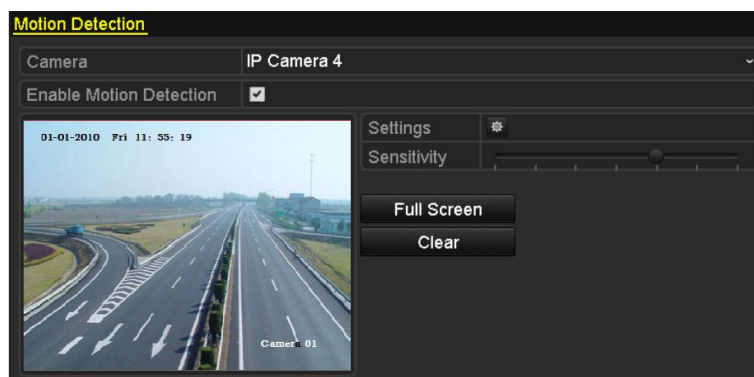



Figure 8.1 Motion Detection Setup Interface

2. Set up detection area and sensitivity.

Tick “Enable Motion Detection”, use the mouse to draw detection area(s) and drag the sensitivity bar to set sensitivity.

Click  button and set alarm response actions.

3. Click **Trigger Channel** tab and select one or more channels which will start to record or become full-screen monitoring when motion alarm is triggered, and click **Apply** to save the settings.

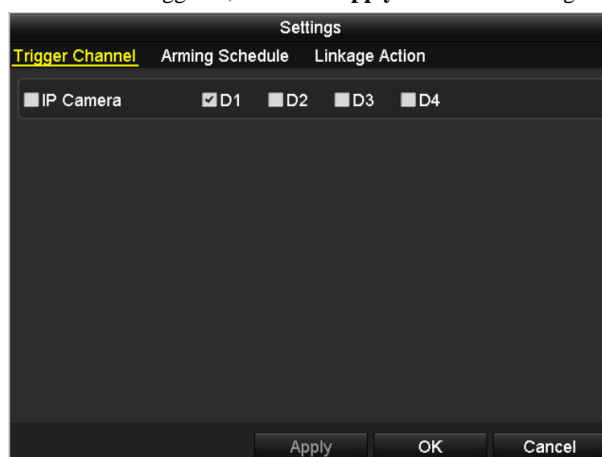


Figure 8.2 Set Trigger Camera of Motion Detection

4. Set up arming schedule of the channel.

- 1) Select Arming Schedule tab to set the arming schedule of handling actions for the motion detection.
- 2) Choose one day of a week and up to eight time periods can be set within each day.
- 3) Click **Apply** to save the settings



Time periods shall not be repeated or overlapped.

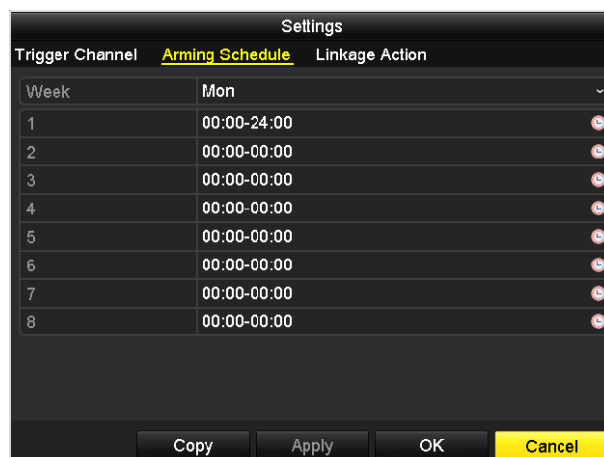


Figure 8. 3 Set Arming Schedule of Motion Detection

5. Click **Linkage Action** tab to set up alarm response actions of motion alarm (please refer to *Chapter 8.5 Setting Alarm Response Actions*).

Repeat the above steps to set up arming schedule of other days of a week. You can also use **Copy** button to copy an arming schedule to other days.

6. Click the **OK** button to complete the motion detection settings of the channel.

8.2 Detecting Video Loss Alarm

Purpose:

Detect video loss of a channel and take alarm response action(s).

Steps:

1. Enter Video Loss interface of Camera Management and select a channel you want to detect.

Menu> Camera> Video Loss

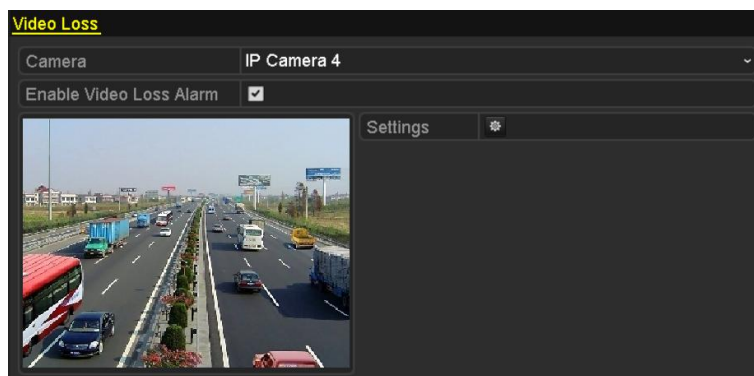



Figure 8.4 Video Loss Setup Interface

2. Set up handling method of video loss.

Check the checkbox of “Enable Video Loss Alarm”, and click  button to set up handling action of video loss.

3. Set up arming schedule of the channel.

- 1) Select Arming Schedule tab to set the channel’s arming schedule.
- 2) Choose one day of a week and up to eight time periods can be set within each day.
- 3) Click **Apply** button to save the settings.



Time periods shall not be repeated or overlapped.

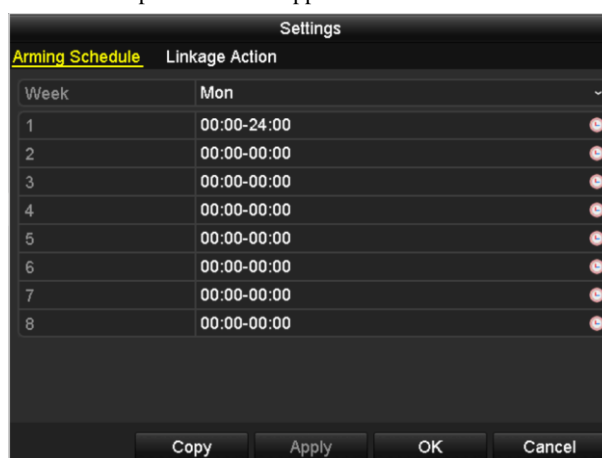


Figure 8.5 Set Arming Schedule of Video Loss

4. Select **Linkage Action** tab to set up alarm response action of video loss (please refer to *Chapter 8.5 Setting Alarm Response Actions*).

Repeat the above steps to set up arming schedule of other days of a week. You can also use **Copy** button to copy an arming schedule to other days.

5. Click the **OK** button to complete the video loss settings of the channel.

8.3 Detecting Video Tampering Alarm

Purpose:

Trigger alarm when the lens is covered and take alarm response action(s).

Steps:

1. Enter Video Tampering interface of Camera Management and select a channel you want to detect video tampering.

Menu> Camera> Tamper-proof

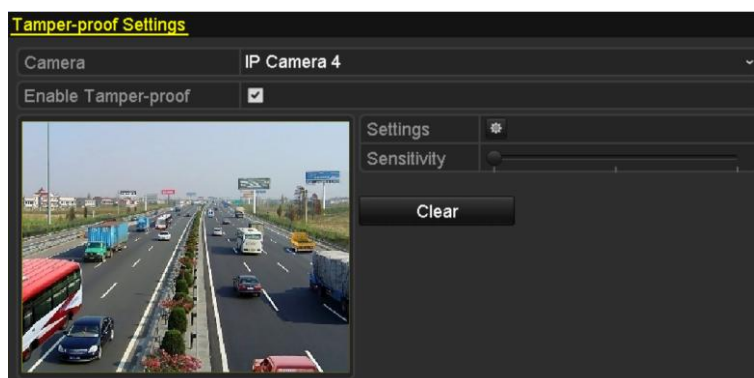



Figure 8. 6 Tamper-proof Setup Interface

2. Set the video tampering handling method of the channel.

Check the checkbox of “Enable Tamper-proof”.

Drag the sensitivity bar and choose a proper sensitivity level. Use the mouse to draw an area you want to detect video tampering.

Click  button to set handling method of video tampering.

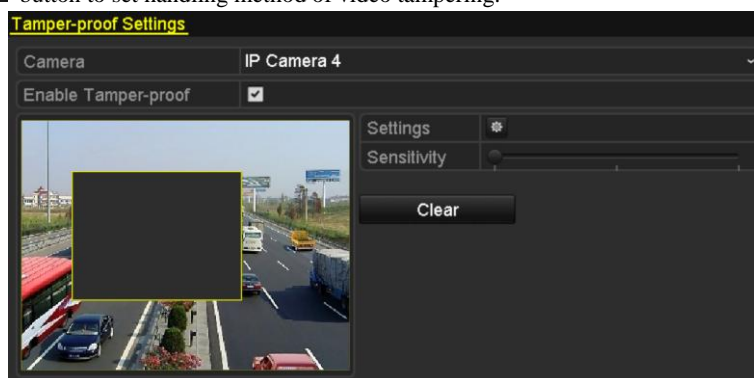


Figure 8. 7 Set Detection Area and Sensitivity of Video Tampering

3. Set arming schedule and alarm response actions of the channel.

- 1) Click Arming Schedule tab to set the channel’s arming schedule.
- 2) Choose one day of a week and Max. eight time periods can be set within each day.
- 3) Click **Apply** button to save the settings.



Time periods shall not be repeated or overlapped.

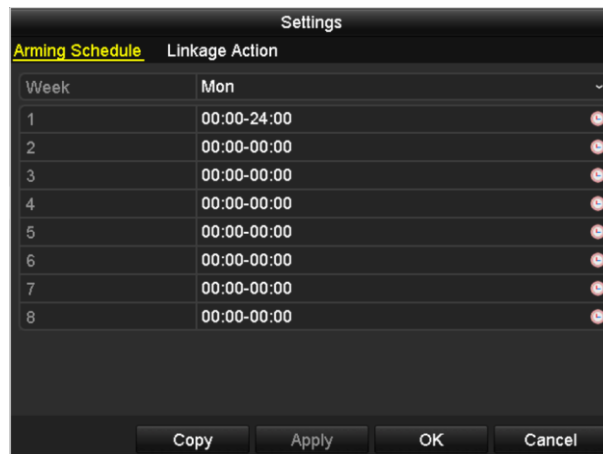


Figure 8. 8 Set Arming Schedule of Video Tampering

4. Select **Linkage Action** tab to set up alarm response actions of video tampering alarm (please refer to *Chapter 8.5 Setting Alarm Response Actions*).
Repeat the above steps to set up arming schedule of other days of a week. You can also use **Copy** button to copy an arming schedule to other days.
5. Click the **OK** button to complete the video tampering settings of the channel.

8.4 Handling Exceptions Alarm

Purpose:

Exception settings refer to the handling method of various exceptions, e.g.

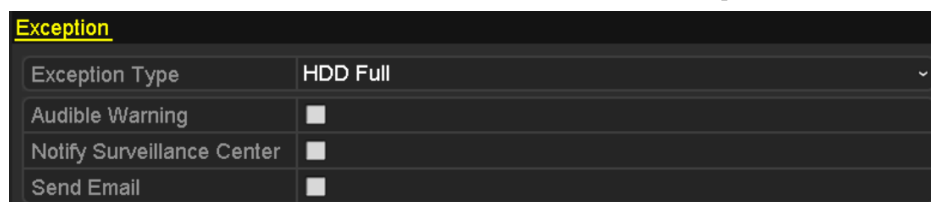
- **HDD Full:** The HDD is full.
- **HDD Error:** Writing HDD error or unformatted HDD.
- **Network Disconnected:** Disconnected network cable.
- **IP Conflicted:** Duplicated IP address.
- **Illegal Login:** Incorrect user ID or password.
- **Record Exception:** No space for saving recorded files.

Steps:

Enter Exception interface of System Configuration and handle various exceptions.

Menu> Configuration> Exceptions

Please refer to *Chapter 8.5 Setting Alarm Response Actions* for detailed alarm response actions.



The screenshot shows a web interface titled "Exception" in yellow text. Below the title is a table with two columns. The first column lists actions, and the second column shows their status for the "HDD Full" exception type.

Exception Type	HDD Full
Audible Warning	<input type="checkbox"/>
Notify Surveillance Center	<input type="checkbox"/>
Send Email	<input type="checkbox"/>

Figure 8. 9 Exceptions Setup Interface

8.5 Setting Alarm Response Actions

Purpose:

Alarm response actions will be activated when an alarm or exception occurs, including Full Screen Monitoring, Audible Warning (buzzer), Notify Surveillance Center, Trigger Alarm Output and Send Email.

Full Screen Monitoring

When an alarm is triggered, the local monitor (VGA or HDMI monitor) display in full screen the video image from the alarming channel configured for full screen monitoring.

If alarms are triggered simultaneously in several channels, their full-screen images will be switched at an interval of 10 seconds (default dwell time). A different dwell time can be set by going to Menu >Configuration>Live View, and set the value of Full Screen Monitoring Dwell Time.

Auto-switch will terminate once the alarm stops and you will be taken back to the Live View interface.



You must select during “Trigger Channel” settings the channel(s) you want to make full screen monitoring.

Audible Warning

Trigger an audible *beep* when an alarm is detected.

Notify Surveillance Center

Sends an exception or alarm signal to remote alarm host when an event occurs. The alarm host refers to the PC installed with Remote Client.



The alarm signal will be transmitted automatically at detection mode when remote alarm host is configured.

Please refer to *Chapter 9.2.5 Configuring Remote Alarm Host* for details of alarm host configuration.

Email Linkage

Send an email with alarm information to a user or users when an alarm is detected.

Please refer to *Chapter 9.2.9 Configuring Email* for details of Email configuration.

Chapter 9 Network Settings

9.1 Configuring General Settings

Purpose:

Network settings must be properly configured before you operate NVR over network.

Steps:

1. Enter the Network Settings interface.

Menu >Configuration>Network

2. Select the **General** tab.

NIC Type	10M/100M Self-adaptive
Enable DHCP	<input type="checkbox"/>
IPv4 Address	172 .6 .23 .185
IPv4 Subnet Mask	255 .255 .255 .0
IPv4 Default Gateway	172 .6 .23 .1
IPv6 Address 1	fe80::2ff:8ff:fe0c:f46a/64
IPv6 Address 2	
IPv6 Default Gateway	
MAC Address	00:ff:8f:0c:f4:6a
MTU(Bytes)	1500
Preferred DNS Server	
Alternate DNS Server	

DS-7100NI-SL, DS-7100NI-SN and DS-7600NI-SN

Working Mode	Multi-address
Select NIC	LAN
NIC Type	10M/100M Self-adaptive
Enable DHCP	<input type="checkbox"/>
IPv4 Address	172 .6 .23 .104
IPv4 Subnet Mask	255 .255 .255 .0
IPv4 Default Gateway	172 .6 .23 .1
IPv6 Address 1	fe80::4619:b6ff:fe02:9f71/64
IPv6 Address 2	
IPv6 Default Gateway	
MAC Address	44:19:b6:02:9f:71
MTU(Bytes)	1500
Preferred DNS Server	192.168.254.1
Alternate DNS Server	
Default Route	LAN

DS-7100NI-SL/W

NIC Type	10M/100M/1000M Self-adaptive
Enable DHCP	<input type="checkbox"/>
IPv4 Address	172 .6 .23 .8
IPv4 Subnet Mask	255 .255 .255 .0
IPv4 Default Gateway	172 .6 .23 .1
IPv6 Address 1	fe80::8ee7:48ff:fe16:f73c/64
IPv6 Address 2	
IPv6 Default Gateway	
MAC Address	8c:e7:48:16:f7:3c
MTU(Bytes)	1500
Preferred DNS Server	10.1.7.88
Alternate DNS Server	10.1.7.77
Internal NIC IPv4 Address	192 .168 .254 .1

DS-7100NI-SN/E, DS-7100NI-SN/P, DS-7600NI-SN/E and DS-7600NI-SN/P

Figure 9. 1 Network Settings Interface

3. In the **General Settings** interface, you can configure the following settings: NIC Type, IPv4 Address, IPv4 Gateway, MTU, DNS Server and Default Route.



- The DS-7100NI-SL/W series NVR supports the wireless AP function, which means it can connect with the wireless IP camera via WLAN. To set the WLAN, select WLAN in the **Select NIC** drop-down list, and then configure the general parameters.
- It's highly recommended to set the LAN as the Default Route, or network may be disconnected.
- For the DS-7100NI-SN/E, DS-7100NI-SN/P, DS-7600NI-SN/E and DS-7600NI-SN/P series NVR, you need to configure the internal NIC address, so that IP addresses are assigned to the cameras connected to the PoE or built-in switch interfaces.
- The valid value range of MTU is 500 ~ 9676.

If the DHCP server is available, you can click the checkbox of **DHCP** to automatically obtain an IP address and other network settings from that server.

4. After configuring the general settings, click **Apply** to save the settings.

9.2 Configuring Advanced Settings

9.2.1 Configuring PPPoE Settings

Purpose:

Your NVR also allows access by Point-to-Point Protocol over Ethernet (PPPoE).

Steps:

1. Enter the **Network Settings** interface.
Menu >Configuration> Network
2. Select the **PPPoE** tab to enter the PPPoE Settings interface, as shown in Figure 9. 2.

Enable PPPOE	<input type="checkbox"/>
User Name	
Password	

Figure 9. 2 PPPoE Settings Interface

3. Check the **PPPoE** checkbox to enable this feature.
4. Enter **User Name** and **Password** for PPPoE access.



The User Name and Password should be assigned by your ISP.

5. Click **Apply** to save and exit the interface.
6. After successful settings, the system asks you to reboot the device to enable the new settings, and the PPPoE dial-up is automatically connected after reboot.
You can go to Menu >Maintenance>System Info >Network interface to view the status of PPPoE connection.
Please refer to *Chapter 12.1 Viewing System Information* for PPPoE status.

9.2.2 Configuring WIFI



This section is only supported by DS-7100NI-SL/W series NVR.

Purpose:

After setting the WLAN parameters, you may set the WIFI parameters to activate the WIFI function. You can both get access to the NVR and add wireless IP camera to the NVR via the WIFI.

Setting the WIFI

Steps:

1. Enter the Network Settings interface.
Menu >Configuration> Network
2. Click the WIFI tab to enter WIFI settings interface, as shown in the Figure 9. 3

SSID	71test			
Work Channel	autoSelect			
Encrypt Mode	TKIP_AES			
Encrypt Key	0123456789			
Security Type	Disable			
DHCP Start-Stop	192 . 168 . 254 . 100		192 . 168 . 254 . 254	
IP Address	MAC Address	Rate	RSSI	BandWidth
<div>Upgrade</div> <div>Apply</div> <div>Back</div>				

Figure 9. 3 WIFI Settings Interface

3. Configure the following parameters:

- **SSID:** SSID is short for Service Set Identifier, and it is displayed as the WIFI name when you search the available WIFI hotspots via other devices with WLAN function. Fill in the blank of SSID on your demand with any characters or numbers.



The SSID can contain any character, and the length of it should be no longer than 32.

- **Work Channel:** Select the work channel for WIFI. And each channel stands for its own work frequency. The work channel is set as autoSelect by default.
- **Security Type:** The security is for the WIFI access, if other people want to get access to the WIFI, they have to input the correct password which is configured by you. You can choose to disable the WIFI security, or three types of security are selectable: WPA PSK, WPA2 PSK and WPAPSK WPA2PSK.
- **Encrypt Mode:** If the selected Security Type is not Disable, please select the encrypt type in the corresponding drop-down list; there're TKIP, AES and TKIP_AES selectable.
- **Encrypt Key:** Set the WIFI password in the text filed.



The Encrypt Key can contain any character, and the length of it should be in the range of 8 to 64.

- **DHCP Start-Stop:** If the DHCP of a device which connects to the WIFI is enabled, the NVR will allocate the IP address in the configured range to it automatically.

4. Click **Apply** to finish the settings.

After the WIFI settings take effect, the NVR can automatically detect the available wireless IP cameras. And the detected cameras will be displayed in the IP camera list (Menu > Camera), and then you can add it as the normal IP camera. Additionally, the IP camera from our manufacture which is used for the first time can be connected directly by the NVR once it powers on. And in the lower part of the WIFI setting interface, you can see the list of wirelessly connected devices.

Updating the Firmware

Steps:

1. Save the upgrade file in a USB storage device and connect it to the NVR.
2. Click the **Update** button and select the upgrade file in the pop-up USB device file list.

You can see the current version of the WIFI firmware on the bottom of the pop-up window.

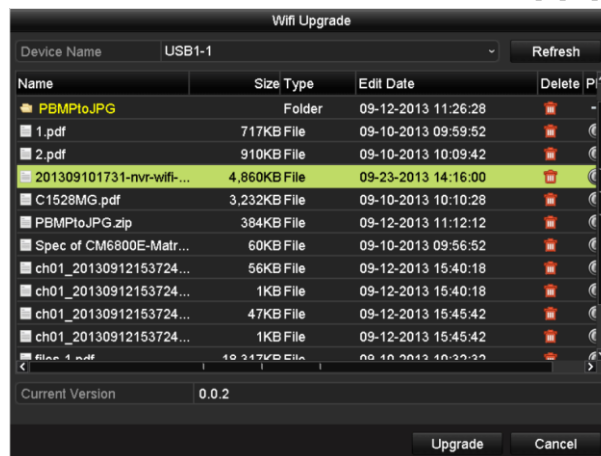


Figure 9. 4 USB Device Interface

3. Click the **Upgrade** button to start upgrading.

9.2.3 Configuring DDNS

Purpose:

If your NVR is set to use PPPoE as its default network connection, you may set Dynamic DNS (DDNS) to be used for network access.

Prior registration with your ISP is required before configuring the system to use DDNS.

Steps:

1. Enter the Network Settings interface.
Menu > Configuration > Network
2. Select the **DDNS** tab to enter the DDNS Settings interface, as shown in Figure 9. 5.



Figure 9. 5 DDNS Settings Interface

3. Check the **DDNS** checkbox to enable this feature.
4. Select **DDNS Type**. Five different DDNS types are selectable: IPServer, DynDNS, PeanutHull, NO-IP and HiDDNS.
 - **IPServer:** Enter **Server Address** for IPServer.

Enable DDNS	<input checked="" type="checkbox"/>
DDNS Type	IPServer
Server Address	
Device Domain Name	
Status	Off-Line
User Name	
Password	
Confirm	

Figure 9. 6 IPServer Settings Interface

- **DynDNS:**

- 1) Input **Server Address** for DynDNS (i.e. members.dyndns.org).
- 2) In the NVR Domain Name text field, enter the domain obtained from the DynDNS website.
- 3) Enter the **User Name** and **Password** registered in the DynDNS website.

Enable DDNS	<input checked="" type="checkbox"/>
DDNS Type	DynDNS
Server Address	
Device Domain Name	
Status	Off-Line
User Name	
Password	
Confirm	

Figure 9. 7 DynDNS Settings Interface

- **PeanutHull:** Enter the **User Name** and **Password** obtained from the PeanutHull website.

Enable DDNS	<input checked="" type="checkbox"/>
DDNS Type	PeanutHull
Server Address	
Device Domain Name	
Status	Off-Line
User Name	
Password	
Confirm	

Figure 9. 8 PeanutHull Settings Interface

- **NO-IP:**

Enter the account information in the corresponding fields. Refer to the DynDNS settings.

- 1) Enter **Server Address** for NO-IP.
- 2) In the NVR Domain Name text field, enter the domain obtained from the NO-IP website (www.no-ip.com).
- 3) Enter the **User Name** and **Password** registered in the NO-IP website.

Enable DDNS	<input checked="" type="checkbox"/>
DDNS Type	NO-IP
Server Address	
Device Domain Name	
Status	Off-Line
User Name	
Password	
Confirm	

Figure 9. 9 NO-IP Settings Interface

- **HiDDNS:**

Enter the **Server Address** and **Device Domain Name** for HiDDNS.


- 1) The **Server Address** of the HiDDNS server displays as www.hik-online.com by default.
- 2) Enter the **Device Domain Name**. You can use the alias you registered in the HiDDNS server or define a new device domain name. If a new alias of the device domain name is defined in the NVR, it will replace the old one registered on the server. You can register the alias of the device domain name in the HiDDNS server first and then enter the alias to the **Device Domain Name** in the NVR; you can also enter the domain name directly on the NVR to create a new one.

Enable DDNS	<input checked="" type="checkbox"/>
DDNS Type	HiDDNS
Server Address	www.hik-online.com
Device Domain Name	
Status	Off-Line
User Name	
Password	
Confirm	

Figure 9.10 HiDDNS Settings Interface

Register the device on the HiDDNS server.

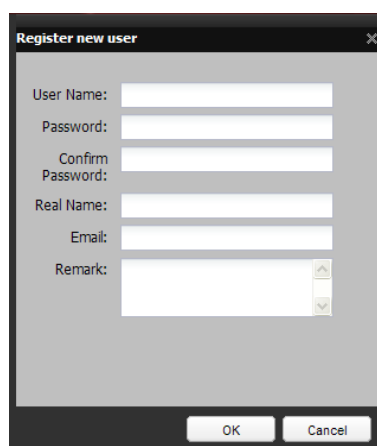
- i. Go to the HiDDNS website: www.hik-online.com.
- ii. Click [Register new user](#) to register an account if you do not have one and use the account to log in.



A dialog box titled "Register new user" with a close button (X) in the top right corner. It contains several input fields: "User Name:", "Password:", "Confirm Password:", "Real Name:", "Email:", and "Remark:". The "Remark:" field has a small upward arrow icon on its right side. At the bottom, there are "OK" and "Cancel" buttons.

Figure 9.11 Register an Account

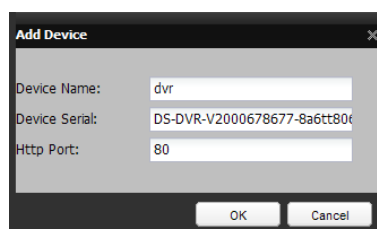- iii. In the Device Management interface, click  Add to register the device.



A dialog box titled "Add Device" with a close button (X) in the top right corner. It contains three input fields: "Device Name:" with the value "dvr", "Device Serial:" with the value "DS-DVR-V2000678677-8a6tt806", and "Http Port:" with the value "80". At the bottom, there are "OK" and "Cancel" buttons.

Figure 9.12 Register the Device



The device name can only contain the lower-case English letter, numeric and '-'; and it

must start with the lower-case English letter and cannot end with '-'.

Access the Device via Web Browser or Client Software

After having successfully registered the device on the HiDDNS server, you can access your device via web browser or Client Software with the **Device Domain Name (Device Name)**.

OPTION 1: Access the Device via Web Browser

Open a web browser, and enter `http://www.hik-online.com/alias` in the address bar. Alias refers to the **Device Domain Name** on the device or the **Device Name** on the HiDDNS server.

Example: `http://www.hik-online.com/nvr`



If you mapped the HTTP port on your router and changed it to port No. except 80, you have to enter `http://www.hik-online.com/alias:HTTP port` in the address bar to access the device. You can refer to *Chapter 9.2.10* for the mapped HTTP port No..

OPTION 2: Access the Devices via iVMS4200

For iVMS-4200, in the Add Device window, select **HiDDNS** and then edit the device information.

Nickname: Edit a name for the device as you want.

Server Address: `www.hik-online.com`

Device Domain Name: It refers to the **Device Domain Name** on the device or the **Device Name** on the HiDDNS server you created.

User Name: Enter the user name of the device. By default it is admin.

Password: Enter the password of the device. By default it is 12345.

Figure 9.13 Access Device via iVMS4200

5. Click **Apply** button to save and exit the interface.

9.2.4 Configuring NTP Server

Purpose:

A Network Time Protocol (NTP) Server can be configured on your NVR to ensure the accuracy of system date/time.

Steps:

1. Enter the Network Settings interface.

Menu >Configuration> Network

2. Select the **NTP** tab to enter the NTP Settings interface, as shown in Figure 9. 14.

Enable NTP	<input checked="" type="checkbox"/>
Interval (min)	60
NTP Server	
NTP Port	123

Figure 9. 14 NTP Settings Interface

3. Check the **Enable NTP** checkbox to enable this feature.
4. Configure the following NTP settings:
 - **Interval:** Time interval between the two synchronizing actions with NTP server. The unit is minute.
 - **NTP Server:** IP address of NTP server.
 - **NTP Port:** Port of NTP server.
5. Click **Apply** button to save and exit the interface.



The time synchronization interval can be set from 1 to 10080min, and the default value is 60min. If the NVR is connected to a public network, you should use a NTP server that has a time synchronization function, such as the server at the National Time Center (IP Address: 210.72.145.44). If the NVR is setup in a more customized network, NTP software can be used to establish a NTP server used for time synchronization.

9.2.5 Configuring Remote Alarm Host

Purpose:

With a remote alarm host configured, the NVR will send the alarm event or exception message to the host when an alarm is triggered. The remote alarm host must have the Network Video Surveillance software installed.

Steps:

1. Enter the Network Settings interface.
Menu > Configuration > Network
2. Select the **More Settings** tab to enter the More Settings interface, as shown in Figure 9. 15.

Alarm Host IP	
Alarm Host Port	0
Server Port	8000
HTTP Port	80
Multicast IP	
RTSP Port	554
Enable High-speed Dow...	<input type="checkbox"/>

Figure 9. 15 More Settings Interface

3. Enter **Alarm Host IP** and **Alarm Host Port** in the text fields.

The **Alarm Host IP** refers to the IP address of the remote PC on which the Network Video Surveillance Software (e.g., iVMS-4200) is installed, and the **Alarm Host Port** must be the same as the alarm monitoring port configured in the software.

Alarm Host IP	
Alarm Host Port	0

Figure 9. 16 Configure Alarm Host

4. Click **Apply** button to save and exit the interface.

9.2.6 Configuring Multicast

Purpose:

The multicast can be configured to realize live view for more than 128 connections through network for the device. A multicast address spans the Class-D IP range of 224.0.0.0 to 239.255.255.255. It is recommended to use the IP address ranging from 239.252.0.0 to 239.255.255.255.

Steps:

1. Enter the Network Settings interface.
Menu >Configuration> Network
2. Select the **More Settings** tab to enter the More Settings interface, as shown in Figure 9. 15.
3. Set **Multicast IP**, as shown in Figure 9. 17. When adding a device to the Network Video Surveillance Software, the multicast address must be the same as the NVR's multicast IP.

Server Port	8000
HTTP Port	80
Multicast IP	239.221.2.78

Figure 9. 17 Configure Multicast

4. Click **Apply** button to save and exit the interface.



The multicast function should be supported by the network switch to which the NVR is connected.

9.2.7 Configuring RTSP

Purpose:

The RTSP (Real Time Streaming Protocol) is a network control protocol designed for use in entertainment and communications systems to control streaming media servers.

Steps:

1. Enter the Network Settings menu
Menu >Configuration> Network
2. Select the **More Settings** tab to enter the More Settings menu, as shown in Figure 9. 15.

RTSP Port	554
-----------	-----

Figure 9. 18 RTSP Settings Interface

3. Enter the RTSP port in the text field of **RTSP Service Port**. The default RTSP port is 554, and you can change it according to different requirements.
4. Click **Apply** button to save and exit the menu.

9.2.8 Configuring Server and HTTP Ports

Purpose:

You can change the server and HTTP ports in the Network Settings menu. The default server port is 8000 and the default HTTP port is 80.

Steps:

1. Enter the Network Settings interface.
Menu >Configuration> Network
2. Select the **More Settings** tab to enter the More Settings interface, as shown in Figure 9. 15.
3. Enter new **Server Port** and **HTTP Port**.

Server Port	8000
HTTP Port	80
Multicast IP	

Figure 9. 19 Host/Others Settings Menu

4. Enter the Server Port and HTTP Port in the text fields. The default Server Port is 8000 and the HTTP Port is 80, and you can change them according to different requirements.
5. Click **Apply** button to save and exit the interface.



The Server Port should be set to the range of 2000-65535 and it is used for remote client software access.
The HTTP port is used for remote web access.

9.2.9 Configuring Email

Purpose:

The system can be configured to send an Email notification to all designated users if an alarm event is detected, etc., an alarm or motion event is detected or the administrator password is changed.

Before configuring the Email settings, the NVR must be connected to a local area network (LAN) that maintains an SMTP mail server. The network must also be connected to either an intranet or the Internet depending on the location of the e-mail accounts to which you want to send notification.

Steps:

1. Enter the Network Settings interface.
Menu >Configuration> Network
2. Set the IPv4 Address, IPv4 Subnet Mask, IPv4 Gateway and the Preferred DNS Server in the Network Settings menu.
3. Click **Apply** button to save the settings.
4. Select the **Email** tab to enter the Email Settings interface.

Enable Server Authentic...	<input type="checkbox"/>
User Name	
Password	
SMTP Server	
SMTP Port	25
Sender	
Sender's Address	
Select Receivers	Receiver 1
Receiver	
Receiver's Address	
Enable Attached Picture	<input type="checkbox"/>
Interval	2s

Figure 9.20 Email Settings Interface

5. Configure the following Email settings:

Enable Server Authentication (optional): Check the checkbox to enable the server authentication feature.

User Name: The user account of sender's Email for SMTP server authentication.

Password: The password of sender's Email for SMTP server authentication.

SMTP Server: The SMTP Server IP address or host name (e.g., smtp.263xmail.com).

SMTP Port No.: The SMTP port. The default TCP/IP port used for SMTP is 25.

Sender: The name of sender.

Sender's Address: The Email address of sender.

Select Receivers: Select the receiver. Up to 3 receivers can be configured.

Receiver: The name of user to be notified.

Receiver's Address: The Email address of user to be notified.

Enable Attached Picture (optional): Check the checkbox of **Enable Attached Picture** if you want to send email with attached alarm images. The interval is the time of two adjacent alarm images. You can also set SMTP port and enable SSL here.

Interval: The interval refers to the time between two actions of sending attached pictures.

Test: Sends a test message to verify that the SMTP server can be reached.

6. Click **Apply** button to save the Email settings.

7. You can click **Test** button to test whether your Email settings work. The corresponding Attention message box will pop up.

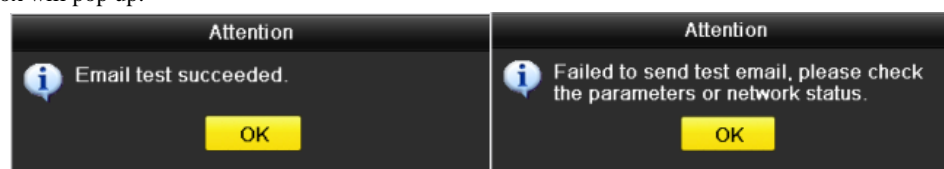


Figure 9.21 Email Testing Attention

9.2.10 Configuring UPnP™

Purpose:

Universal Plug and Play (UPnP™) can permit the device seamlessly discover the presence of other network

devices on the network and establish functional network services for data sharing, communications, etc. You can use the UPnP™ function to enable the fast connection of the device to the WAN via a router without port mapping.

Before you start:

If you want to enable the UPnP™ function of the device, you must enable the UPnP™ function of the router to which your device is connected. When the network working mode of the device is set as multi-address, the Default Route of the device should be in the same network segment as that of the LAN IP address of the router.

Steps:

1. Enter the Network Settings interface.
Menu > Configuration > Network
2. Select the **UPnP** tab to enter the UPnP™ interface.

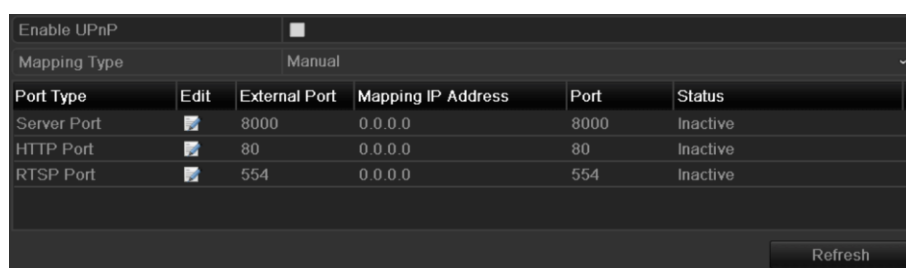


Figure 9.22 UPnP™ Settings Interface

3. Check ☒ checkbox to enable UPnP™.
4. Select the Mapping Type as Manual or Auto in the drop-down list.

OPTION 1: Auto

If you select Auto, the Port Mapping items are read-only, and the external ports are set by the router automatically.

Steps:

- 1) Click **Apply** button to save the settings.
- 2) You can click **Refresh** button to get the latest status of the port mapping.

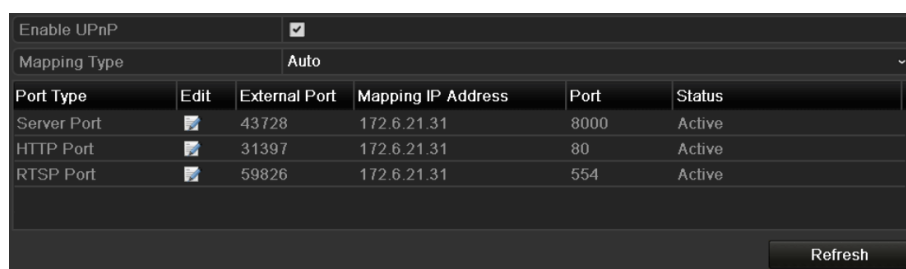


Figure 9.23 UPnP™ Settings Finished-Auto

OPTION 2: Manual

If you select Manual as the mapping type, you can edit the external port on your demand by clicking to activate the External Port Settings dialog box.

Steps:

- 1) Click to activate the External Port Settings dialog box. Configure the external port No. for server port, http port, and RTSP port respectively.



- You can use the default port No., or change it according to actual requirements.
- External Port indicates the port No. for port mapping in the router.
- The value of the RTSP port No. should be 554 or between 1024 and 65535, while the value of the other ports should be between 1 and 65535 and the value must be different from each other. If multiple devices are configured for the UPnP™ settings under the same router, the value of the port No. for each device should be unique.

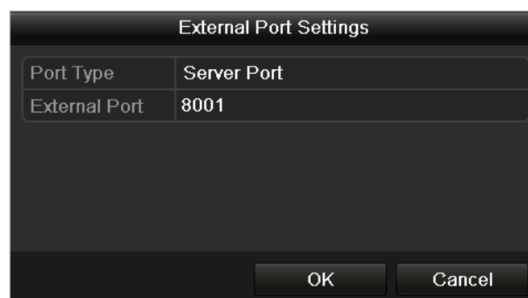


Figure 9.24 External Port Settings Dialog Box

- 2) Click **Apply** button to save the settings.
- 3) You can click **Refresh** button to get the latest status of the port mapping.

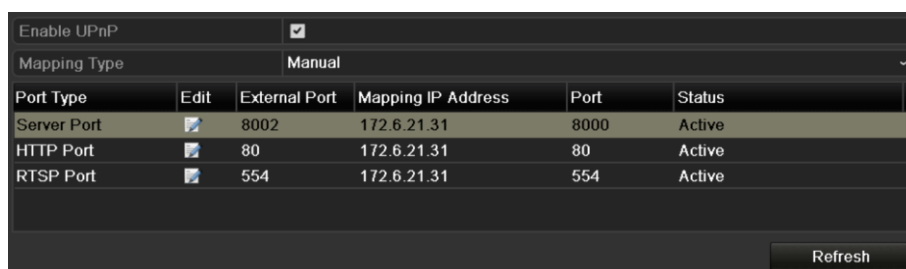


Figure 9.25 UPnP™ Settings Finished-Manual

9.2.11 Configuring High-speed Download

Purpose:

You can enable the High-speed Download function to widen the outgoing bandwidth of the device. In this way you can speed up the download of record files through web browser or CMS software.



If you enable the high-speed download function, the local menu operation will be affected. It is recommended to disable this function after finishing the remote downloading of record files.

Steps:

1. Enter the Network Settings interface.
Menu > Configuration > Network
2. Select the **More Settings** tab to enter the More Settings interface, as shown in Figure 9.15.
3. Check the checkbox of **Enable High-speed Download**. And click the **OK** button in the pop-up message box to confirm the settings.



Figure 9. 26 High-speed Download Settings Menu

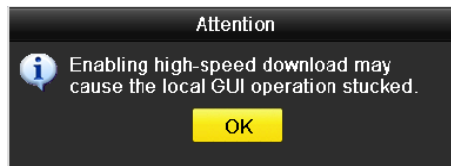


Figure 9. 27 Message Box of High-speed Download

4. Click **Apply** button to save and exit the interface.

9.3 Checking Network Traffic

Purpose:

You can check the network traffic to obtain real-time information of NVR such as linking status, MTU, sending/receiving rate, etc.

Steps:

1. Enter the Network Traffic interface.

Menu >Maintenance>Net Detect

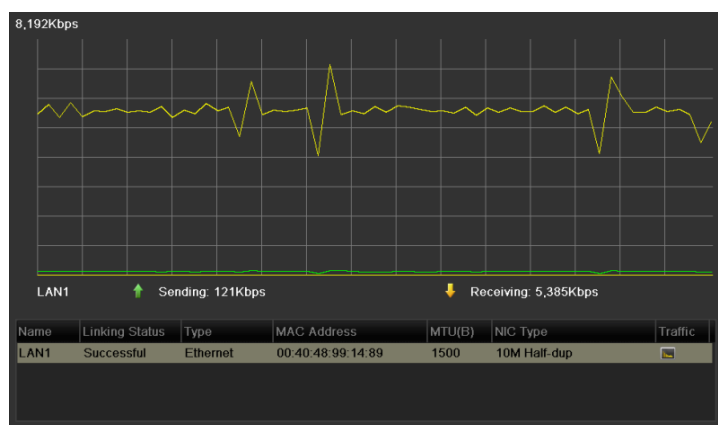


Figure 9.28 Network Traffic Interface

2. You can view the sending rate and receiving rate information on the interface. The traffic data is refreshed every 1 second.

9.4 Configuring Network Detection

Purpose:

You can obtain network connecting status of NVR through the network detection function, including network delay, packet loss, etc.

9.4.1 Testing Network Delay and Packet Loss

Steps:

1. Enter the Network Traffic interface.
Menu >Maintenance>Net Detect
2. Click the **Network Detection** tab to enter the Network Detection menu, as shown in Figure 9. 29.

Network Delay, Packet Loss Test		
Select NIC	LAN1	Test
Destination Address	172.6.23.110	
Network Packet Export		
Device Name	USB1-4	Refresh
LAN1	172.6.23.191	6,463Kbps
Export		

Figure 9. 29 Network Detection Interface

3. Enter the destination address in the text field of **Destination Address**.
4. Click **Test** to start testing network delay and packet loss. The testing result pops up on the window. If the testing is failed, the error message box will pop up as well. Refer to Figure 9. 30.

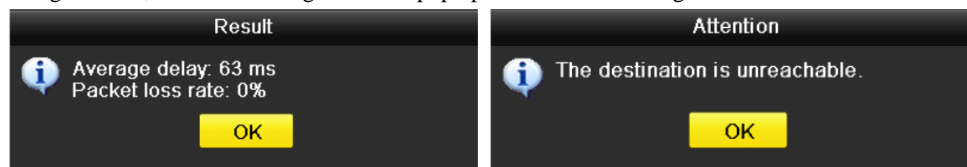


Figure 9. 30 Testing Result of Network Delay and Packet Loss

9.4.2 Exporting Network Packet

Purpose:

By connecting the NVR to network, the captured network data packet can be exported to USB-flash disk and other local backup devices.

Steps:

1. Enter the Network Traffic interface.
Menu >Maintenance>Net Detect
2. Click the **Network Detection** tab to enter the Network Detection interface.
3. Select the backup device from the dropdown list of Device Name, as shown in Figure 9. 31.



Click **Refresh** button if the connected local backup device cannot be displayed. When it fails to detect the backup device, please check whether it is compatible with the NVR. You can format the backup device if the format is incorrect.

Network Delay, Packet Loss Test			
Select NIC	LAN		
Destination Address	172.6.23.6		
Test			
Network Packet Export			
Device Name	USB1-1		
Refresh			
LAN	172.6.23.104	7,919Kbps	Export
WLAN	192.168.254.103	0bps	Export

DS-7100NI-SL/W

Network Delay, Packet Loss Test			
Select NIC	LAN1		
Destination Address	172.6.23.110		
Test			
Network Packet Export			
Device Name	USB1-4		
Refresh			
LAN1	172.6.23.191	6,463Kbps	Export

Other Models

Figure 9. 31 Export Network Packet

- Click **Export** to start exporting.



For the DS-7100NI-SL/W series NVR, the network packages of WLAN and LAN can be exported separately.

- After the exporting is complete, click **OK** to finish the packet export.

Packet exporting	Attention
<div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>	<div> Packet export succeeded. </div> <div>OK</div>
Cancel	

Figure 9. 32 Packet Export Attention



Up to 1M data can be exported each time.

9.4.3 Checking the Network Status

Purpose:

You can also check the network status and quick set the network parameters in this interface.

Steps:

Click **Status** button on the right bottom of the page.

Network Delay, Packet Loss Test

Select NIC: LAN1

Destination Address: 172.6.23.110

Test

Network Packet Export

Device Name: USB1-4

Refresh

LAN1	172.6.23.191	6,463Kbps
------	--------------	-----------

Export

Status Network Back

Figure 9. 33 Network status checking

If the network is normal the following message box pops out.

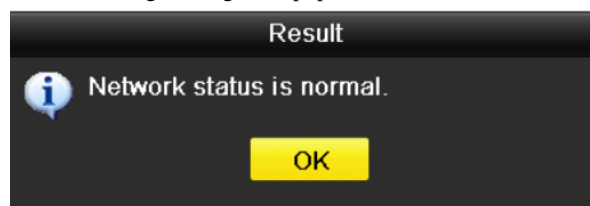


Figure 9. 34 Network status checking result

If the message box pops out with other information instead of this one, you can click **Network** button to show the quick setting interface of the network parameters.

9.4.4 Checking Network Statistics

Purpose:

You can check the network status to obtain the real-time information of NVR.

Steps:

1. Enter the Network Detection interface.
Menu>Maintenance>Net Detect
2. Choose the **Network Stat.** tab.

Type	Bandwidth
IP Camera	10Mbps
Remote Live View	0bps
Remote Playback	0bps
Net Receive Idle	10Mbps
Net Send Idle	40Mbps

Refresh

3. Check the bandwidth of IP Camera, bandwidth of Remote Live View, bandwidth of Remote Playback, bandwidth of Net Receive Idle and bandwidth of Net Send Idle.
4. You can click **Refresh** button to get the newest status.

Chapter 10 HDD Management

10.1 Initializing HDDs

Purpose:

A newly installed hard disk drive (HDD) must be initialized before it can be used with your NVR.



A message box pops up when the NVR starts up if there exists any uninitialized HDD.

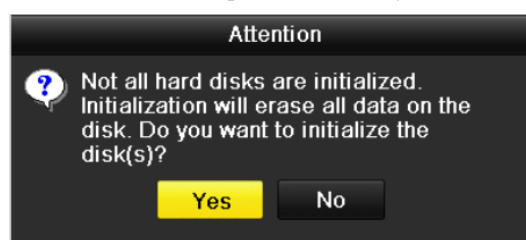


Figure 10.1 Message Box of Uninitialized HDD

Click **Yes** button to initialize it immediately or you can perform the following steps to initialize the HDD.

Steps:

1. Enter the HDD Information interface.

Menu > HDD > General

<input type="checkbox"/> L...	Capacity	Status	Property	Type	Free Space	Gr...	Edit	D...
<input checked="" type="checkbox"/> 1	931.51GB	Normal	R/W	Local	919GB	1	-	-

Figure 10.2 HDD Information Interface

2. Select HDD to be initialized.
3. Click the **Init** button.

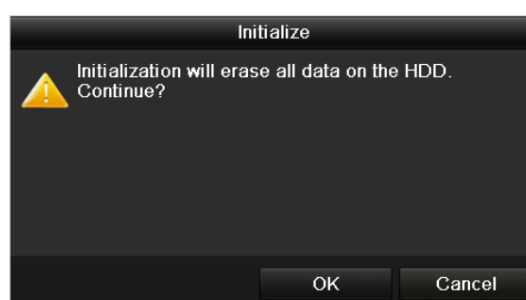


Figure 10.3 Confirm Initialization

4. Select the **OK** button to start initialization.

<input type="checkbox"/> Label	Capacity	Status	Property	Type	Free Space	Gr...	Edit	Del...
<input checked="" type="checkbox"/> 1	931.51GB	Initializing 20%	R/W	Local	0MB	1	-	-

Figure 10.4 Status changes to Formatting

5. After the HDD has been initialized, the status of the HDD will change from *Uninitialized* to *Normal*.

HDD Information								
<input type="checkbox"/> L...	Capacity	Status	Property	Type	Free Space	Gr...	Edit	D...
<input checked="" type="checkbox"/> 1	931.51GB	Normal	R/W	Local	919GB	1	—	—

Figure 10.5 HDD Status Changes to Normal



Initializing the HDD will erase all data on it.

10.2 Checking HDD Status

Purpose:

You may check the status of the installed HDDs on NVR so as to take immediate check and maintenance in case of HDD failure.

Checking HDD Status in HDD Information Interface

Steps:

1. Enter the HDD Information interface.
Menu > HDD>General
2. Check the status of each HDD which is displayed on the list, as shown in Figure 10. 6.

HDD Information								
<input type="checkbox"/> L...	Capacity	Status	Property	Type	Free Space	Gr...	Edit	D...
<input checked="" type="checkbox"/> 1	931.51GB	Uninitialized	R/W	Local	919GB	1	-	-
Total Capacity		931.51GB						
Free Space		919GB						
					Init			
					Back			

Label	Status	Capacity	Free Space	Property	Type	Group
1	Normal	931.51GB	928GB	R/W	Local	1
Total Capacity		931.51GB				
Free Space		928GB				

Figure 10. 7 View HDD Status (2)

10.3 HDD Detection

Purpose:

The device provides the HDD detection function such as the adopting of the S.M.A.R.T. and the Bad Sector Detection technique. The S.M.A.R.T. (Self-Monitoring, Analysis and Reporting Technology) is a monitoring system for HDD to detect and report on various indicators of reliability in the hopes of anticipating failures.

S.M.A.R.T. Settings

Steps:

1. Enter the S.M.A.R.T Settings interface.
Menu > HDD > HDD Detect
2. Select the HDD to view its S.M.A.R.T information list, as shown in Figure 10. 8.

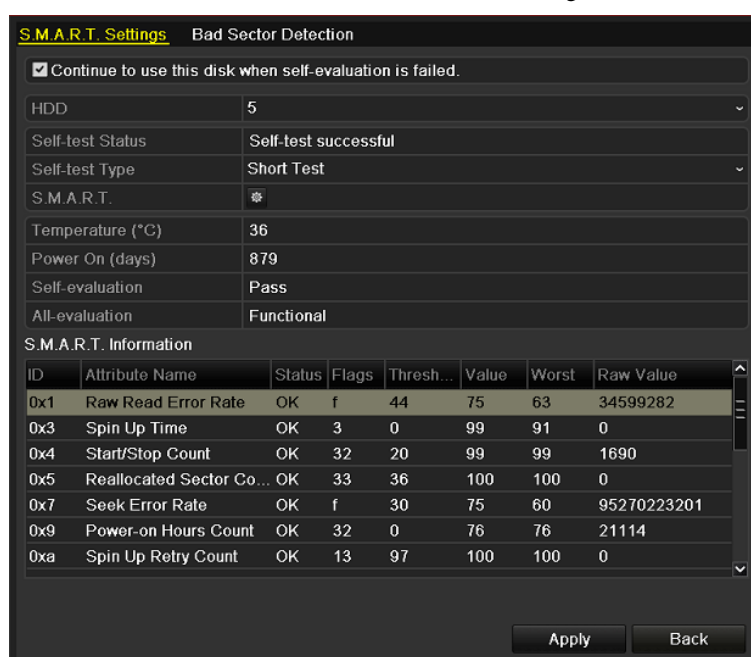



Figure 10. 8 S.M.A.R.T Settings Interface

The related information of the S.M.A.R.T. is shown on the interface.

You can choose the self-test types as Short Test, Expanded Test or the Conveyance Test.

Click the  button to start the S.M.A.R.T. HDD self-evaluation.



If you want to use the HDD even when the S.M.A.R.T. checking is failed, you can check the checkbox of the **Continue to use the disk when self-evaluation is failed** item.

Bad Sector Detection

Steps:

1. Click the Bad Sector Detection tab.
2. Select the HDD No. in the dropdown list you want to configure, and choose All Detection or Key Area Detection as the detection type.
3. Click the **Detect** button to start the detection

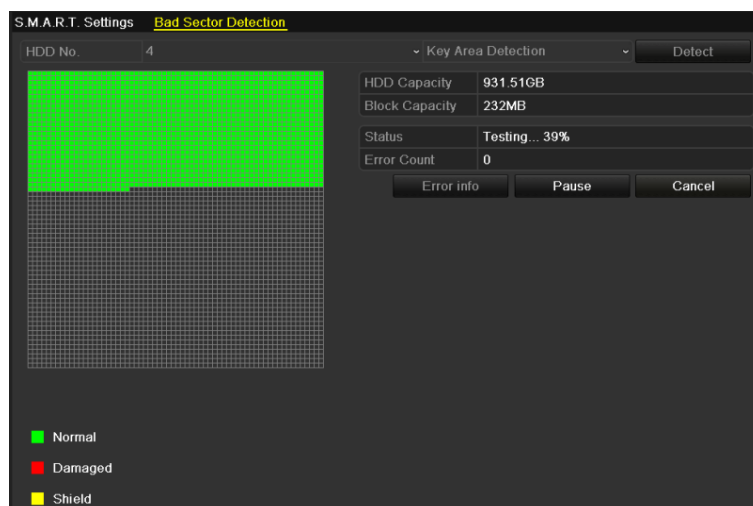


Figure 10. 9 Bad Sector Detection

And you can click **Error info** button to see the detailed damage information

And you can also pause/resume or cancel the detection.

10.4 Configuring HDD Error Alarms

Purpose:

You can configure the HDD error alarms when the HDD status is *Uninitialized* or *Abnormal*.

Steps:

1. Enter the Exception interface.
Menu > Configuration > Exceptions
2. Select the Exception Type to **HDD Error** from the dropdown list.
3. Click the checkbox(s) below to select the HDD error alarm type (s), as shown in Figure 10. 10.



The alarm type can be selected to: Audio Warning, Notify Surveillance Center, and Send Email. Please refer to *Chapter 8.5 Setting Alarm Response Actions*.

Exception	
Exception Type	HDD Error
Audible Warning	<input checked="" type="checkbox"/>
Notify Surveillance Center	<input type="checkbox"/>
Send Email	<input type="checkbox"/>

Figure 10. 10 Configure HDD Error Alarm

-
4. Click the **Apply** button to save the settings

Chapter 11 Camera Settings

11.1 Configuring OSD Settings

Purpose:

You can configure the OSD (On-screen Display) settings for the camera, including date /time, camera name, etc.

Steps:

1. Enter the OSD Configuration interface.
Menu > Camera > OSD
2. Select the camera to configure OSD settings.
3. Edit the Camera Name in the text field.
4. Configure the Display Name, Display Date and Display Week by clicking the checkbox.
5. Select the Date Format, Time Format and Display Mode.

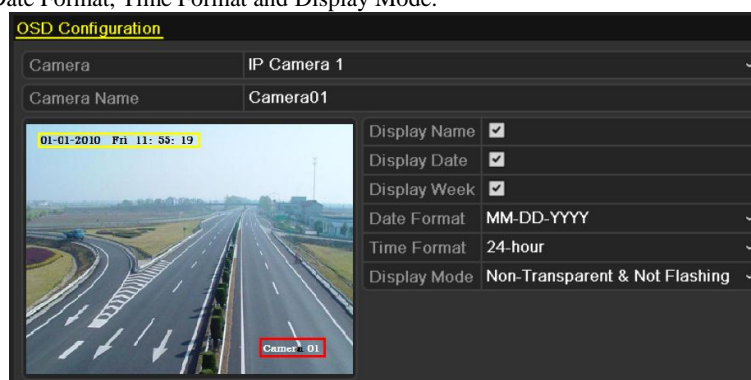


Figure 11. 1 OSD Configuration Interface

6. You can use the mouse to click and drag the text frame on the preview window to adjust the OSD position.
7. Click the **Apply** button to apply the settings.

11.2 Configuring Privacy Mask

Purpose:

You are allowed to configure the four-sided privacy mask zones that cannot be viewed by the operator. The privacy mask can prevent certain surveillance areas to be viewed or recorded.

Steps:

1. Enter the Privacy Mask Settings interface.
Menu > Camera > Privacy Mask
2. Select the camera to set privacy mask.
3. Click the checkbox of **Enable Privacy Mask** to enable this feature.

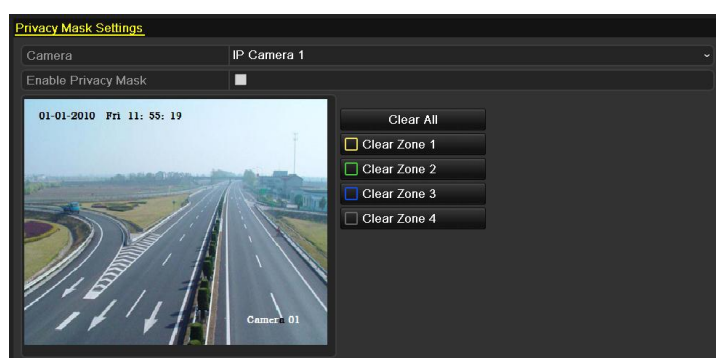


Figure 11. 2 Privacy Mask Settings Interface

4. Use the mouse to draw a zone on the window. The zones will be marked with different frame colors.



Up to 4 privacy masks zones can be configured and the size of each area can be adjusted.

5. The configured privacy mask zones on the window can be cleared by clicking the corresponding Clear Zone1-4 icons on the right side of the window, or click **Clear All** to clear all zones.

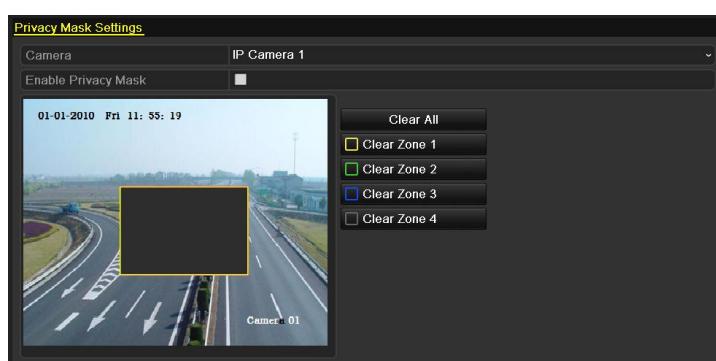


Figure 11. 3 Set Privacy Mask Area

6. Click the **Apply** button to save the settings.

11.3 Configuring Image Parameters

Steps:

1. Enter the Image Settings interface.

Menu > Camera > Image



Figure 11. 4 Image Settings Interface

2. Select the camera to set image parameters.
3. You can click on the arrow to change the value of each parameter.
4. Click the **Apply** button to save the settings.

Chapter 12 NVR Management and Maintenance

12.1 Viewing System Information

12.1.1 Viewing Device Information

Steps:

1. Enter the System Information interface.
Menu >Maintenance >System Info
2. Click the **Device Info** tab to enter the Device Information menu to view the device name, model, serial No. , firmware version and encode version, as shown in Figure 12. 1.

Device Name	Embedded Net DVR
Model	
Serial No.	XXXXXXXXXXXXXXXXXXXX
Firmware Version	Vx.x.x, Build xxxxxx
Encoding Version	Vx.x, Build xxxxxx

Figure 12. 1 Device Information Interface

12.1.2 Viewing Camera Information

Steps:

1. Enter the System Information interface.
Menu >Maintenance>System Info
2. Click the **Camera** tab to enter the Camera Information menu to view the status of each camera, as shown in Figure 12. 2.

Cameras	Camera Name	Status	Motion Det...	Tamper-proof	Video Loss
D1	Camera01	Connected	Used	Used	Not used
D2	Camera 01	Connected	Not used	Not used	Not used
D3	IPCamera 03	Disconnected	Not support...	Not supported	Not support...

Figure 12. 2 Camera Information Interface

12.1.3 Viewing Record Information

Steps:

1. Enter the System Information interface.
Menu >Maintenance>System Info
2. Click the **Record** tab to enter the Record Information menu to view the recording status recording parameters of each camera, as shown in Figure 12. 3.

Cameras	Recorder	Stream	Frame	Bitrate(Kbps)	Resolution	Recorder	Encoder
D1	Not used	Video ...	10fps	512	1280*720(HD720P)		Contin...
D2	Not used	Video	30fps	4096	1920*1080(1080P)		Contin...
D3	Not used	Video ...	30fps	2048	Unknown Resolution		Contin...

Figure 12. 3 Record Information Interface

12.1.4 Viewing Network Information

Steps:

1. Enter the System Information interface.
Menu >Maintenance >System Info
2. Click the **Network** tab to enter the Network Information menu to view the network information, as shown in Figure 12. 4.

NIC	LAN1
IPv4 Address	172.6.23.185
IPv4 Subnet Mask	255.255.255.0
IPv4 Default Gateway	172.6.23.1
IPv6 Address 1	fe80::2ff:8fff:fe0c:f46a/64
IPv6 Address 2	
IPv6 Default Gateway	
Preferred DNS Server	0.0.0.0
Alternate DNS Server	0.0.0.0
Enable DHCP	Disabled
Enable PPPOE	Disabled
PPPOE Address	
PPPOE Subnet Mask	
PPPOE Default Gateway	

Figure 12. 4 Network Information Interface

12.1.5 Viewing HDD Information

Steps:

1. Enter the System Information interface.
Menu >Maintenance>System Info
2. Click the **HDD** tab to enter the HDD Information menu to view the HDD status, free space, property, etc., as shown in Figure 12. 5.

Label	Status	Capacity	Free Space	Property	Type	Group
1	Normal	931.51GB	917GB	R/W	Local	1
Total Capacity		931.51GB				
Free Space		917GB				

Figure 12. 5 HDD Information Interface

12.2 Searching & Export Log Files

Purpose:

The operation, alarm, exception and information of the NVR can be stored in log files, which can be viewed and exported at any time.

Steps:

1. Enter the Log Information interface.

Menu > Maintenance > Log Information

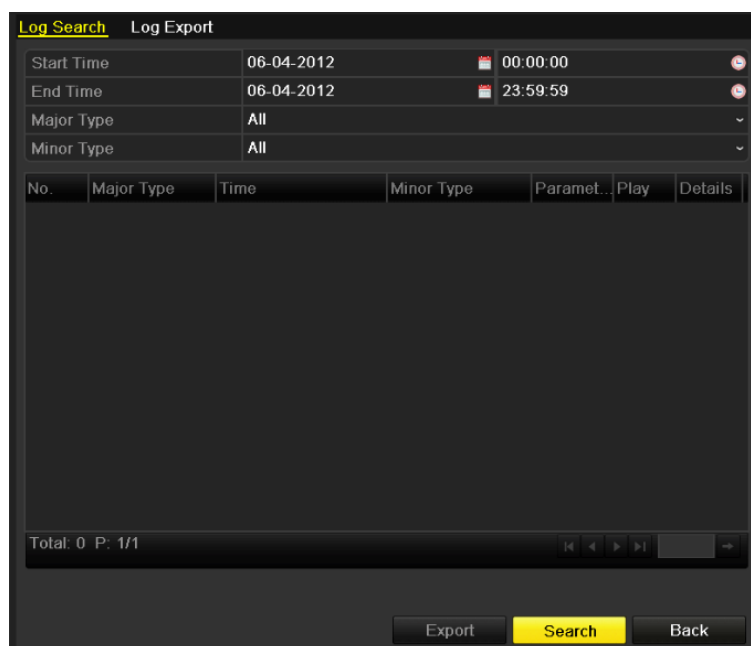


Figure 12. 6 Log Search Interface

2. Set the log search conditions to refine your search, including the Start Time, End Time, Major Type and Minor Type.
3. Click the **Search** button to start search log files.
4. The matched log files will be displayed on the list shown below.

Log Search

Log Export

Start Time	06-04-2012	00:00:00
End Time	06-04-2012	23:59:59
Major Type	All	
Minor Type	All	

No.	Major Type	Time	Minor Type	Paramet...	Play	Details
100	Alarm	06-04-2012 06:12:35	Stop Motion Det...	N/A		
99	Alarm	06-04-2012 06:12:21	Start Motion Det...	N/A		
98	Alarm	06-04-2012 06:10:30	Stop Motion Det...	N/A		
97	Alarm	06-04-2012 06:10:16	Start Motion Det...	N/A		
96	Alarm	06-04-2012 06:07:49	Stop Motion Det...	N/A		
95	Alarm	06-04-2012 06:07:36	Start Motion Det...	N/A		
94	Alarm	06-04-2012 06:02:39	Stop Motion Det...	N/A		
93	Alarm	06-04-2012 06:02:26	Start Motion Det...	N/A		
92	Alarm	06-04-2012 05:59:26	Stop Motion Det...	N/A		
91	Alarm	06-04-2012 05:59:13	Start Motion Det...	N/A		
90	Alarm	06-04-2012 05:45:13	Stop Motion Det...	N/A		
89	Alarm	06-04-2012 05:44:59	Start Motion Det...	N/A		
88	Alarm	06-04-2012 05:43:15	Stop Motion Det...	N/A		

Total: 1052 P: 1/11

Figure 12. 7 Log Search Results



Up to 2000 log files can be displayed each time.

5. You can click the button of each log or double click it to view its detailed information, as shown in Figure 12. 8. And you can also click the button to view the related video files if available.

Log Information	
Time	06-04-2012 05:06:42
Type	Alarm--Start Motion Detection
Local User	N/A
Host IP Address	N/A
Parameter Type	N/A
Camera No.	D3
Description:	N/A
<div>Previous</div> <div>Next</div> <div>OK</div>	

Figure 12. 8 Log Details

6. If you want to export the log files, click the **Export** button to enter the Export menu, as shown in Figure 12. 9.



Figure 12.9 Export Log Files

7. Select the backup device from the dropdown list of **Device Name**.

8. Click the **Export** to export the log files to the selected backup device.

You can click the **New Folder** button to create new folder in the backup device, or click the **Format** button to format the backup device before log export.



- Please connect the backup device to NVR before operating log export.
- The log files exported to the backup device are named by exporting time, e.g., *20110514124841logBack.txt*.

To export all the log files:

You can enter the Log Export interface.

Menu> Maintenance> Log Information> Log Export

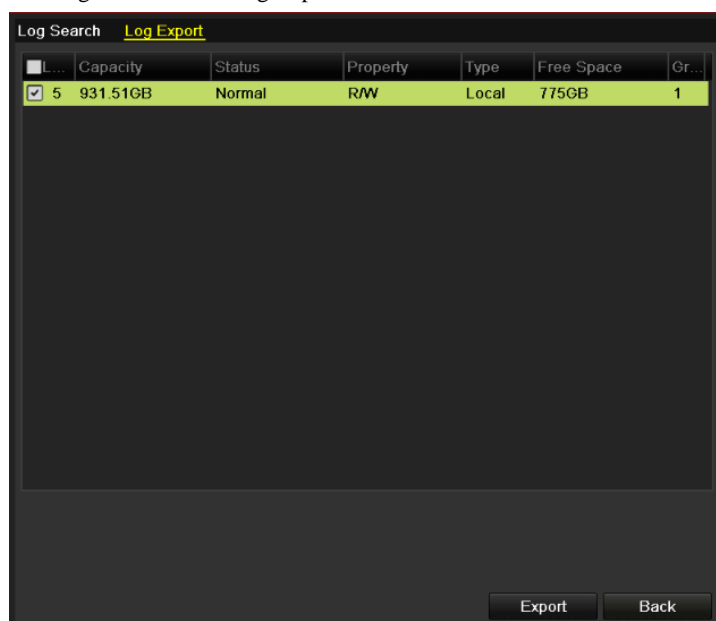


Figure 12.10 Log Export Interface

You can check the checkbox of the HDD.

Click the **Export** button to export all the log files stored in the selected HDD.

12.3 Importing/Exporting Configuration Files

Purpose:

The configuration files of the NVR can be exported to local device for backup; and the configuration files of one NVR can be imported to multiple NVR devices if they are to be configured with the same parameters.

Steps:

1. Enter the Import/Export Configuration File interface.

Menu > Maintenance > Import/Export



Figure 12. 11 Import/Export Config File

2. Click the **Export** button to export configuration files to the selected local backup device.
3. To import a configuration file, select the file from the selected backup device and click the **Import** button.

After the import process is completed, you must reboot the NVR.



After finishing the import of configuration files, the device will reboot automatically.

12.4 Upgrading System

Purpose:

The firmware on your NVR can be upgraded by local backup device or remote FTP server.

12.4.1 Upgrading by Local Backup Device

Steps:

1. Connect your NVR with a local backup device where the update firmware file is located.
2. Enter the Upgrade interface.
Menu >Maintenance>Upgrade
3. Click the **Local Upgrade** tab to enter the local upgrade menu, as shown in Figure 12. 12.

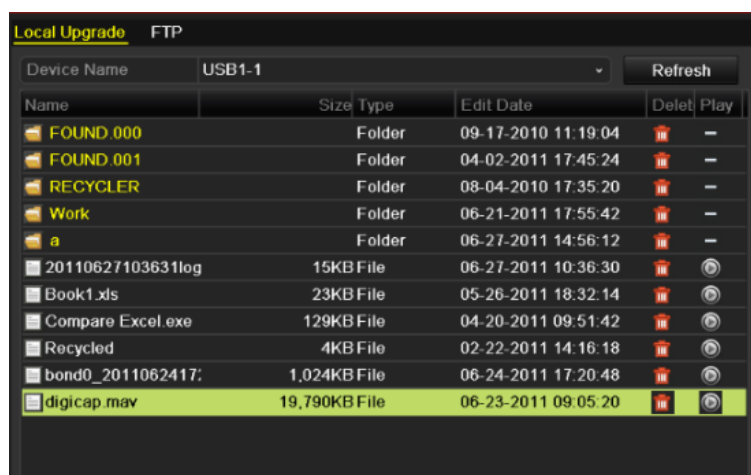


Figure 12. 12 Local Upgrade Interface

4. Select the update file from the backup device.
5. Click the **Upgrade** button to start upgrading.
6. After the upgrading is complete, reboot the NVR to activate the new firmware.

12.4.2 Upgrading by FTP

Before you start:

Configure PC (running FTP server) and NVR to the same Local Area Network. Run the 3rd-party TFTP software on the PC and copy the firmware into the root directory of TFTP.

Steps:

1. Enter the Upgrade interface.
Menu >Maintenance>Upgrade
2. Click the **FTP** tab to enter the local upgrade interface, as shown in Figure 12. 13.

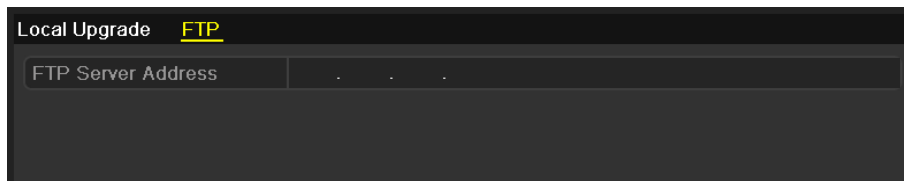


Figure 12. 13 FTP Upgrade Interface

-
3. Enter the FTP Server Address in the text field.
 4. Click the **Upgrade** button to start upgrading.
 5. After the upgrading is complete, reboot the NVR to activate the new firmware.

12.5 Restoring Default Settings

Steps:

1. Enter the Default interface.

Menu > Maintenance > Default

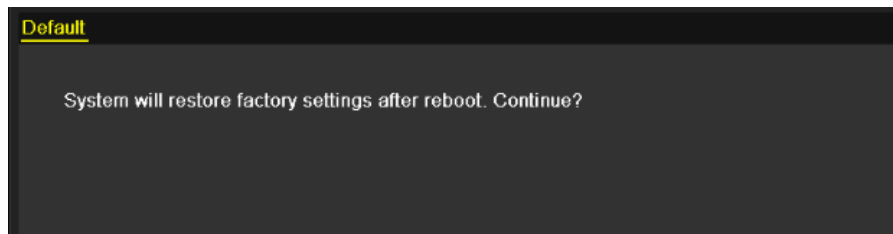


Figure 12. 14 Restore Factory Default

2. Click the **OK** button to restore the default settings.



Except the network parameters (including IP address, subnet mask, gateway, MTU, default route and server port), all other parameters of the device will be restored to factory default settings.

Chapter 13 Others

13.1 Configuring General Settings

Purpose:

You can configure the output resolution, system time, mouse pointer speed through the Menu > Configuration > General interface.

Steps:

1. Enter the General Settings interface.
Menu > Configuration > General
2. Select the **General** tab.

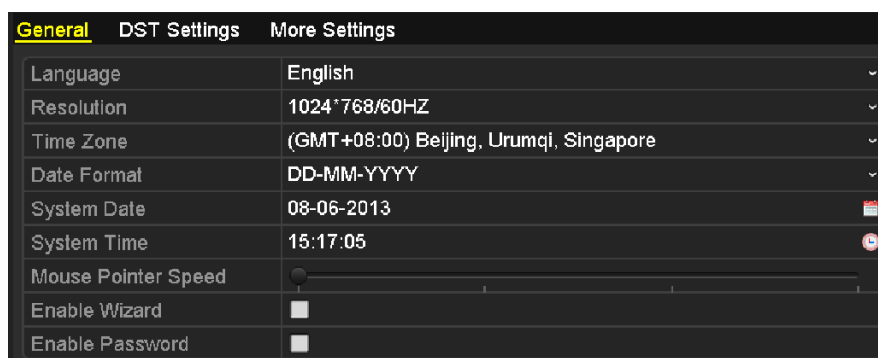


Figure 13. 1 General Settings Interface

3. Configure the following settings:
 - **Language:** The default language used is *English*.
 - **Resolution:** Select the output resolution, which must be the same with the resolution of the monitor screen.
 - **Time Zone:** Select the time zone.
 - **Date Format:** Select the date format.
 - **System Date:** Select the system date.
 - **System Time:** Select the system time.
 - **Mouse Pointer Speed:** Set the speed of mouse pointer; 4 levels are configurable.
 - **Enable Wizard:** Enable/disable the Wizard when the device starts up.
 - **Enable Password:** Enable/disable the use of the login password.
4. Click the **Apply** button to save the settings.

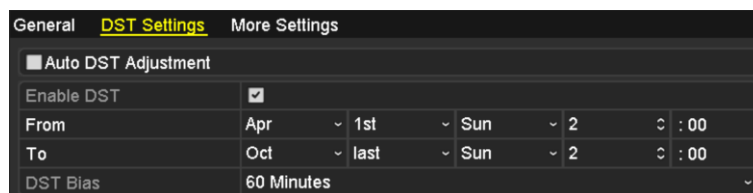
13.2 Configuring DST Settings

Steps:

1. Enter the General Settings interface.

Menu >Configuration>General

2. Choose **DST Settings** tab.



General		DST Settings		More Settings	
<input type="checkbox"/> Auto DST Adjustment					
Enable DST		<input checked="" type="checkbox"/>			
From	Apr	1st	Sun	2	:00
To	Oct	last	Sun	2	:00
DST Bias	60 Minutes				

Figure 13. 2 DST Settings Interface

You can check the checkbox before the Auto DST Adjustment item.

Or you can manually check the Enable DST checkbox, and then you choose the date of the DST period.

3. Click **Apply** button to save the settings.

13.3 Configuring More Settings for Device Parameters

Steps:

1. Enter the General Settings interface.
Menu > Configuration > General
2. Click the **More Settings** tab to enter the More Settings interface, as shown in Figure 13. 3.

General	DST Settings	More Settings
Device Name	Embedded Net DVR	
Device No.	255	
Auto Logout	Never	
Menu Output Mode	HDMI/VGA	

Figure 13. 3 More Settings Interface

3. Configure the following settings:
 - **Device Name:** Edit the name of NVR.
 - **Device No.:** Edit the serial number of NVR. The Device No. can be set in the range of 1~255, and the default No. is 255. The number is used for the remote and keyboard control.
 - **Auto Logout:** Set timeout time for menu inactivity. E.g., when the timeout time is set to *5 Minutes*, then the system will exit from the current operation menu to live view screen after 5 minutes of menu inactivity.
 - **Menu Output Mode:** You can choose the menu display on different video output.
4. Click the **Apply** button to save the settings.

13.4 Managing User Accounts

Purpose:

There is a default account in the NVR: *Administrator*. The *Administrator* user name is *admin* and the password is *12345*. The *Administrator* has the permission to add and delete user and configure user parameters.

13.4.1 Adding a User

Steps:

1. Enter the User Management interface.

Menu >Configuration>User

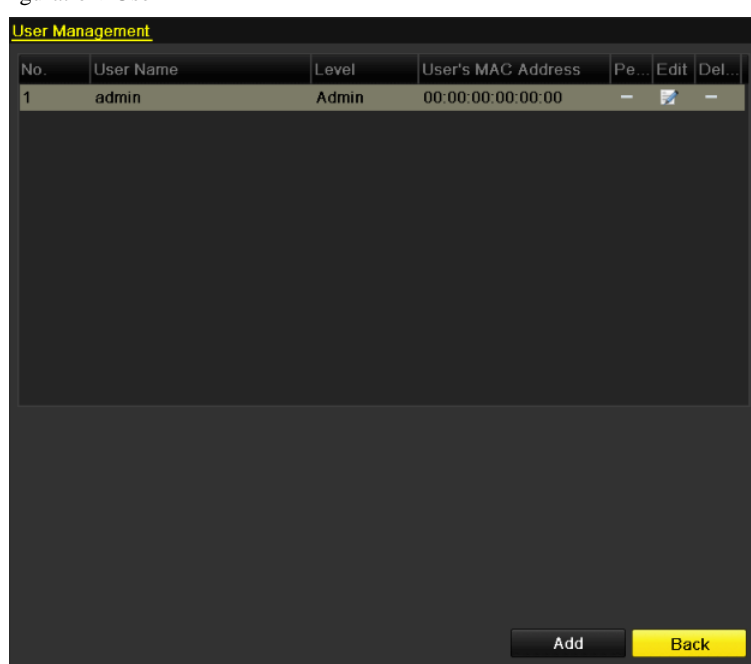


Figure 13. 4 User Management Interface

2. Click the **Add** button to enter the Add User interface.

The screenshot shows the 'Add User' form. It has the following fields: User Name (01), Password (*****), Confirm (*****), Level (Operator), and User's MAC Address (00 : 00 : 00 : 00 : 00 : 00). At the bottom, there are three buttons: 'Apply', 'OK', and 'Cancel'.

User Name	01
Password	*****
Confirm	*****
Level	Operator
User's MAC Address	00 : 00 : 00 : 00 : 00 : 00

Figure 13. 5 Add User Menu

3. Enter the information for new user, including **User Name**, **Password**, **Level** and **User's MAC Address**.
Level: Set the user level to Operator or Guest. Different user levels have different operating permission.
 - **Operator:** The *Operator* user level has permission of Two-way Audio in Remote Configuration and all operating permission in Camera Configuration.
 - **Guest:** The Guest user has no permission of Two-way Audio in Remote Configuration and only has the local/remote playback in the Camera Configuration.
 - **User's MAC Address:** The MAC address of the remote PC which logs onto the NVR. If it is configured and enabled, it only allows the remote user with this MAC address to access the NVR.
4. Click the **OK** button to save the settings and go back to the User Management interface. The added new user will be displayed on the list, as shown in Figure 13. 6.

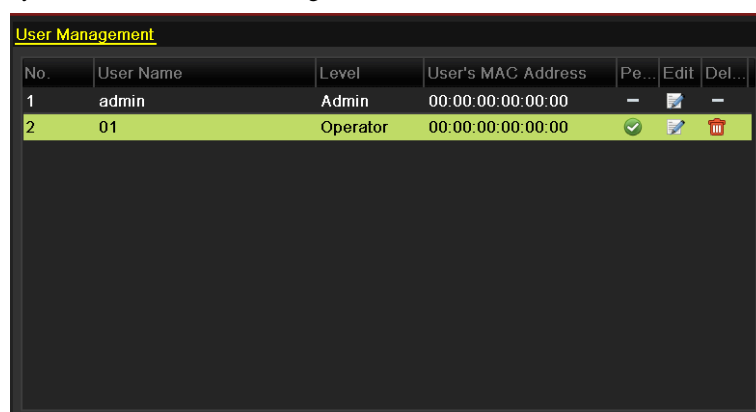



Figure 13. 6 Added User Listed in User Management Interface

5. Select the user from the list and then click the  button to enter the Permission settings interface, as shown in Figure 13. 7.

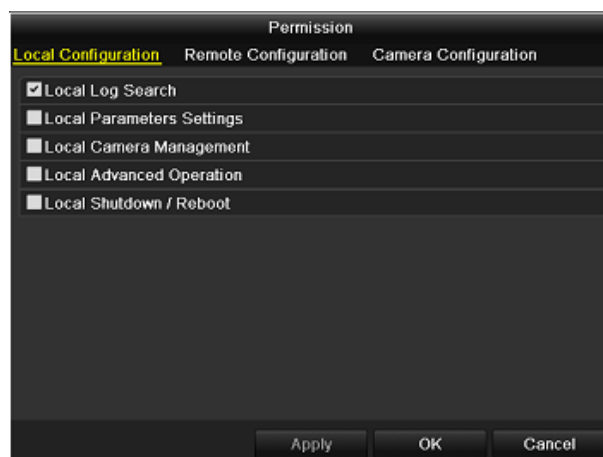


Figure 13. 7 User Permission Settings Interface

6. Set the operating permission of Local Configuration, Remote Configuration and Camera Configuration for the user.

Local Configuration

- Local Log Search: Searching and viewing logs and system information of NVR.
- Local Parameters Settings: Configuring parameters, restoring factory default parameters and importing/exporting configuration files.
- Local Camera Management: The adding, deleting and editing of IP cameras.

- Local Advanced Operation: Operating HDD management (initializing HDD, setting HDD property), upgrading system firmware, clearing I/O alarm output.
- Local Shutdown Reboot: Shutting down or rebooting the NVR.

Remote Configuration

- Remote Log Search: Remotely viewing logs that are saved on the NVR.
- Remote Parameters Settings: Remotely configuring parameters, restoring factory default parameters and importing/exporting configuration files.
- Remote Camera Management: Remote adding, deleting and editing of the IP cameras.
- Remote Video Output Control: Sending remote button control signal.
- Two-Way Audio: Realizing two-way radio between the remote client and the NVR.
- Remote Alarm Control: Remotely arming (notify alarm and exception message to the remote client) and controlling the alarm output.
- Remote Advanced Operation: Remotely operating HDD management (initializing HDD, setting HDD property), upgrading system firmware.
- Remote Shutdown/Reboot: Remotely shutting down or rebooting the NVR.

Camera Configuration

- Remote Live View: Remotely viewing live video of the selected camera (s).
- Local Manual Operation: Locally starting/stopping manual recording and alarm output of the selected camera (s).
- Remote Manual Operation: Remotely starting/stopping manual recording and alarm output of the selected camera (s).
- Local Playback: Locally playing back recorded files of the selected camera (s).
- Remote Playback: Remotely playing back recorded files of the selected camera (s).
- Local PTZ Control: Locally controlling PTZ movement of the selected camera (s).
- Remote PTZ Control: Remotely controlling PTZ movement of the selected camera (s).
- Local Video Export: Locally exporting recorded files of the selected camera (s).

7. Click the **OK** button to save the settings and exit interface.

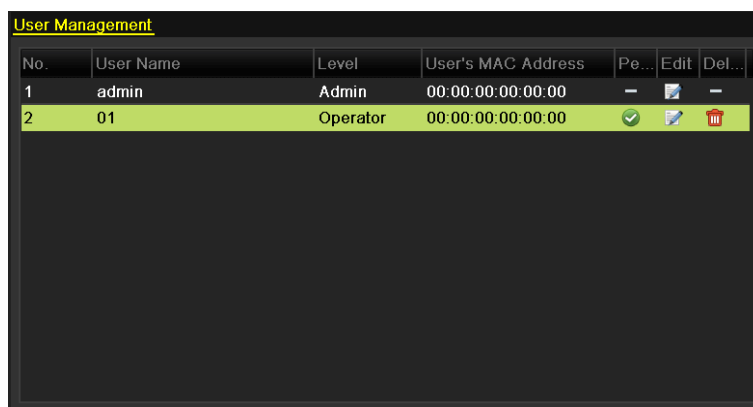


Only the *admin* user account has the permission of restoring factory default parameters.

13.4.2 Deleting a User

Steps:


1. Enter the User Management interface.
Menu > Configuration > User
2. Select the user to be deleted from the list, as shown in Figure 13. 8.



The screenshot shows a 'User Management' window with a table containing two users. The second user, '01' with level 'Operator', is highlighted in green. To the right of the table are three columns of icons: 'Pe...' (minus), 'Edit' (pencil), and 'Del...' (trash).


No.	User Name	Level	User's MAC Address	Pe...	Edit	Del...
1	admin	Admin	00:00:00:00:00:00	—		—
2	01	Operator	00:00:00:00:00:00			

Figure 13.8 User List

3. Click the  icon to delete the selected user.

13.4.3 Editing a User

Steps:

1. Enter the User Management interface.
Menu > Configuration > User
2. Select the user to be edited from the list, as shown in Figure 13.8.
3. Click the  icon to enter the Edit User interface, as shown in Figure 13.9.



The admin user can also be edited.



The 'Edit User' dialog box contains the following fields:

User Name	01
Change Password	<input checked="" type="checkbox"/>
Password	***
Confirm	***
Level	Operator
User's MAC Address	00 :00 :00 :00 :00 :00

At the bottom are 'OK' and 'Cancel' buttons.

Figure 13.9 Edit User Interface

4. Edit the user information, including user name, password, level and MAC address.
Check the checkbox of **Change Password** if you want to change the password of the current user.
5. Click the **OK** button to save the settings and exit the menu.

Appendix

Glossary

- **Dual Stream:** Dual stream is a technology used to record high resolution video locally while transmitting a lower resolution stream over the network. The two streams are generated by the DVR, with the main stream having a maximum resolution of 4CIF and the sub-stream having a maximum resolution of CIF.
- **HDD:** Acronym for Hard Disk Drive. A storage medium which stores digitally encoded data on platters with magnetic surfaces.
- **DHCP:** Dynamic Host Configuration Protocol (DHCP) is a network application protocol used by devices (DHCP clients) to obtain configuration information for operation in an Internet Protocol network.
- **HTTP:** Acronym for Hypertext Transfer Protocol. A protocol to transfer hypertext request and information between servers and browsers over a network
- **PPPoE:** PPPoE, Point-to-Point Protocol over Ethernet, is a network protocol for encapsulating Point-to-Point Protocol (PPP) frames inside Ethernet frames. It is used mainly with ADSL services where individual users connect to the ADSL transceiver (modem) over Ethernet and in plain Metro Ethernet networks.
- **DDNS:** Dynamic DNS is a method, protocol, or network service that provides the capability for a networked device, such as a router or computer system using the Internet Protocol Suite, to notify a domain name server to change, in real time (ad-hoc) the active DNS configuration of its configured hostnames, addresses or other information stored in DNS.
- **Hybrid DVR:** A hybrid DVR is a combination of a DVR and NVR.
- **NTP:** Acronym for Network Time Protocol. A protocol designed to synchronize the clocks of computers over a network.
- **NTSC:** Acronym for National Television System Committee. NTSC is an analog television standard used in such countries as the United States and Japan. Each frame of an NTSC signal contains 525 scan lines at 60Hz.
- **NVR:** Acronym for Network Video Recorder. An NVR can be a PC-based or embedded system used for centralized management and storage for IP cameras, IP Domes and other DVRs.
- **PAL:** Acronym for Phase Alternating Line. PAL is also another video standard used in broadcast televisions systems in large parts of the world. PAL signal contains 625 scan lines at 50Hz.
- **PTZ:** Acronym for Pan, Tilt, Zoom. PTZ cameras are motor driven systems that allow the camera to pan left and right, tilt up and down and zoom in and out.
- **USB:** Acronym for Universal Serial Bus. USB is a plug-and-play serial bus standard to interface devices to a host computer.

Troubleshooting

- **No image displayed on the monitor after starting up normally.**

Possible Reasons

- a) No VGA or HDMI connections.
- b) Connection cable is damaged.
- c) Input mode of the monitor is incorrect.

Steps

1. Verify the device is connected with the monitor via HDMI or VGA cable.
If not, please connect the device with the monitor and reboot.
2. Verify the connection cable is good.
If there is still no image display on the monitor after rebooting, please check if the connection cable is good, and change a cable to connect again.
3. Verify Input mode of the monitor is correct.
Please check the input mode of the monitor matches with the output mode of the device (e.g. if the output mode of NVR is HDMI output, then the input mode of monitor must be the HDMI input). And if not, please modify the input mode of monitor.
4. Check if the fault is solved by the step 1 to step 3.
If it is solved, finish the process.
If not, please contact the engineer from Hikvision to do the further process.

- **There is an audible warning sound “Di-Di-Di-DiDi” after a new bought NVR starts up.**

Possible Reasons

- a) No HDD is installed in the device.
- b) The installed HDD has not been initialized.
- c) The installed HDD is not compatible with the NVR or is broken-down.

Steps

1. Verify at least one HDD is installed in the NVR.
If not, please install the compatible HDD.



Please refer to the “Quick Operation Guide” for the HDD installation steps.

If you don't want to install a HDD, select “Menu>Configuration > Exceptions”, and uncheck the Audible Warning checkbox of “HDD Error”.

2. Verify the HDD is initialized.
 - 1) Select “Menu>HDD>General”.
 - 2) If the status of the HDD is “Uninitialized”, please check the checkbox of corresponding HDD and click the “Init” button.
3. Verify the HDD is detected or is in good condition.
 - 1) Select “Menu>HDD>General”.
 - 2) If the HDD is not detected or the status is “Abnormal”, please replace the dedicated HDD according to the requirement.
4. Check if the fault is solved by the step 1 to step 3.
If it is solved, finish the process.
If not, please contact the engineer from Hikvision to do the further process.

- **The status of the added IP Camera displays as “Disconnected” when it is connected through Hikvision**

Protocol. Select “Menu>Camera>Camera>IP Camera” to get the camera status.

Possible Reasons

- a) Network failure, and the NVR and IP camera lost connections.
- b) The configured parameters are incorrect when adding the IP camera.
- c) Insufficient bandwidth.

Steps

1. Verify the network is connected.

Open the Command Prompt, and execute the ping command. Input “ping IP” (e.g. ping 172.6.22.131).



Simultaneously press **Ctrl** and **C** to exit the ping command.

If there exists return information and the time value is little, the network is normal.

2. Verify the configuration parameters are correct.
 - 1) Select “Menu>Camera>Camera>IP Camera”.
 - 2) Verify the following parameters are the same with those of the connected IP devices, including IP address, protocol, management port, user name and password.
3. Verify the whether the bandwidth is enough.
 - 1) Select “Menu >Maintenance > Net Detect > Network Stat.”.
 - 2) Check the usage of the access bandwidth, and see if the total bandwidth has reached its limit.
4. Check if the fault is solved by the step 1 to step 3.

If it is solved, finish the process.

If not, please contact the engineer from Hikvision to do the further process.

- **The IP camera frequently goes online and offline and the status of it displays as “Disconnected”.**

Possible Reasons

- a) The IP camera and the NVR versions are not compatible.
- b) Unstable power supply of IP camera.
- c) Unstable network between IP camera and NVR.
- d) Limited flow by the switch connected with IP camera and NVR.

Steps

1. Verify the IP camera and the NVR versions are compatible.
 - 1) Enter the IP camera Management interface “Menu > Camera > Camera>IP Camera”, and view the firmware version of connected IP camera.
 - 2) Enter the System Info interface “Menu>Maintenance>System Info>Device Info”, and view the firmware version of NVR.
2. Verify power supply of IP camera is stable.
 - 1) Verify the power indicator is normal.
 - 2) When the IP camera is offline, please try the ping command on PC to check if the PC connects with the IP camera.
3. Verify the network between IP camera and NVR is stable.

Open the Command Prompt, use the ping command and keep sending large data packages to the connected IP camera, and check if there exists packet loss.



Simultaneously press **Ctrl** and **C** to exit the ping command.

Example: Input **ping 172.6.22.131 -l 1472 -f**.

4. Verify the switch is not flow control.

Check the brand, model of the switch connecting IP camera and NVR, and contact with the manufacturer of the switch to check if it has the function of flow control. If so, please turn it down.

5. Check if the fault is solved by the step 1 to step 4.

If it is solved, finish the process.

If not, please contact the engineer from Hikvision to do the further process.

- **No monitor connected with the NVR locally and when you manage the IP camera to connect with the device by web browser remotely, of which the status displays as Connected. And then you connect the device with the monitor via VGA or HDMI interface and reboot the device, there is black screen with the mouse cursor.**

Connect the NVR with the monitor before startup via VGA or HDMI interface, and manage the IP camera to connect with the device locally or remotely, the status of IP camera displays as Connect. And then connect the device with the CVBS, and there is black screen either.

Possible Reasons:

After connecting the IP camera to the NVR, the image is output via the main spot interface by default.

Steps:

1. Enable the output channel.
2. Select “Menu > Configuration > Live View > View”, and select video output interface in the drop-down list and configure the window you want to view.



- The view settings can only be configured by the local operation of NVR.
 - Different camera orders and window-division modes can be set for different output interfaces separately, and digits like “D1” and “D2” stands for the channel number, and “X” means the selected window has no image output.
3. Check if the fault is solved by the above steps.

If it is solved, finish the process.

If not, please contact the engineer from Hikvision to do the further process.

- **Live view stuck when video output locally.**

Possible Reasons:

- a) Poor network between NVR and IP camera, and there exists packet loss during the transmission.
- b) The motion detection and alarm functions are enabled, and the parameters of Main Stream (Normal) and Main Stream (Event) are different. So the image looks stuck due to the image changes between different resolutions.
- c) The frame rate has not reached the real-time frame rate.

Steps:

1. Verify the network between NVR and IP camera is connected.
 - 1) When image is stuck, connect the RS-232 ports on PC and the rear panel of NVR with the RS-232 cable.
 - 2) Open the Super Terminal, and execute the command of “**ping 192.168.0.0 -l 1472 -f**” (the IP address may change according to the real condition), and check if there exists packet loss.



Simultaneously press **Ctrl** and **C** to exit the ping command.

2. Check the parameters of Main Stream (Normal) and Main Stream (Event).

Select “Menu > Record > Parameters > Record”, and set the resolution of Main Stream (Event) the same as the one of Main Stream (Normal).
3. Verify the frame rate is real-time frame rate.

Select “Menu > Record > Parameters > Record”, and set the Frame rate to Full Frame.

4. Check if the fault is solved by the above steps.

If it is solved, finish the process.

If not, please contact the engineer from Hikvision to do the further process.

- **Live view stuck when video output remotely via the Internet Explorer or platform software.**

Possible Reasons:

- a) Poor network between NVR and IP camera, and there exists packet loss during the transmission.
- b) Poor network between NVR and PC, and there exists packet loss during the transmission.
- c) The performances of hardware are not good enough, including CPU, memory, etc..

Steps:

1. Verify the network between NVR and IP camera is connected.

Open the Command Prompt, and execute the command of “**ping 192.168.0.0 -l 1472 -f**” (the IP address may change according to the real condition), and check if there exists packet loss.



Simultaneously press **Ctrl** and **C** to exit the ping command.

2. Verify the network between NVR and PC is connected.

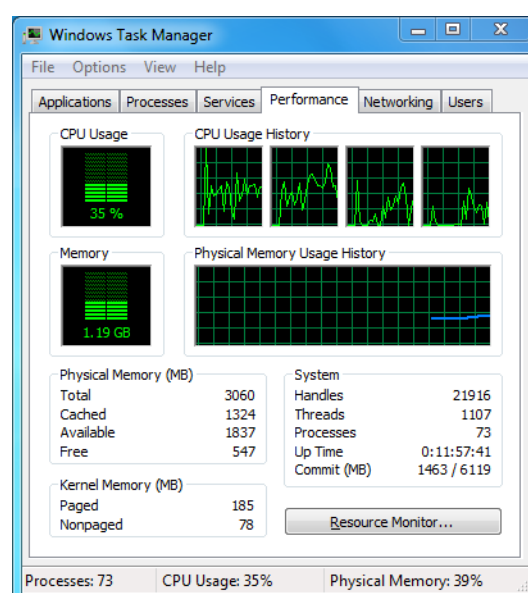
- 1) Open the Command Prompt in the Start menu, or you can press “windows+R” shortcut key to open it.
- 2) Use the ping command to send large packet to the NVR, execute the command of “**ping 192.168.0.0 -l 1472 -f**” (the IP address may change according to the real condition), and check if there exists packet loss.



Simultaneously press **Ctrl** and **C** to exit the ping command.

3. Verify the hardware of the PC is good enough.

Simultaneously press **Ctrl**, **Alt** and **Delete** to enter the windows task management interface, as shown in the following figure.



Windows task management interface

Select the “Performance” tab; check the status of the CPU and Memory.

If the resource is not enough, please end some unnecessary processes.

4. Check if the fault is solved by the above steps.

If it is solved, finish the process.

If not, please contact the engineer from Hikvision to do the further process.

- **When using the NVR to get the live view audio, there is no sound or there is too much noise, or the volume is too low.**

Possible Reasons:

- a) Cable between the pickup and IP camera is not connected well; impedance mismatches or incompatible.
- b) The stream type is not set as “Video & Audio”.
- c) The encoding standard is not supported with NVR.

Steps:

1. Verify the cable between the pickup and IP camera is connected well; impedance matches and compatible.
Log in the IP camera directly, and turn the audio on, check if the sound is normal. If not, please contact the manufacturer of the IP camera.
2. Verify the setting parameters are correct.
Select “Menu > Record > Parameters > Record”, and set the Stream Type as “Audio & Video”.
3. Verify the audio encoding standard of the IP camera is supported by the NVR.
NVR supports G722.1 and G711 standards, and if the encoding parameter of the input audio is not one of the previous two standards, you can log in the IP camera to configure it to the supported standard.
4. Check if the fault is solved by the above steps.
If it is solved, finish the process.
If not, please contact the engineer from Hikvision to do the further process.

- **The image gets stuck when NVR is playing back by single or multi-channel.**

Possible Reasons:

- a) Poor network between NVR and IP camera, and there exists packet loss during the transmission.
- b) The motion detection and alarm functions are enabled, and the parameters of Main Stream (Normal) and Main Stream (Event) are different. So the image looks stuck due to the image changes between different resolutions.
- c) The frame rate is not the real-time frame rate.
- d) The NVR supports up to 16-channel synchronize playback at the resolution of 4CIF, if you want a 16-channel synchronize playback at the resolution of 720p, the frame extracting may occur, which leads to a slight stuck.

Steps:

1. Verify the network between NVR and IP camera is connected.
Open the Command Prompt, and execute the command of “**ping 192.168.0.0 -l 1472 -f**” (the IP address may change according to the real condition), and check if there exists packet loss.



Simultaneously press the **Ctrl** and **C** to exit the ping command.

2. Check the parameters of Main Stream (Normal) and Main Stream (Event).
Select “Menu > Record > Parameters > Record”, and set the resolution of Main Stream (Event) the same as the one of Main Stream (Normal).
3. Verify the frame rate is real-time frame rate.
Select “Menu > Record > Parameters > Record”, and set the Frame Rate to “Full Frame”.
4. Verify the hardware can afford the playback.
Reduce the channel number of playback.
Select “Menu > Record > Parameters > Record”, and set the resolution and bitrate to a lower level.
5. Reduce the number of local playback channel.

Select “Menu > Playback”, and uncheck the checkbox of unnecessary channels.

6. Check if the fault is solved by the above steps.

If it is solved, finish the process.

If not, please contact the engineer from Hikvision to do the further process.

- **No record file found in the NVR local HDD, and prompt “No record file found”.**

Possible Reasons:

- a) The time setting of system is incorrect.
- b) The search condition is incorrect.
- c) The HDD is error or not detected.

Steps:

1. Verify the system time setting is correct.

Select “Menu > Configuration > General > General”, and verify the “Device Time” is correct.

2. Verify the search condition is correct.

Select “Playback”, and verify the channel and time are correct.

3. Verify the HDD status is normal.

Select “Menu > HDD > General” to view the HDD status, and verify the HDD is detected and can be read and written normally.

4. Check if the fault is solved by the above steps.

If it is solved, finish the process.

If not, please contact the engineer from Hikvision to do the further process.

List of Compatible IP Cameras

List of Hikvision IP Cameras



For the list, our company holds right to interpret.

Type	Model	Version	Max. Resolution	Sub-stream	Audio
HD Network Camera	DS-2CD883F-E	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD886BF-E	V4.0.3 build 120913	1920×1080	√	√
	DS-2CD886MF-E	V4.0.3 build 120913	1920×1080	√	√
	DS-2CD854F-E	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD754F-E	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD8254F-E	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD754FWD-E	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD753F-E(I)	V5.0.2 build 130709	1600×1200	√	√
	DS-2CD853F-E	V5.0.2 build 130709	1600×1200	√	√
	DS-2CD8253F-E	V5.0.2 build 130709	1600×1200	√	√
	DS-2CD7153-E	V5.0.4 build 130712	1600×1200	√	×
	DS-2CD876BF-E	V4.0.3 build 120913	1600×1200	√	√
	DS-2CD876MF-E	V4.0.3 build 120913	1600×1200	√	√
	DS-2CD877BF	V4.0.3 build 120913	1920×1080	√	√
	DS-2CD752MF-E	V2.0 build 110426	1600×1200	√	√
	DS-2CD852MF-E	V5.0 build 100106			
	DS-2CD852F-E				
	DS-2CD862MF-E	V2.0 build 110426	1280×960	√	√
		V5.0 build 100106			
	DS-2CD8464F-EI	V5.0.2 build 130709	1280×960	√	√
	DS-2CD863PF/NF-E	V5.0.2 build 130709	1280×960	√	√
	DS-2CD864FWD-E	V5.0.2 build 130709	1280×720	√	√
	DS-2CD763PF/NF-E	V5.0.2 build 130709	1280×960	√	√
	DS-2CD763PF/NF-EI	V5.0.2 build 130709	1280×960	√	√
	DS-2CD7164-E	V5.0.4 build 130712	1280×720	√	×
	DS-2CD783F-E	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD8264FWD-E	V5.0.2 build 130709	1280×720	√	√
	DS-2CD8283F-EI	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD855F-E	V5.0.2 build 130709	1920×1080	√	√
	DS-2CD876MF/BF-E	V4.0.3 build 120913	1920×1080	√	√
	DS-2CD2012-I	V5.0.2 build 130805	1280×960	√	×
	DS-2CD2112-I	V5.0.2 build 130805	1280×960	√	×

Type	Model	Version	Max. Resolution	Sub-stream	Audio
	DS-2CD2132-I	V5.0.2 build 130805	1920×1080	√	×
	DS-2CD2212-I	V5.0.2 build 130805	1280×960	√	×
	DS-2CD2232-I	V5.0.2 build 130805	1920×1080	√	×
	DS-2CD2312-I	V5.0.2 build 130805	1280×960	√	×
	DS-2CD2332-I	V5.0.2 build 130805	1920×1080	√	×
	DS-2CD2612-I	V5.0.2 build 130805	1280×960	√	×
	DS-2CD2712-I	V5.0.2 build 130805	1280×960	√	×
	DS-2CD2612F-IS	V5.0.2 build 130805	1280×960	√	√
	DS-2CD2712F-IS	V5.0.2 build 130805	1280×960	√	√
	DS-2CD2632-I	V5.0.2 build 130805	1920×1080	√	×
	DS-2CD2732-I	V5.0.2 build 130805	1920×1080	√	×
	DS-2CD2632F-IS	V5.0.2 build 130805	1920×1080	√	√
	DS-2CD2732F-IS	V5.0.2 build 130805	1920×1080	√	√
	DS-2CD3110-I	V5.0.6 build 130822	1280×960	√	×
	DS-2CD3210-I	V5.0.6 build 130822	1280×960	√	×
	DS-2CD3310-I	V5.0.6 build 130822	1280×960	√	×
	DS-2CD4012F	V5.0.4 build 130712	1280×960	√	√
	DS-2CD4212F-IS	V5.0.4 build 130712	1280×960	√	√
	DS-2CD4112F-I	V5.0.4 build 130712	1280×960	√	√
	DS-2CD4212F-I	V5.0.4 build 130712	1280×960	√	×
	DS-2CD4124F-I	V5.0.4 build 130712	1920×1080	√	√
	DS-2CD4232FWD-IS	V5.0.4 build 130712	1920×1080	√	√
	DS-2CD4132FWD-I	V5.0.4 build 130712	1920×1080	√	√
	DS-2CD4232FWD-I	V5.0.4 build 130712	1920×1080	√	×
SD Network Camera	DS-2CD7133-E	V5.0.2 build 130709	640×480	√	×
	DS-2CD733F-E(I)	V5.0.2 build 130709	640×480	√	√
	DS-2CD802NF DS-2CD812PF DS-2CD832F DS-2CD892PF/NF	V2.0 build 090522 V2.0 build 090522	704×576	√	√
	DS-2CD893PF(WD)-E	V4.0.1 build 120508	704×576	√	√
	DS-2CD793PF(WD)-E(I)	V4.0.1 build 120508	704×576	√	√
	DS-2CD793NF(WD)-E(I)	V4.0.1 build 120508	704×576	√	√
Intelligent Traffic Camera	DS-2CD966-V(B)	V3.1.0 build 120423	1360×1024	×	×
	DS-2CD976(B) DS-2CD976-V(B)	V3.1.0 build 120423	1600×1200	×	×
	DS-2CD977(B) DS-2CD977(C)	V3.1.0 build 120423	1920×1080	×	×
	DS-2CD9111(B)	V3.4.0 build 130529	1360×1024	×	×
	DS-2CD9121	V3.4.0 build 130513	1600×1200	×	×
	DS-2CD9121A	V3.4.1 build 130703	1600×1200	×	×

Type	Model	Version	Max. Resolution	Sub-stream	Audio
	iDS-2CD9121	V3.3.1 build 130416	1600×1200	×	×
	DS-2CD9122	V3.3.1 build130301	1920×1080	×	×
	DS-2CD9122-H	V3.3.1 build 130309	1920×1080	×	×
Network Speed Dome	DS-2DF1-402	V3.1.6 build20130322	704×576	√	√
	DS-2DF1-518	V3.1.6 build20130322	704×576	√	√
	DS-2DF1-718	V2.0.1 build 110520	704×576	√	√
	DS-2DF5274-A	V5.0.4 build130703	1280×960	√	√
	DS-2DF1-57A	V4.1.6 build 130422	1280×720	√	√
	DS-2DF1-572	V4.1.6 build 130422	1280×720	√	√
	DS-2DF1-573	V1.1.0 build 120702	1280×720	√	√
	DS-2DF1-574D	V4.1.6 build 130422	1280×960	√	√
	DS-2DF1-583	V4.1.6 build 130422	1920×1080	√	√
	DS-2DF7284-A/D/AF	V5.0.4 build130703	1920×1080	√	√
	DS-2DF1-772	V4.1.6 build 130422	1280×720	√	√

List of Third-party IP Cameras



ONVIF compatibility refers to the camera can be supported both when it uses the ONVIF protocol and its private protocols. **Only ONVIF is supported** refers to the camera can only be supported when it uses the ONVIF protocol. **Only AXIS is supported** refers to the function can only be supported when it uses the AXIS protocol.

IPC Manufacturer or Protocol	Model	Version	Max. Resolution	Sub-stream	Audio
ACTI	ACM3401-09L-X-00227	A1D-220-V3.13.16-AC	1280×1024	×	×
	TCM4301-10D-X-00083	A1D-310-V4.12.09-AC	1280×1024	×	√
	TCM5311-11D-X-00023	A1D-310-V4.12.09-AC	1280×960	×	√
ARECONT	AV8185DN	65172	1600×1200	×	×
	AV1305M	65175	1280×1024	√	×
	AV2155	65143	1600×1200	√	×
	AV2815	65220	1920×1080	√	×
	AV3105M	65175	1920×1080	√	×
	AV5105	65175	1920×1080	√	×
AXIS	M1114	5.09.1	1024×640	√	×
	M3011(ONVIF compatibility)	5.21	640×480	√(Only AXIS is supported)	×
	M3014(ONVIF compatibility)	5.21.1	1280×800	√	×
	P3301(ONVIF compatibility)	5.11.2	768×576	√	√(Only AXIS is supported)
	P3304(ONVIF compatibility)	5.2	1440×900	√	√(Only AXIS is supported)
	P3343(ONVIF compatibility)	5.20.1	800×600	√	√(Only AXIS is supported)
	P3344(ONVIF compatibility)	5.20.1	1440×900	√	√(Only AXIS is supported)
	P5532	5.15	720×576	√	×
	Q7404	5.02	720×576	√	√
Bosch(ONVIF compatibility)	AutoDome Jr 800HD	39500450	1920×1080	×	√
	NBC 265 P	7500452	1280×720	×	√
	Dinion NBN-921-P	10500453	1280×720	×	√
Brickcom	FB-130Np(ONVIF compatibility)	V3.1.0.8	1280×1024	×	√
	CB-500Ap(ONVIF compatibility)	V3.2.1.3	1920×1080	×	√

IPC Manufacturer or Protocol	Model	Version	Max. Resolution	Sub-stream	Audio
	WFB-100Ap	V3.1.0.9	1280×800	×	√
Canon	VB-M400	Ver.+1.0.0	1280×960	×	√
	VB-M6000D	Ver.+1.0.0	1280×960	×	×
	VB-M7000F	Ver.+1.0.0	1280×960	×	√
Panasonic(ONVIF compatibility)	WV-SW152	Application:1.66	800×600	√	×
		Image data:1.05			
	WV-SC386	Application:1.66	1280×960	√	√
		Image data:1.05			
	WV-SW155	Application:1.66	1280×960	√	×
		Image data:1.05			
	WV-SW316	Application:1.66	1280×960	√	√
		Image data:2.03			
	WV-SP105	Application:1.66	1280×960	√	×
		Image data:1.03			
	WV-SF132	Application:1.66	640×360	√	×
		Image data:1.03			
	WV-SP102	Application:1.66	640×480	√	×
		Image data:1.03			
	WV-SP509	Application:1.30	1280×960	√	√
		Image data:2.21			
	WV-SW559	Application:1.30	1920×1080	√	√
		Image data:2.21			
	WV-SW558	Application:1.30	1920×1080	√	×
		Image data:2.21			
	WV-SW355	Application:1.66	1280×960	√	√
		Image data:1.04			
	WV-SW352	Application:1.66	800×600	√	√
		Image data:1.04			
	WV-SF342	Application:1.66	800×600	√	√
		Image data:1.06			
	WV-SF332	Application:1.66	800×600	√	√
		Image data:1.06			
	WV-SF346	Application:1.66	1280×960	√	√
		Image data:1.06			
PELCO	D5118	1.8.2-20120327-	1280×960	√	×
		2.9310-A1.7852			
	IXE20DN-AAXVUU2	1.8.2-20120327-	1920×1080	√	×
		2.9081-A1.7852			
	IX30DN-ACFZHB3	1.8.2-20120327-	2048×1536	√	×
		2.9080-A1.7852			

IPC Manufacturer or Protocol	Model	Version	Max. Resolution	Sub-stream	Audio
SAMSUNG(ONVIF compatibility)	5000P	3.10_130416	1280×1024	√	√
SANYO	VCC-HD2300P	2.03-02(110318-00)	1920×1080	×	×
	VCC-HD2500P	2.02-02(110208-00)	1920×1080	×	√
	VCC-HD4600P	2.03-02(110315-00)	1920×1080	×	√
SONY	SNC-CH220	1.50.00	1920×1080	×	×
	SNC-DH220T(ONVIF compatibility)	1.50.00	2048×1536	×	×
	SNC-RH124(ONVIF compatibility)	1.73.00	1280×720	√	√
	SNC-EP580(ONVIF compatibility)	1.53.00	1920×1080	√	√
Vivotek	IP7133	0203a	640×480	×	×
	FD8134(ONVIF compatibility)	0107a	1280×800	×	×
	IP8161(ONVIF compatibility)	0104a	1600×1200	×	√
	IP8331(ONVIF compatibility)	0102a	640×480	×	×
	IP8332(ONVIF compatibility)	0105b	1280×800	×	×
ZAVIO	D5110	MG.1.6.03P8	1280×1024	√	×
	F3106	M2.1.6.03P8	1280×1024	√	√
	F3110	M2.1.6.01	1280×720	√	√
	F3206	MG.1.6.02c045	1920×1080	√	√
	F531E	LM.1.6.18P10	640×480	√	√

